

WORK

BPMLighting®

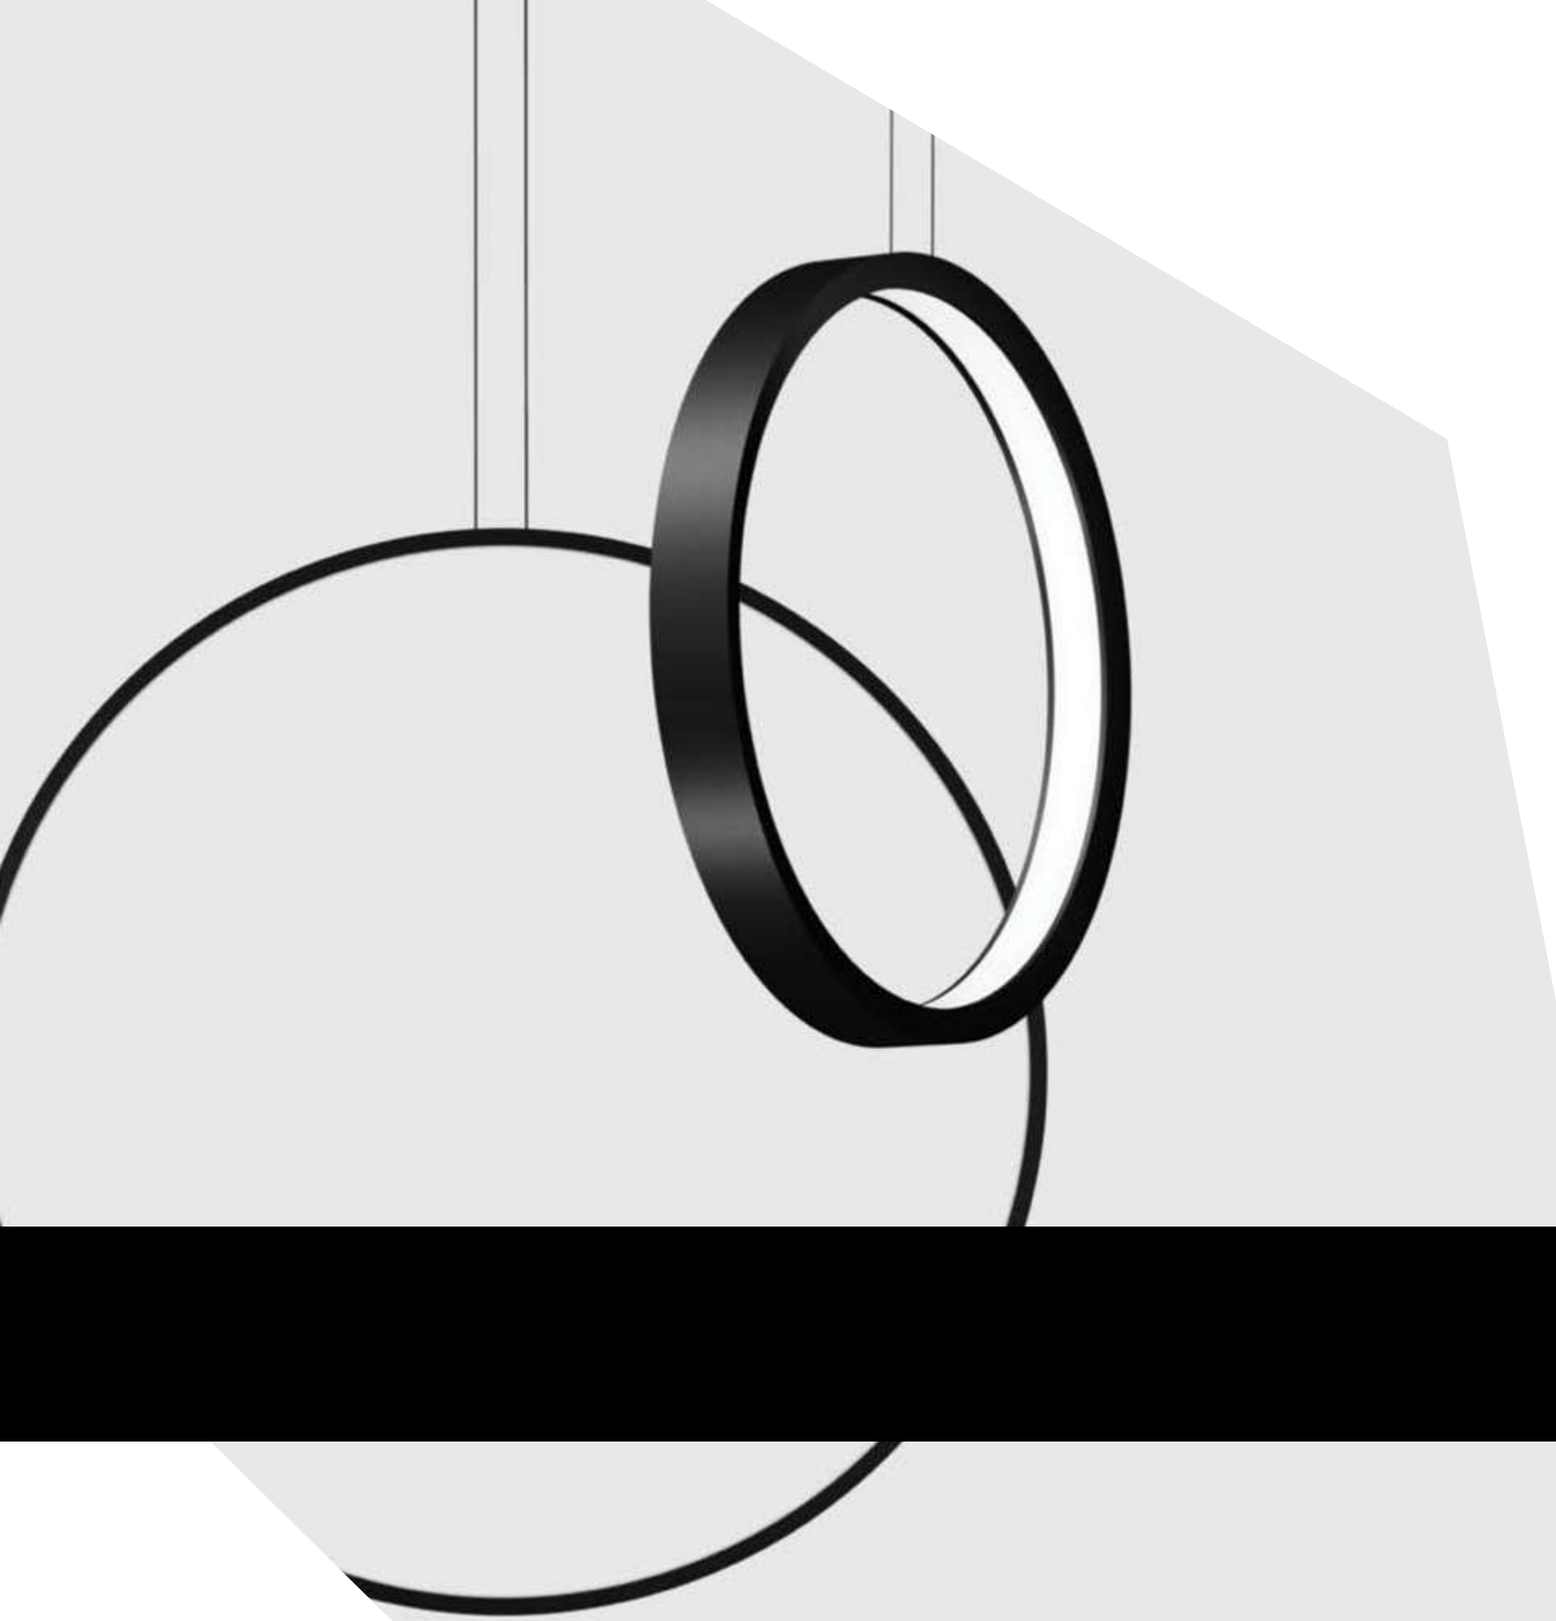

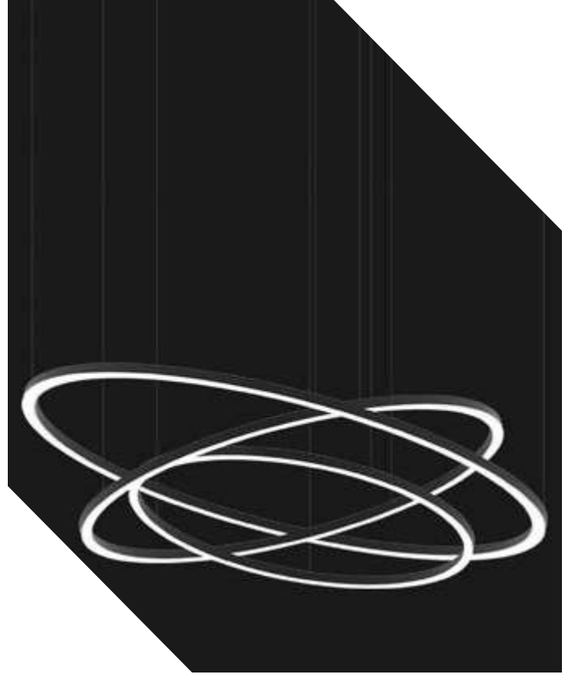

RE-SET

A re-set on principle.
Driven by a nonconformist spirit.

Updated references and new additions to our catalogue that cover global projects and unique collections such as Outdoor CEM and BPM Acoustic.

That's how we do things. There is no other option. Developing increasingly specialised products and more efficient solutions. So the future will always be brighter.

Resetear por principios.
Por impulso y por espíritu inconformista.

Referencias que se actualizan, familias que se completan para abarcar proyectos globales y nuevas colecciones como Outdoor CEM y BPM Acoustic que se incorporan a nuestro catálogo.

Ese es el camino. No hay otro. Evolucionar en productos cada vez más especializados y en soluciones más eficientes. El Futuro será, siempre, más brillante.



Bernardo Palomares








RE-ADY

We have re-set and regrouped to continue as your lighting partner of choice. With a new brand image, updated virtual channels and a new catalogue concept that makes sure everyone is on the same page.

Sharing the creative process closely, co-creating and making it happen. Giving free rein to creativity, without limits, open to everyone's opinions and desires. At BPM Lighting, we know what we are doing, and the result is brilliant when we do it together. "Let's get brighter."

Reseteamos, reordenamos y estamos listos para seguir siendo su partner industrial de referencia. Imagen de marca renovada, nuestras ventanas virtuales actualizadas y un nuevo concepto de catálogo pensado para un trabajo conjunto más técnico y funcional.

Crear juntos, estar más cerca, compartir, cooperar, sumar. Dar rienda suelta a la creatividad, sin límites, abiertos a cualquier punto de vista. En BPM Lighting lo tenemos claro: Lo haremos juntos, y el resultado será brillante. "Let's get brighter".

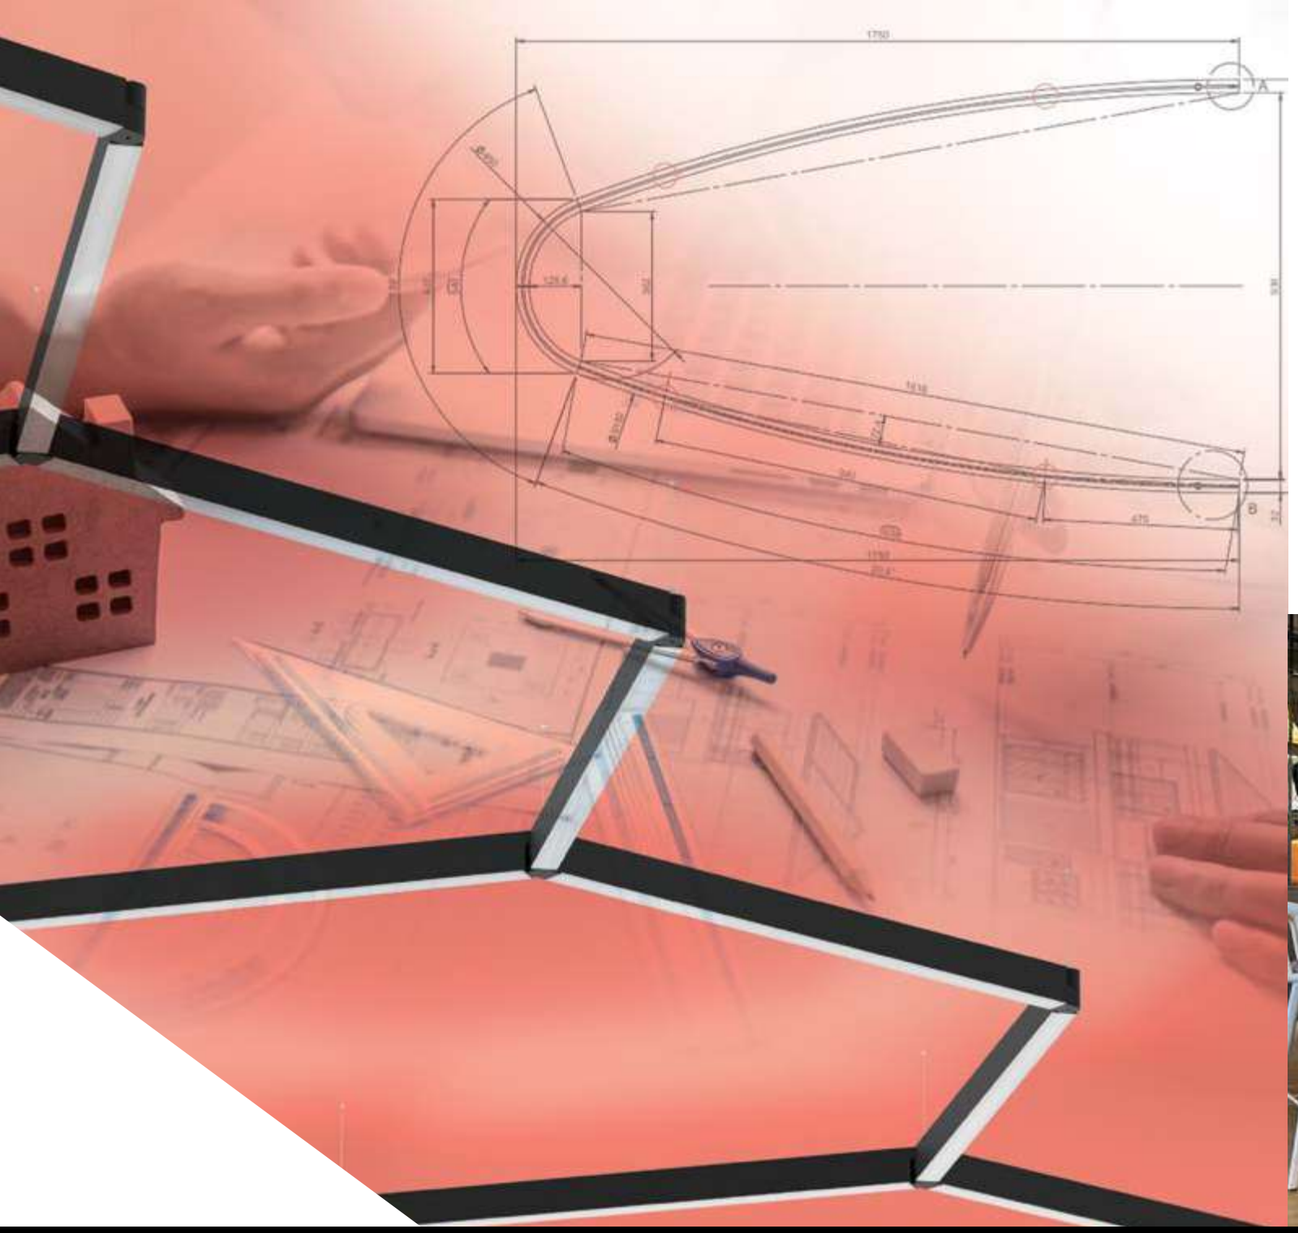

The idea and the result. And avant-garde technology at your service along the way. Our team of experts at BPM Lighting have the experience and resources you need to offer superb lighting products that adapt to every need.

Whatever the project, whether for a small room at home or a large retail establishment, we ensure a perfect combination of design and efficiency, both inseparable qualities for shaping your decorative scheme.

At BPM Lighting, personal service and customisation are among our main strengths: lighter finishes, more colourways, innovative fixtures, and versatile installation systems. Our mission is to satisfy your requirements for a dazzling finish.






La idea y el resultado. Y en el proceso, la tecnología más puntera a su servicio. En BPM Lighting contamos con un equipo profesional altamente especializado, con la experiencia y los recursos que nos permiten ofrecer soluciones lumínicas del más alto nivel y adaptadas a cada necesidad.

En cualquier proyecto, sea para una pequeña estancia del hogar o una gran superficie comercial, diseño y eficiencia han de encajar de manera perfecta, son cualidades inseparables, forman parte de una misma pieza que se amolda a cada instalación.

En BPM Lighting el trabajo personalizado y la costumización son pilares fundamentales: acabados más ligeros, mayor gama de colores, apliques innovadores, sistema de instalación versátiles. El objetivo: encajar las posibilidades para conseguir un acabado deslumbrante.

RE-DESIGN

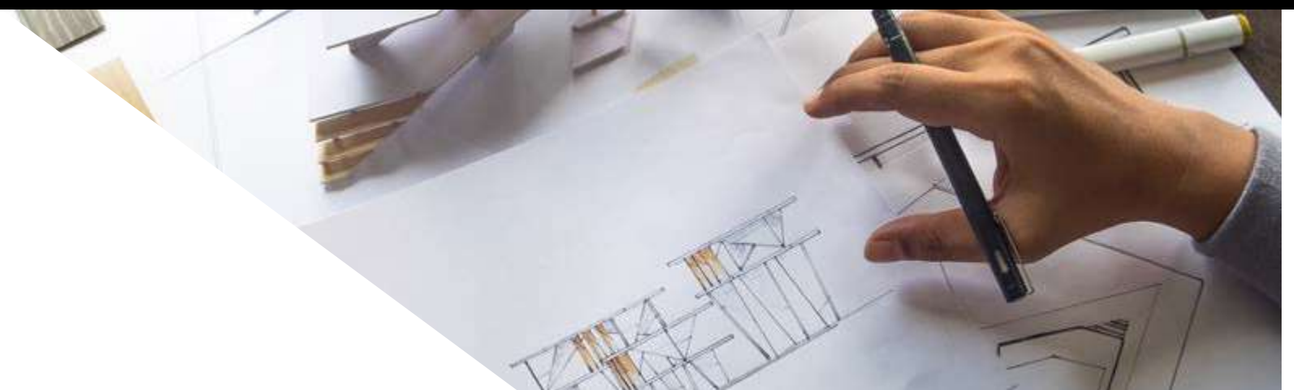





The best of BPM Lighting is yet to come. However, resting on our laurels is not part of our corporate philosophy. We never stop building new families, making improvements and evolving our existing success stories. It is never enough.

That's why we have an R&D+i department with its own laboratory. That's where we design, analyse, test and optimise our designs to create trend-setting advanced lighting solutions.

State-of-the-art technology combined with our expert know gives us a competitive advantage, added value that keeps us at the forefront of the industry to offer stand-out services and products.

Lo mejor de BPM Lighting está aún por llegar. Acomodarse no entra en nuestra filosofía de empresa. Mientras desarrollamos nuevas familias se contemplan sus mejoras y evoluciones. Nunca es suficiente.

Por ello contamos con un departamento de I+D+i dotado de laboratorio propio. En él diseñamos, estudiamos, testamos y optimizamos nuestros productos para obtener como resultado soluciones lumínicas avanzadas que marquen tendencia en nuestro sector.

La tecnología punta, combinada con el know how de nuestros desarrolladores garantizan esa ventaja competitiva, ese valor añadido que nos permite ir por delante en oferta de servicios y productos.

RE-THINK






Bespoke. We co-create to achieve excellence.
BPM BESPOKE MADRID participates in the global BPM Lighting project as a meeting point for professional lighting experts, creating unique lighting solutions customised and designed for each project. BE SPOKE LONDON was the first of these spaces to revolutionise ways of working together on projects. The new premises in Las Rozas, Madrid draws on our experiences and is adapted to the needs of the domestic market. Interior designers, architects, and builders are welcomed with open arms to a working forum with an open horizon, without limitations, where dialogue amplifies everyone's capabilities. And the result will be brilliant.

But the revolution will also be taken beyond European borders to the USA, where BPM Lighting is in the throes of making a mark with specific products and sales strategies. A new market is broadening our horizons and will herald a new era for our business project.

BESPOKE LONDON



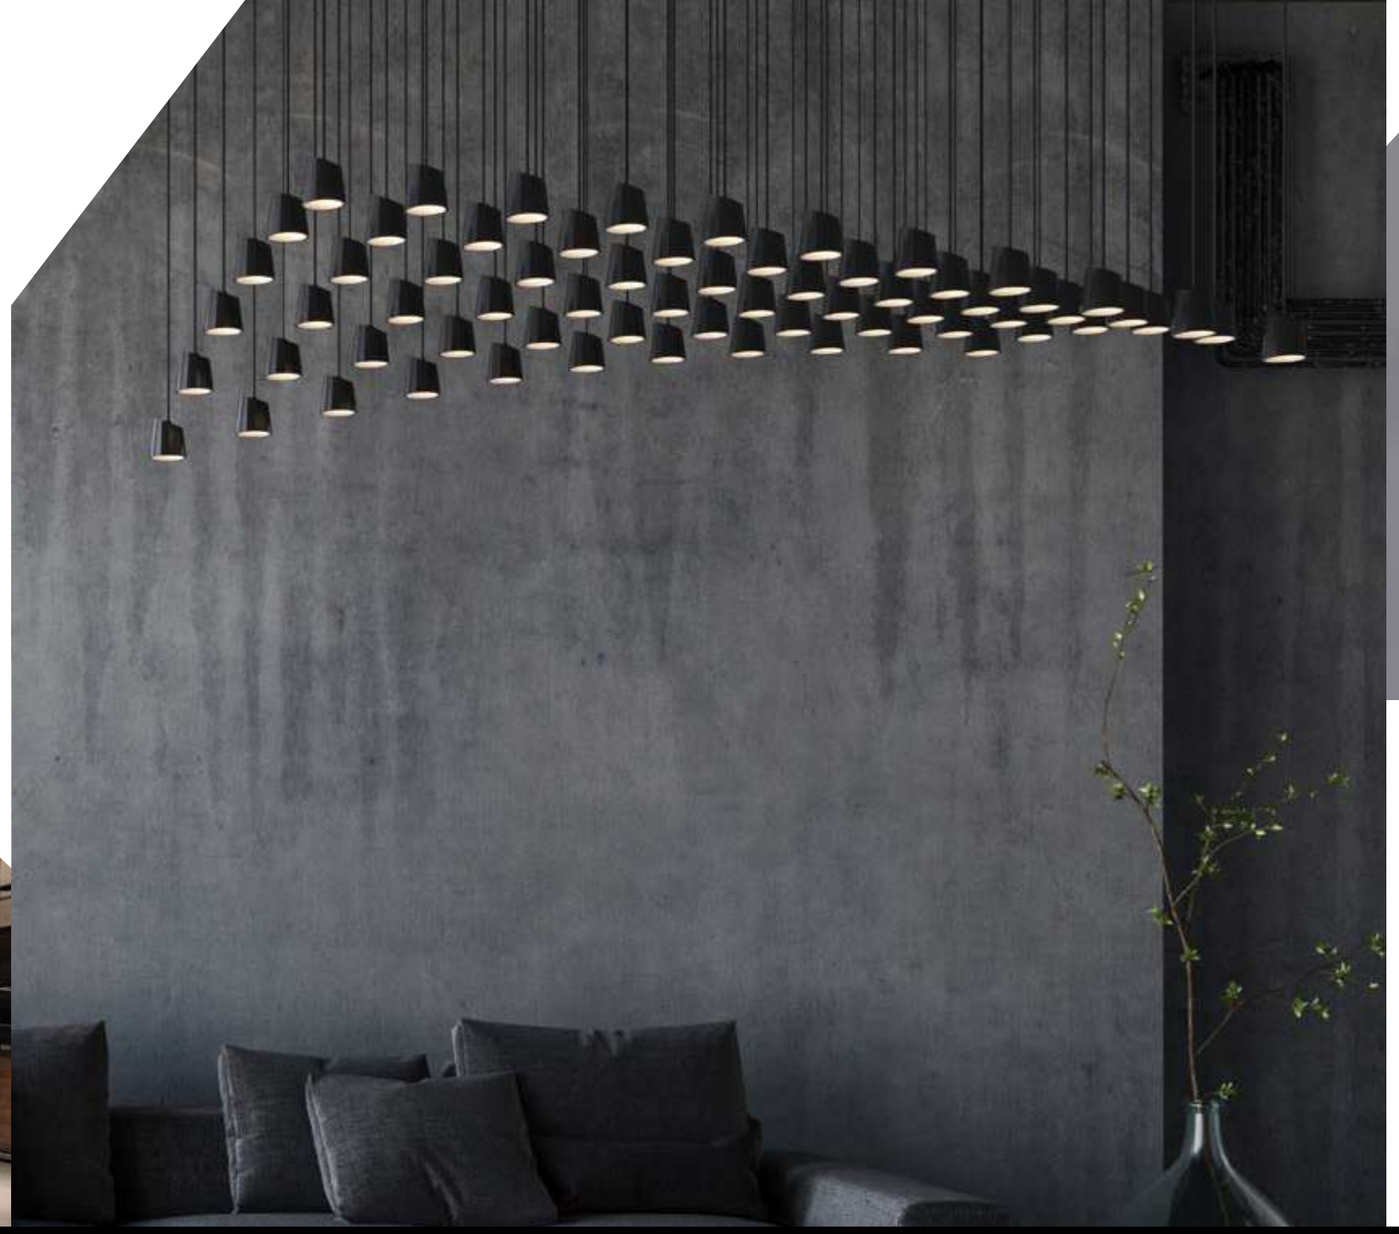



BESPOKE MADRID

Bespoke. O lo que es lo mismo: co-crear para buscar la excelencia.
BPM BESPOKE MADRID se suma al proyecto global de BPM Lighting para convertirse en un punto de encuentro de profesionales que buscan soluciones lumínicas únicas, personalizadas y pensadas para cada proyecto específico. BE SPOKE LONDON fue el primer espacio de estas características que supuso una auténtica revolución en la manera de concebir proyectos de forma conjunta. Las nuevas instalación de Las Rozas en Madrid se nutre de la experiencia adquirida adaptándose a las necesidades del mercado nacional.

Interioristas, arquitectos, proyectistas, constructores tienen las puertas abiertas de un foro de trabajo en el que todo está por hacer, sin limitaciones, donde diálogo servirá para amplificar capacidades. Y el resultado será brillante.

RE-VOLUTION





Sustainability and health values. Rather than paying lip service to these qualities, we have made a real commitment. At BPM Lighting, we take on our role as manufacturers to endorse our commitment to the environment and people's well-being.

We abide by certifications, standards and guidelines such as the International Association of Lighting Designers (ALD) and Lighting Industry Resource Council (LIRC) for WELL rating systems.

Resources may be limited, but, fortunately, creativity is boundless. Re-think production methods, and offer lighting solutions in line with health and well-being. That's the way we work.

Sostenibilidad y valores de la salud. No es una ambiciosa declaración de intenciones, es la única opción viable. En BPM Lighting asumimos nuestro papel de fabricantes para refrendar el compromiso con el medio ambiente y con el bienestar de las personas.

Para ello nos servimos de pautas y estándares certificados como IALD (Asociación Internacional de Diseñadores de Iluminación) y el LIRC (Consejo de Recursos de la Industria de la Iluminación) para los sistemas de calificación WELL.

Los recursos son limitados, pero por suerte la creatividad no. Repensar las formas de producir, ofrecer soluciones lumínicas en consonancia con la salud y el bienestar. En eso trabajamos.

RE-SPECT



RE-IMAGINE

Our culture balance between tradition, innovation, tech development and industrial engineering where design is translated into a product with the utmost technical precision, lasting good looks and a high standard of technological components.

All this at the service of an idea, because our goal is to help you design the perfect Lighting solution for your project.

Let's get brighter, let's co-create, let us help you with what we do best, light!

Nuestro ADN apuesta por el diseño y la fabricación, una misma cultura que equilibra la tradición, la innovación, el desarrollo tecnológico y la ingeniería industrial. Y todo ello se traduce en un producto que tiene la máxima precisión técnica, una estética duradera y un alto estándar tecnológico.

Todo ello al servicio de una idea, porque nuestro objetivo es diseñar la perfecta solución lumínica para tu proyecto.

¡Co-creemos, brillemos juntos, déjanos ayudarte con lo que mejor sabemos hacer, luz!

VISUAL INDEX

ALABAMA	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
ALABAMA 10158	 PAG. XXX	 PAG. XXX	 PAG. XXX	 PAG. XXX		
ALABAMA S LIGHT 10192	 PAG. XXX	 PAG. XXX				
ALABAMA SLIM 310002	new  PAG. XXX	new  PAG. XXX				
ALABAMA SUPER SLIM 310001	new  PAG. XXX	new  PAG. XXX				
ALABAMA SUPER SLIM TILT 310007	new  PAG. XXX					
ALABAMA SLIGHT SQ 10194	 PAG. XXX	 PAG. XXX				

OHIO	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
OHIO 10188	new  PAG. XXX	new  PAG. XXX	 PAG. XXX	 PAG. XXX		
OHIO SQ 10204			 PAG. XXX	 PAG. XXX		

ALTAIR	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
ALTAIR 10172	 PAG. XXX	 PAG. XXX		 PAG. XXX		

VISUAL INDEX

ALBERTA	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
ALBERTA 10176	 PAG. XXX		 PAG. XXX	 PAG. XXX		
ALBERTA S LIGHT 10193	 PAG. XXX	 PAG. XXX				
ALBERTA SOFT 10217	 PAG. XXX	 PAG. XXX	new  PAG. XXX			
ALBERTA DUE 10250	new  PAG. XXX					
ALBERTA DUE MOVE 310004	new  PAG. XXX					
ALBERTA INSIDE 10243	new  PAG. XXX	new  PAG. XXX				
ALBERTA S LIGHT ECCENTRIC 310005	new  PAG. XXX	new  PAG. XXX				
ALBERTA INSIDE VERTICAL 310008	new  PAG. XXX					
ALBERTA INSIDE V-TILT 310009	new  PAG. XXX					

FLORIDA	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
FLORIDA 10190	 PAG. XXX	 PAG. XXX	 PAG. XXX	 PAG. XXX		
FLORIDA SQ 10191	 PAG. XXX	 PAG. XXX	 PAG. XXX	 PAG. XXX		

VISUAL INDEX

ALBA	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
ALBA PLUS 10178	 PAG. XXX	 PAG. XXX	 PAG. XXX	PAG. XXX	 new PAG. XXX	
ALBA 10160	 PAG. XXX	 PAG. XXX	 PAG. XXX	PAG. XXX	 new PAG. XXX	 PAG. XXX
ALBA MINI 10211	 PAG. XXX	 PAG. XXX	 PAG. XXX	PAG. XXX		
ALBA DOUBLE 10215	 new PAG. XXX					 new PAG. XXX
ALBA PLUS ASIMETRIC 210008	 new PAG. XXX	 new PAG. XXX	 new PAG. XXX	 new PAG. XXX		
ALBA ASIMETRIC 210009	 new PAG. XXX	 new PAG. XXX	 new PAG. XXX	 new PAG. XXX		 new PAG. XXX
ALBA NOVUS 210011	 new PAG. XXX					

WING	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
WING 10200	 PAG. XXX	 PAG. XXX	 PAG. XXX	 PAG. XXX		

ALZIRA	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
ALZIRA 10169	 PAG. XXX					 PAG. XXX

EDGE	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
EDGE 210014		 new PAG. XXX				

VISUAL INDEX

LINGGO	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
LINGGO 210002	 new PAG. XXX	 new PAG. XXX				
LINGGO MINI 210003	 new PAG. XXX	 new PAG. XXX				

OKKIA	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
OKKIA 210007	 new PAG. XXX	 new PAG. XXX				

GUS	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
GUS 210017	 new PAG. XXX					

BUBBLE	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
BUBBLE 210010	 new PAG. XXX	 new PAG. XXX				

ALARIK	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
ALARIK 10225	 PAG. XXX	 PAG. XXX		 PAG. XXX		
ALARIK SLIM 20224	 new PAG. XXX	 new PAG. XXX	 new PAG. XXX	 new PAG. XXX		
ALARIK SLIM ROUND 210019	 new PAG. XXX	 new PAG. XXX				
ALARIK MINI 210006	 new PAG. XXX	 new PAG. XXX		new PAG. XXX		
ALARIK MINI ROUND 210004	 new PAG. XXX					

VISUAL INDEX

MODULIGHT	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
MODULIGHT 10210	 PAG. XXX	 PAG. XXX	 PAG. XXX	 PAG. XXX		

OKKO MODULAR	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
OKKO MODULAR 10254	 PAG. XXX	 PAG. XXX				
OKKO MODULAR LINE 210012	 PAG. XXX	 PAG. XXX				



OVALI MODULAR	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
OVALI MODULAR 10252	 PAG. XXX	 PAG. XXX				
OVALI MODULAR LINE 210013	 PAG. XXX	 PAG. XXX				

BOLD	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
BOLD 210001	 PAG. XXX	 PAG. XXX	 PAG. XXX			
BOLD LINE 210015	 PAG. XXX	 PAG. XXX	 PAG. XXX			
TRIBOLD 210018	 PAG. XXX	 PAG. XXX				

EYE	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
EYE 210016	 PAG. XXX	 PAG. XXX		 PAG. XXX		

VISUAL INDEX

ACOUSTIC

ACOUSTIC	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
ACOUSTIC LAMBDA 230001	 PAG. XXX	 PAG. XXX				
ACOUSTIC LINGGO MINI 230007	 PAG. XXX					
ACOUSTIC ALBA MINI 230008	 PAG. XXX					
ACOUSTIC ALARIK 230009	 PAG. XXX					
ACOUSTIC OKKO 230003	 PAG. XXX					
ACOUSTIC ALBERTA SOFT 230010	 PAG. XXX					
ACOUSTIC ALZIRA 230002	 PAG. XXX					 PAG. XXX
ACOUSTIC ALBA 230004	 PAG. XXX	 PAG. XXX				
ACOUSTIC ALABAMA 460001 | 460003	 PAG. XXX					
ACOUSTIC KLIMT FIX 460002 | 460004	 PAG. XXX					
ACOUSTIC ACCESORIES AC | RD | SQ | VT | FL | MD	 PAG. XXX	 PAG. XXX				 PAG. XXX

VISUAL INDEX

MARTORELL	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
MARTORELL 20115	 PAG. XXX	 PAG. XXX	 PAG. XXX	 PAG. XXX	 PAG. XXX	
MARTORELL MOVE 20110		 PAG. XXX	 PAG. XXX			
MARTORELL TUBE MOVE 20138		 PAG. XXX			 PAG. XXX	
MARTORELL CRATE 20176		 PAG. XXX	 PAG. XXX			
MARTORELL MINI CRATE 20175		 PAG. XXX	 PAG. XXX			
MARTORELL SQ 20132		 PAG. XXX				
MARTORELL SQ2 20133		 PAG. XXX				
MARTORELL TARREGA 20117			 PAG. XXX	 PAG. XXX		
MARTORELL TARREGA SQ 20116			 PAG. XXX	 PAG. XXX		
MARTORELL TARREGA SQ2 20119			 PAG. XXX			
MARTORELL TUBULAR 40 20192	 PAG. XXX	 PAG. XXX new				
MARTORELL TUBULAR 60 20196	 PAG. XXX	 PAG. XXX new				
MARTORELL TUBULAR TILT 20195		 PAG. XXX				

VISUAL INDEX

KLIMT	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
KLIMT 20134		 PAG. XXX	 PAG. XXX		 PAG. XXX	
KLIMT FIX 20135		 PAG. XXX new	 PAG. XXX new			

KLIMT GEO	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
GEO 30511		 PAG. XXX new	 PAG. XXX new		 PAG. XXX new	

LUK	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
LUK FREIR 20018		 PAG. XXX	 PAG. XXX	 PAG. XXX		
LUK FREIR 2 20019		 PAG. XXX	 PAG. XXX	 PAG. XXX		
LUK 20028			 PAG. XXX			
LUK 2 20071			 PAG. XXX			
LUK CRUSADER 20082		 PAG. XXX			 PAG. XXX	
LUK HAWKEYE 20083		 PAG. XXX			 PAG. XXX	
LUK HAWKEYE 2 20084		 PAG. XXX			 PAG. XXX	


VISUAL INDEX

CUBE	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
CUBE SQ 8201		 PAG. XXX	 PAG. XXX	 PAG. XXX		
CUBE SQ2 8202		 PAG. XXX	 PAG. XXX	 PAG. XXX		
CUBE SQ3 8203		 PAG. XXX	 PAG. XXX	 PAG. XXX		
CUBE TUBE 9050 | 9052	 PAG. XXX	 PAG. XXX			 PAG. XXX	
CUBE TUBE MOVE 9051 | 9053	 PAG. XXX	 PAG. XXX				
CUBE SPOT MOVE 3121			 PAG. XXX			
CUBE SPOT 2 MOVE 3136			 PAG. XXX			
CUBE SPOT SQ MOVE 3134			 PAG. XXX			
CUBE SPOT SQ 2 MOVE 3135			 PAG. XXX			
CUBE SPOT 3120			 PAG. XXX			
CUBE SPOT 2 3131			 PAG. XXX			

ORACLE	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
ORACLE 20087	 PAG. XXX	 PAG. XXX			 PAG. XXX	

VISUAL INDEX

OKKO	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
OKKO 410012			 PAG. XXX			

OKKO	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
OVALI 410013			 PAG. XXX			

LENT	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
LENT MODULAR 10216			 PAG. XXX	 PAG. XXX		
LENT MOTION 10212			 PAG. XXX			

SASSY	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
SASSY 410002			 new PAG. XXX	 new PAG. XXX		
SASSY SQ 410003			 new PAG. XXX	 new PAG. XXX		

SU	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
SU 3149			 IP65 PAG. XXX			
SU SQ 3150			 IP65 PAG. XXX			
SU OTIS 3234			 IP65 PAG. XXX			

VISUAL INDEX

BASIT	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
VIO 20185			new  PAG. XXX			
VIO DEEP 20186			new  PAG. XXX			
VIO DOME 20183			new  PAG. XXX			
VIO SQ 20181			new  PAG. XXX			
VIO MOVE 20184			new  PAG. XXX			
VIO DEEP MOVE 20187			new  PAG. XXX			
VIO DOME MOVE 20182			new  PAG. XXX			
VIO SQ MOVE 20180			new  PAG. XXX			

CAN REVIEW	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
CAN REVIEW 20149			 PAG. XXX			

VADI	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
VADI 3177			 PAG. XXX			

ROY	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
ROY 20154			 PAG. XXX			

VISUAL INDEX

FACE	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
FACE TUBULAR 20205	new  PAG. XXX					
FACE TUBULAR SPAC 20207	new  PAG. XXX					
FACE TUBULAR MOVE 20205		new  PAG. XXX	new  PAG. XXX			
FACE KIERA 20204	new  PAG. XXX					
FACE KIERA CEMENT 20208	new  PAG. XXX					
FACE IRIS 20203	new  PAG. XXX					

SUBLIM	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
SUBLIM 20206	new  PAG. XXX					

GALANTA	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
GALANTA DEEP 410001			new  PAG. XXX			
GALANTA BONETE 20222	new  PAG. XXX					

VENICE	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
VENISE 410011	new  PAG. XXX					

VISUAL INDEX

CATLI	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
CATLI 3010		 PAG. XXX	 PAG. XXX			
CATLI SQ 3011		 PAG. XXX	 PAG. XXX			
CATLI SQ2 3012			 PAG. XXX			
CATLI SQ3 3013			 PAG. XXX			
CATLI HALKA 3017			 PAG. XXX			
CATLI HALKA SQ 3021			 PAG. XXX			
CATLI ODALKI 3018			 PAG. XXX			
CATLI CLASSIC 3005			 IP65 PAG. XXX			
CATLI CLASSIC SQ 3006			 IP65 PAG. XXX			
CATLI CARE 3000			 PAG. XXX			
CATLI CARE 2 3001			 PAG. XXX			

VISUAL INDEX

ALDAIA	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
ALDAIA 20120			 PAG. XXX			
ALDAIA SQ 20157			 PAG. XXX			

PATRICIA TK	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
PATRICIA TK 30514					 new PAG. XXX	

BASIT	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
BASIT 8012			 PAG. XXX			
BASIT MOVE 8013			 PAG. XXX			
BASIT MONET 20130			 PAG. XXX			
BASIT MONET 2 20131			 PAG. XXX			
BASIT LLORENS 20140			 PAG. XXX			
BASIT LLORENS SQ 20144			 PAG. XXX			
BASIT DERIN 8010			 PAG. XXX			

VISUAL INDEX

KONI	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
KONI 3161			 PAG. XXX			
KONI SQ 3169			new  PAG. XXX			
KONI DEEP 3171			new  PAG. XXX			
KONI TURTA 3156			 PAG. XXX			

CASTEJON	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
CASTEJON 20173			 PAG. XXX			
CASTEJON SQ 20174			 PAG. XXX			

VISUAL INDEX

WALL LIGHTS

ACOUSTIC	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	WALL RECESSED | .WR	WALL SURFACE | .WS
GLIM 410004						new  PAG. XXX
KUU 410014						new  PAG. XXX
ELENA 8106						PAG. XXX
OKUMA 8105						 PAG. XXX
IKI 9011						 PAG. XXX
KAPI 9000						 PAG. XXX
HURY 10251						 PAG. XXX
ADIMA 8104						 PAG. XXX
ADIMA SQ 8103						 PAG. XXX
MAGRIT 20127						 PAG. XXX
KLEE 20128						PAG. XXX
KLEE SQ 20129						PAG. XXX

STRUCTURAL WHITE

ZENIT	PENDANT	.PN	SURFACE	.SR	RECESSED FRAME	.RF	TRIMLESS	.TR	WALL RECESSED	.WR	WALL SURFACE	.WS
ZENIT 10123							 PAG. XXX			
ZENIT SQ 30002							 PAG. XXX			
ZENIT DEEP 30004							PAG. XXX			
ZENIT DEEP TWINS 30005							PAG. XXX			
ZENIT MOVE 10125							 PAG. XXX			
ZENIT MOVE SQ 30003							 PAG. XXX			
ZENIT ORTO 10126							 PAG. XXX			
ZENIT SIDEREA 10050							 PAG. XXX			
ZENIT MOVE 10122							PAG. XXX			
ZENIT MOVE SQ 10121							PAG. XXX			

CENTAURO	PENDANT	.PN	SURFACE	.SR	RECESSED FRAME	.RF	TRIMLESS	.TR	WALL RECESSED	.WR	WALL SURFACE	.WS
CENTAURO 10109							 PAG. XXX			

VEGA	PENDANT	.PN	SURFACE	.SR	RECESSED FRAME	.RF	TRIMLESS	.TR	WALL RECESSED	.WR	WALL SURFACE	.WS
VEGA ADHARA 10016							PAG. XXX			
VEGA ADHARA TWINS 10066							 PAG. XXX			
VEGA 10028							 PAG. XXX			
VEGA TWINS 10070							 PAG. XXX			
VEGA ZETA 10001							 PAG. XXX			
VEGA ZETA SQ 10019							 PAG. XXX			
ZETA SQ TWINS 10072							 PAG. XXX			

DRACO	PENDANT	.PN	SURFACE	.SR	RECESSED FRAME	.RF	TRIMLESS	.TR	WALL RECESSED	.WR	WALL SURFACE	.WS
DRACO 10119									 PAG. XXX	
DRACO TUCANA 10008									PAG. XXX	
DRACO ZAHARA 10009									PAG. XXX	
DRACO ORION 10011									PAG. XXX	

STRUCTURAL WHITE

ORBIT	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	WALL RECESSED| .WR	WALL SURFACE | .WS
ORBIT 10091					PAG. XXX	
ORBIT SQ 10090					PAG. XXX	
ORBIT NADIR 10113					PAG. XXX	
ORBIT NADIR SQ 10114					PAG. XXX	
ORBIT ARA 10006					PAG. XXX	
LYRA 10560					PAG. XXX	
TYRA 10561					PAG. XXX	
MYRA 10564					PAG. XXX	

VITA	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	WALL RECESSED| .WR	WALL SURFACE | .WS
VITA 30007				 new PAG. XXX		

WALL	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	WALL RECESSED| .WR	WALL SURFACE | .WS
WALL METIS 10098						PAG. XXX
WALL ELARA 10097						 PAG. XXX
WALL TEBE 10096						PAG. XXX
WALL LEDA 10051						PAG. XXX
WALL ARCE 10055						 PAG. XXX
WALL CARPO 10059						 PAG. XXX
OUTDOOR						
WALL ZEN OUT 11600						 new PAG. XXX
WALL ZEN SQ OUT 11601						 new PAG. XXX
WALL ARA OUT 10006						 new PAG. XXX
WALL ZAHARA OUT 10009						 new PAG. XXX
WALL DRACO OUT 10119						 new PAG. XXX
NOCTUA OUT 10119						 new PAG. XXX

VISUAL INDEX STRUCTURAL WHITE

NOCTUA	PENDANT | **.PN**	SURFACE | **.SR**	RECESSED FRAME | **.RF**	TRIMLESS | **.TR**	WALL RECESSED| **.WR**	WALL SURFACE | **.WS**
NOCTUA 10103		 PAG. XXX				
NOCTUA SQ 10099		 PAG. XXX				
NOCTUA DEEP 10100		 PAG. XXX				
NOCTUA VENUS 10102		 PAG. XXX				

MENORCA	PENDANT | **.PN**	SURFACE | **.SR**	RECESSED FRAME | **.RF**	TRIMLESS | **.TR**	TRACK | **.TK**	WALL SURFACE | **.WS**
IBIZA FLAT 10500				 PAG. XXX		
IBIZA DEEP WAVE 10501				 PAG. XXX		
IBIZA DEEP TILT 10502				 PAG. XXX		
IBIZA EDGE 10503				 PAG. XXX		
IBIZA WASHER 10504				 PAG. XXX		
IBIZA DEEP STRAIGHT 10505				 PAG. XXX		

MENORCA	PENDANT | **.PN**	SURFACE | **.SR**	RECESSED FRAME | **.RF**	TRIMLESS | **.TR**	TRACK | **.TK**	WALL SURFACE | **.WS**
MENORCA FLAT 10550				 PAG. XXX		
MENORCA DEEP WAVE 10551				 PAG. XXX		
MENORCA DEEP TILT 10552				 PAG. XXX		
MENORCA EDGE 10553				 PAG. XXX		
MENORCA WASHER 10554				 PAG. XXX		
MENORCA DEEP STRAIGHT 10555				 PAG. XXX		

SUNSET	PENDANT | **.PN**	SURFACE | **.SR**	RECESSED FRAME | **.RF**	TRIMLESS | **.TR**	WALL RECESSED| **.WR**	WALL SURFACE | **.WS**
SUNSET 10124				 PAG. XXX		

VOLCANO	PENDANT | **.PN**	SURFACE | **.SR**	RECESSED FRAME | **.RF**	TRIMLESS | **.TR**	WALL RECESSED| **.WR**	WALL SURFACE | **.WS**
VOLCANO 10062				PAG. XXX		
VOLCANO DEEP 10063				PAG. XXX		

VISUAL INDEX

STRUCTURAL WHITE

ESPIGA	PENDANT	**.PN**	SURFACE	**.SR**	RECESSED FRAME	**.RF**	TRIMLESS	**.TR**	TRACK	**.TK**	WALL SURFACE	**.WS**
ESPIGA 10086							 PAG. XXX					
ESPIGA SQ 10083							 PAG. XXX					
ESPIGA SIRIO 10077							PAG. XXX					
ESPIGA SIRIO TWINS 30000							PAG. XXX					
ESPIGA ORIONIS 10080							 PAG. XXX					
ESPIGA ORIONIS TWINS 30001							 PAG. XXX					



INSTALLATION VISUAL INDEX

PENDANT SURFACE | pag XX to XX

SURFACE | pag XX to XX

PENDANT | pag XX to XX

RECESSED WITH FRAME | pag XX to XX

TRIMLESS | pag XX to XX

TRACKLIGHT | pag XX to XX

WALL SURFACE | pag XX to XX

WALL RECESSED | pag XX to XX

PENDANT

ALABAMA



ALABAMA
10158 PAG. XXX



ALABAMA SLIGHT
10192 PAG. XXX



ALABAMA SLIM
310002 PAG. XXX



ALABAMA SUPER SLIM
310001 PAG. XXX



ALABAMA SUPER SLIM TILT
310007 PAG. XXX



ALABAMA SLIGHT SQ
10194 PAG. XXX

OHIO



OHIO
10188 PAG. XXX

ALTAIR



ALTAIR
10172 PAG. XXX

ALBERTA



ALBERTA
10176 PAG. XXX



ALBERTA SLIGHT
10193 PAG. XXX



ALBERTA SOFT
10217 PAG. XXX



ALBERTA DUE
10250 PAG. XXX



ALBERTA DUE MOVE
310004 PAG. XXX



ALBERTA INSIDE
10243 PAG. XXX



ALBERTA SLIGHT ECCENTRIC
310005 PAG. XXX



ALBERTA INSIDE VERTICAL
310008 PAG. XXX



ALBERTA INSIDE V-TILT
310009 PAG. XXX

FLORIDA




FLORIDA
10190 PAG. XXX



FLORIDA SQ
10191 PAG. XXX

BUBBLE



BUBBLE
210010 PAG. XXX

ALBA



ALBA PLUS
10178 PAG. XXX



ALBA
10160 PAG. XXX




ALBA MINI
10211 PAG. XXX



ALBA DOUBLE
10215 PAG. XXX



ALBA PLUS ASIMETRIC
210008 PAG. XXX



ALBA ASIMETRIC
210009 PAG. XXX



ALBA NOVUS
210011 PAG. XXX

BOLD



BOLD
210001 PAG. XXX




BOLD LINE
210015 PAG. XXX



TRIBOLD
210018 PAG. XXX

OKKIA



OKKIA
210007 PAG. XXX

VISUAL INDEX

LINGGO



LINGGO
210002 PAG. XXX



LINGGO MINI
210003 PAG. XXX

OKKO MODULAR



OKKO MODULAR
10254 PAG. XXX



OKKO MODULAR LINE
210012 PAG. XXX

OVALI



OVALI
10252 PAG. XXX



OVALI LINE
210013 PAG. XXX

ALARIK



ALARIK
10225 PAG. XXX



ALAARIK SLIM
20224 PAG. XXX



ALAARIK SLIM ROUND
210019 PAG. XXX



ALARIK MINI
210006 PAG. XXX



ALARIK MINI ROUND
210004 PAG. XXX

MODULIGHT



MODULIGHT
10210 PAG. XXX

MARTORELL



MARTORELL
20115 PAG. XXX

MARTORELL TUBULAR 40
20192 PAG. XXX

MARTORELL TUBULAR 60
20196 PAG. XXX

CUBE



CUBE TUBE
9050-9052 PAG. XXX



CUBE TUBE MOVE
9051-9053 PAG. XXX

FACE



FACE TUBULAR
20205 PAG. XXX



FACE TUBULAR SPAC
20207 PAG. XXX



FACE KIERA
20204 PAG. XXX



FACE KIERA CEMENT
20208 PAG. XXX



FACE IRIS
20203 PAG. XXX

SUBLIM

SUBLIM
20206 PAG. XXX

GUS



GUS
210017 PAG. XXX

WING



WING
10200 PAG. XXX

ALZIRA



ALZIRA
10169 PAG. XXX

EYE



EYE
210016 PAG. XXX

ORACLE



ORACLE
20087 PAG. XXX

GALANTA

GALANTA BONETE
20222 PAG. XXX

PENDANT

VENISE



VENISE

410011 PAG. XXX

ACOUSTIC



AC. LAMBDA

230001 PAG. XXX



AC. LINGGO MINI

230007 PAG. XXX



AC. ALBA MINI

230008 PAG. XXX




AC. ALARIK

230009 PAG. XXX



AC. OKKO

230003 PAG. XXX



AC. ALBERTA SOFT

230010 PAG. XXX



AC. ALZIRA

230002 PAG. XXX




AC. ALBA

230004 PAG. XXX




AC. ALABAMA

460001|3 PAG. XXX




AC. KLIMT

460002|4 PAG. XXX



AC. ACCESORIES

RD|SQ|VT|FL PAG. XXX

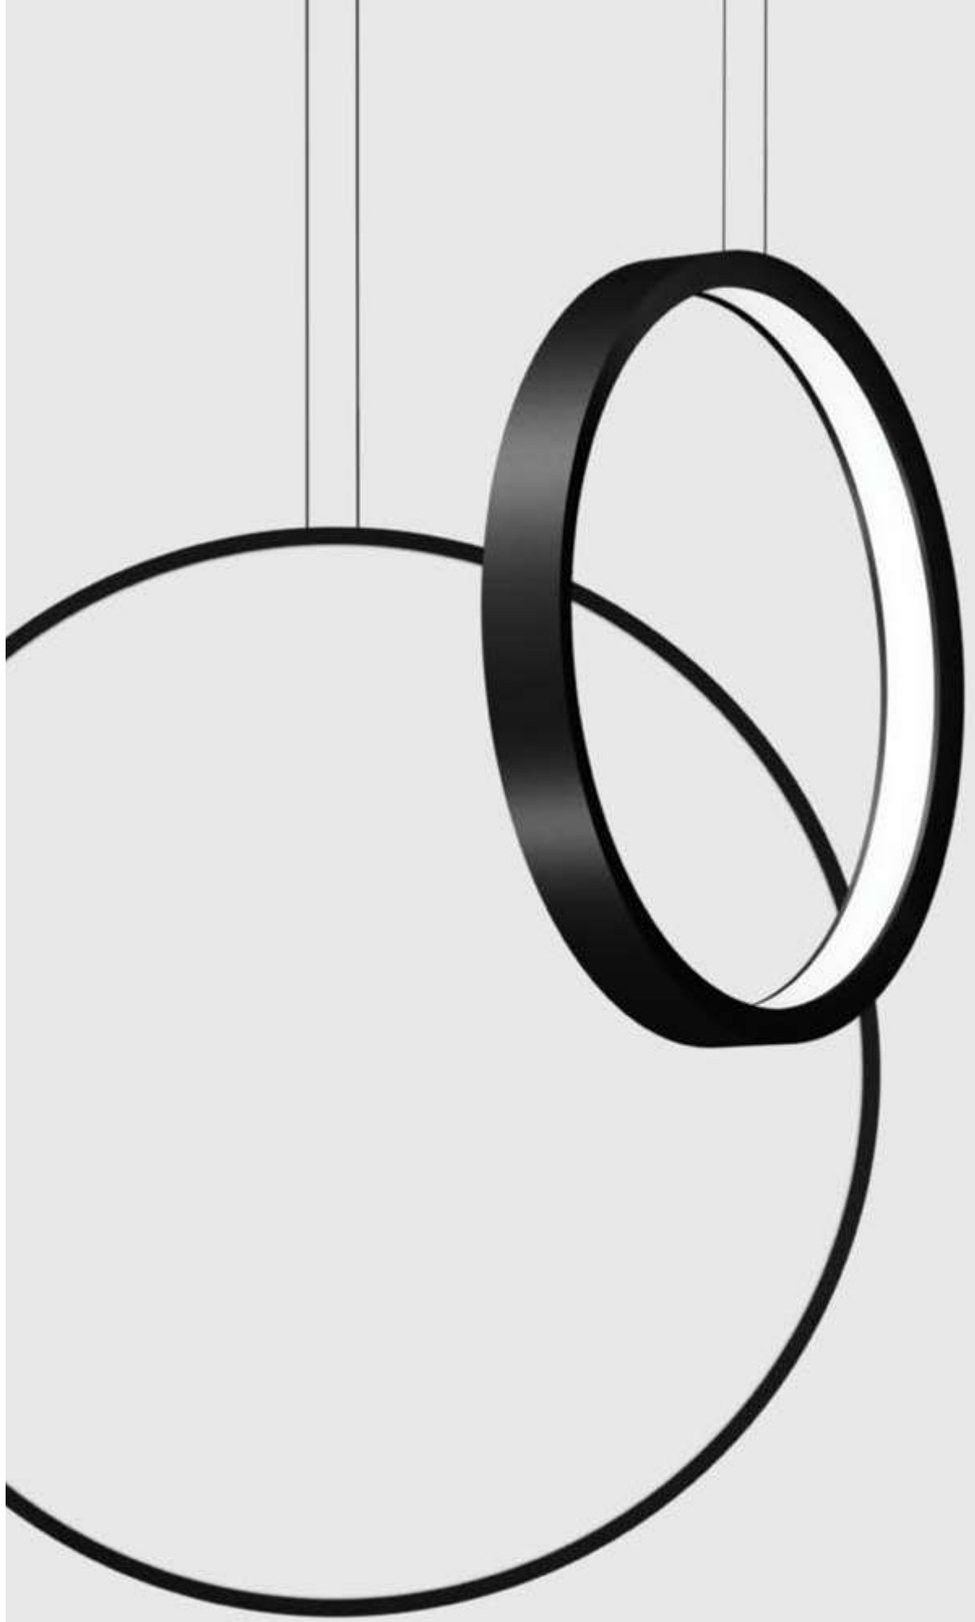

SURFACE

ALABAMA


ALABAMA
10158 PAG. XXX


ALABAMA SLIGHT
10192 PAG. XXX


new
ALABAMA SLIM
310002 PAG. XXX


new
ALABAMA SUPER SLIM
310001 PAG. XXX


ALABAMA SLIGHT SQ
10194 PAG. XXX

OHIO


new
OHIO
10188 PAG. XXX

ALTAIR


ALTAIR
10172 PAG. XXX

ALBERTA


ALBERTA SLIGHT
10193 PAG. XXX


ALBERTA SOFT
10217 PAG. XXX


new
ALBERTA INSIDE
10243 PAG. XXX


new
ALBERTA SLIGHT ECCENTRIC
310005 PAG. XXX

FLORIDA


FLORIDA
10190 PAG. XXX


FLORIDA SQ
10191 PAG. XXX

BUBBLE


BUBBLE
210010 PAG. XXX

ALBA


ALBA PLUS
10178 PAG. XXX


ALBA
10160 PAG. XXX


ALBA MINI
10211 PAG. XXX


new
ALBA PLUS ASIMETRIC
210008 PAG. XXX


new
ALBA ASIMETRIC
210009 PAG. XXX

BOLD


new
BOLD
210001 PAG. XXX


new
BOLD LINE
210015 PAG. XXX


new
TRIBOLD
210018 PAG. XXX

OKKIA


new
OKKIA
210007 PAG. XXX

LINGGO


new
LINGGO
210002 PAG. XXX


new
LINGGO MINI
210003 PAG. XXX

WING


WING
10200 PAG. XXX

OKKO MODULAR


new
OKKO MODULAR
10254 PAG. XXX


new
OKKO MODULAR LINE
210012 PAG. XXX

OVALI MODULAR


new
OVALI MODULAR
10252 PAG. XXX


new
OVALI MODULAR LINE
210013 PAG. XXX

VISUAL INDEX

ALARIK


ALARIK
10225 PAG. XXX


new
ALAARIK SLIM
20224 PAG. XXX


new
ALAARIK SLIM ROUND
210019 PAG. XXX


new
ALARIK MINI
210006 PAG. XXX

MODULIGHT


MODULIGHT
10210 PAG. XXX

EYE


new
EYE
210016 PAG. XXX

MARTORELL


MARTORELL
20115 PAG. XXX


MARTORELL MOVE
20110 PAG. XXX


MARTORELL TUBE MOVE
20138 PAG. XXX


MARTORELL SQ
20132 PAG. XXX


MARTORELL SQ2
20133 PAG. XXX

MARTORELL TUBULAR 40
20192 PAG. XXX

MARTORELL TUBULAR 60
20196 PAG. XXX


MARTORELL TUBULAR TILT
20195 PAG. XXX


MARTORELL CRATE
20176 PAG. XXX


MARTORELL MINI CRATE
20175 PAG. XXX

CATLI


CATLI
3010 PAG. XXX


CATLI SQ
3011 PAG. XXX

KLIMT


KLIMT
20134 PAG. XXX


new
KLIMT FIX
20135 PAG. XXX

GEO


new
GEO
30511 PAG. XXX

LUK


LUK FREIR
20018 PAG. XXX


LUK FREIR 2
20019 PAG. XXX


LUK CRUSADER
20082 PAG. XXX


LUK HAWKEYE
20083 PAG. XXX


LUK HAWKEYE 2
20084 PAG. XXX

CUBE

CUBE
8201 PAG. XXX


CUBE SQ2
8202 PAG. XXX


CUBE SQ3
3012 PAG. XXX


CUBE TUBE
9050-9052 PAG. XXX


CUBE TUBE MOVE
9051-9053 PAG. XXX

ORACLE


ORACLE
20087 PAG. XXX

FACE


FACE TUBULAR MOVE
20205 PAG. XXX

SURFACE

NOCTUA



NOCTUA

10103 PAG. XXX



NOCTUA SQ

10099 PAG. XXX



NOCTUA DEEP

10100 PAG. XXX



NOCTUA VENUS

10102 PAG. XXX

NOCTUA OUT



NOCTUA OUT

10119.OUT PAG. XXX

ACOUSTIC



AC. LAMBDA

230001 PAG. XXX



AC. ALBA

230004 PAG. XXX



ACOUSTIC ACCESORIES

RD|SQ|VT|FL PAG. XXX





FINISHES

● COLORS

DIMENSIONS

⬟ DIAMETERS mm. | HEIGHT 114 mm

350 | 450 | 650 | 950 | 1250

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD | HIGH

CRI

90

COLOR TEMPERATURES

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN | UP-DOWN

LUMINAIRE INCLUDES

.PN
3 x Suspension cables 3m
NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
DIM DOWN or NON-DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm²
DIM DOWN-UP (only): 1 x Feed Hose 5 x 0,75mm²
Connection box CB03 with luminaire's finish
.SR
Surface mounting kit





ON DEMAND

Special RAL Color
Special Color Temperature
Number of switches
Emergency Lighting*
CRI 80
Motion Detection
RGB
Wireless Control Options (Casambi)


* Delivered separately
(not installed in luminaire).

INSTALLATIONS



ALABAMA

REF 10158.PN | 10158.SR

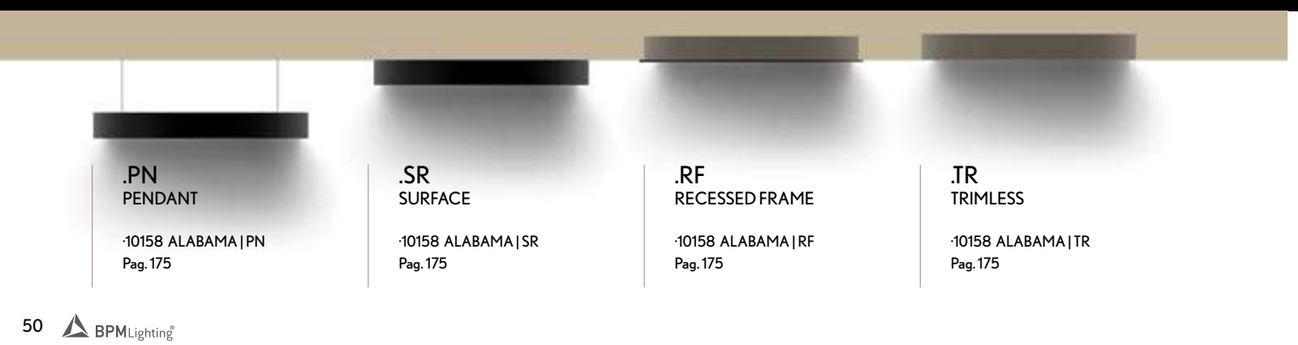

.PN
PENDANT

·10158 ALABAMA | PN
Pag. 175

.SR
SURFACE


·10158 ALABAMA | SR
Pag. 175

.RF
RECESSED FRAME

·10158 ALABAMA | RF
Pag. 175

.TR
TRIMLESS

·10158 ALABAMA | TR
Pag. 175





ALABAMA	REF.	DIMEN-SION ⬟	FIN-ISH	DIFFUS-ER ■	POW-ER	CRI	K	DOWNLIGHT LUMEN	DOWNLIGHT WATT	DOWNLIGHT mA	UPLIGHT ▲.UP *2 *3 LUMEN	UPLIGHT ▲.UP *2 *3 WATT	DIMM ▼	SKETCH
	10158	.35	●	.OP .MP	.ST	.9	.27	-	18	500	-	7	.DA .PU .D1	 114 Ø350
							.30	2385			474			
							.40	2475			603			
						.8	TW *1	-	-	-	-	-	-	
					.HI	.9	.27	-	35	500	-	15	.DA .PU .D1	
							.30	4767			1016			
							.40	4956			1291			
	10158	.45	●	.OP .MP	.ST	.9	.27	4590	35	500	605	9	.DA .PU .D1	 114 Ø450
							.30	4770			627			
							.40	4950			797			
						.8	TW *1	11400 - 11820	76	700	-	-	.DA	
					.HI	.9	.27	9180	71	500	1298	19	.DA .PU .D1	
							.30	9534			1343			
							.40	9912			1708			
	10158	.65	●	.OP .MP	.ST	.9	.27	9180	71	500	901	13	.DA .PU .D1	 114 Ø650
							.30	9540			933			
							.40	9900			1186			
						.8	TW *1	22800-23640	152	700	-	-	.DA	
					.HI	.9	.27	18360	142	500	1932	29	.DA .PU .D1	
							.30	19068			1999			
							.40	19824			2541			
	10158	.95	●	.OP .MP	.ST	.9	.27	16830	130	500	1344	20	.DA .PU .D1	 114 Ø950
							.30	17490			1392			
							.40	18150			1770			
						.8	TW *1	41800-43340	279	700	-	-	.DA	
					.HI	.9	.27	33660	260	500	2882	43	.DA .PU .D1	
							.30	34958			2982			
							.40	36344			3791			
	10158	.125	●	.OP .MP	.ST	.9	.27	27540	212	500	1787	27	.DA .PU .D1	 114 Ø1250
							.30	28620			1851			
							.40	29700			2353			
						.8	TW *1	68400-70920	457	700	-	-	.DA	
					.HI	.9	.27	55080	425	500	3832	57	.DA .PU .D1	
							.30	57204			3965			
							.40	59472			5041			

Reference order | 10158.XX ⬟ | .SR / .PN | .XX.XX ● ■ .XX.X .XX ▼ .XX.XX ▲

● Select finishes



.WH-WH .BK-BK .GC-GC .BM-BM .BS-BS .BC-BC .CR-CR .CB-CB .GY-GY .MG-MG .VC-VC .YM-YM

*1 Tunable White (.TW) values correspond to 2700K and 6500K - TW is only available for DALI dimmable (.DA), CRI 80 (.8) 700mA. *Los valores del blanco dinámico (.TW) corresponden a 2700K y 6500K. -.TW solo está disponible con protocolo DALI (.DA), CRI 80 (.8) 700mA.*




*2 Uplight (.UP) is only available for ON-OFF and DALI dimmable (.DA) options, both in 24VdC. *La luz indirecta está solo disponible para versiones on-off y regulación DALI (.DA), ambas en 24VdC.*

*3 Uplight (.UP) Tunable White (.TW) is defaulted with remote control. When requested with DALI protocol (.DA), consult with the sales team. *La luz indirecta (.UP) en blanco dinámico (.TW) viene predeterminada con mando a distancia. Si se pide con protocolo DALI (.DA), consultar con el equipo comercial.*


OPTIONS (.PN)

CABLE CONCENTRATOR	CONNECTION BOX	REF.	FINISH
	 40 Ø102	CB10	●
	 25.5 Ø150	CB02	
	 46.5 Ø310	CB05	


Reference order | CBXX.XX ●

CABLE CONCENTRATOR KIT	CONNECTION BOX	REF.	FOR MODEL	FINISH
	 Ø85 + CB010	SC21	.35	●
	 Ø125 + CB02	SC22	.45 .65	
	 Ø215 + CB05	SC23	.95 .125	

Reference order | SCXX.XX ●

SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA

CENTRAL ROD SUSPENSION*	CONNECTION BOX	REF.	DIMENSIONS ⬟	FINISH
	 + 40 Ø100	SC20	.60 600mm	●
			.80 800mm	
			.100 1000mm	

Luminaire .95 and .125 require 3 rod suspensions.
Luminarias .95 y .125 requieren 3 tijas.


Reference order | SC20.XX.XX ⬟ ●



ALABAMA


REF 10158.PN | 10158.SR

PHOTOMETRY



OPAL MICROPRISMATIC

INCLUDED (.PN)



CB03 CONNECTION BOX

SC03.SA WIRE 3M.

PROFILE





FINISHES

● COLORS

DIMENSIONS

⬟ DIAMETERS mm. | HEIGHT 80 mm

350 | 450 | 650 | 950 | 1250

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD

CRI

90

COLOR TEMPERATURES

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN | UP-DOWN

LUMINAIRE INCLUDES

.PN
3 x Suspension cables 3m
NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
DIM DOWN or NON-DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm²
DIM DOWN-UP (only): Cabling 1 circuit, 1 x Feed Hose 5 x 0,75mm²
Connection box CB03 with luminaire's finish
.SR
Surface mounting kit






ON DEMAND

Special RAL Color
Number of switches
Emergency Lighting*
Motion Detection
Wireless Control Options (Casambi)

* Delivered separately
(not installed in luminaire).

INSTALLATIONS



ALABAMA
SLIGHT

REF 10192.PN | 10192.SR




.PN
PENDANT

·10192 ALABAMA SLIGHT | PN
Pag. 175





.SR
SURFACE

·10192 ALABAMA | SR
Pag. 175






ALABAMA SLIGHT	REF.	DIMEN-SION ⬟	FINISH	DIFFUS-ER ■	POWER	CRI	K	DOWNLIGHT LUMEN	DOWNLIGHT WATT	DOWNLIGHT mA	UPLIGHT ▲.UP *1 LUMEN	UPLIGHT ▲.UP *1 WATT	DIMM ▼	SKETCH
	**10192**	**.35**	●	**.OP .MP**	**.ST**	**.9**	**.27**	2706	27	700	458	7	**.DA .PU .D1**	 80 Ø350
							.30	2940			474			
							.40	3000			603			
	**10192**	**.45**	●	**.OP .MP**	**.ST**	**.9**	**.27**	4510	45	700	605	9	**.DA .PU .D1**	 80 Ø450
							.30	4900			627			
							.40	5000			797			
	**10192**	**.65**	●	**.OP .MP**	**.ST**	**.9**	**.27**	10824	109	700	901	13	**.DA .PU .D1**	 80 Ø650
							.30	11760			933			
							.40	12000			1186			
	**10192**	**.95**	●	**.OP .MP**	**.ST**	**.9**	**.27**	19844	200	700	1344	20	**.DA .PU .D1**	 80 Ø950
							.30	21560			1392			
							.40	22000			1770			
	**10192**	**.125**	●	**.OP .MP**	**.ST**	**.9**	**.27**	31570	318	700	1787	27	**.DA .PU .D1**	 80 Ø1250
							.30	34300			1851			
							.40	35000			2353			

Reference order | 10192.XX | .SR .PN | .XX.XX.ST.9.XX.XX.XX

*1 Uplight (.UP) is only available for ON-OFF and DALI dimmable (.DA) options, both in 24VdC. *La luz indirecta está solo disponible para versiones on-off y regulación DALI (.DA), ambas en 24VdC.*


OPTIONS (.PN)

CABLE CONCENTRATOR	CONNECTION BOX	REF.	FINISH
	 40 Ø102	**CB10**	●
	 25.5 Ø150	**CB02**	
	 46.5 Ø310	**CB05**	


Reference order | CBXX.XX

CABLE CONCENTRATOR KIT	CONNECTION BOX	REF.	FOR MODEL	FINISH
	 Ø85 + CB010	**SC21**	.35	●
	 Ø125 + CB02	**SC22**	.45 .65	
	 Ø215 + CB05	**SC23**	.95 .125	

Reference order | SCXX.XX

SUSPENSION KIT	REF.	DIMENSION	FINISH
	**SC05**	**5M.**	**.SA**
	SC07	**7M.**	
	SC10	**10M.**	

Reference order | SCXX.SA

CENTRAL ROD SUSPENSION*	CONNECTION BOX	REF.	DIMENSIONS ⬟	FINISH
	 40 Ø100	**SC20**	**.60** 600mm	●
			.80 800mm	
			.100 1000mm	

Luminaire .95 and .125 require 3 rod suspensions.
Luminarias .95 y .125 requieren 3 tijas.

Reference order | SC20.XX.XX

● Select finishes






ALABAMA SLIGHT


REF 10192.PN | 10192.SR

SUSPENSION OPTIONS (.PN)

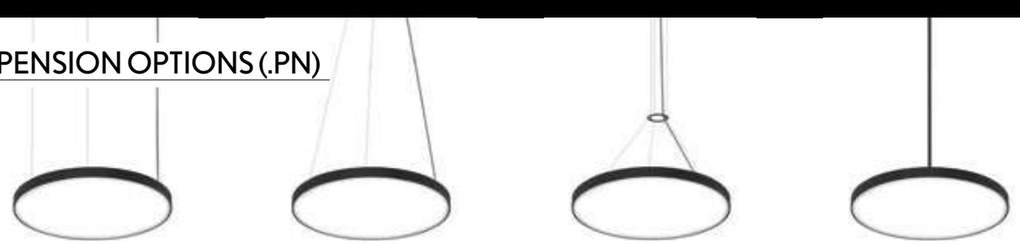


DEFAULT | CABLE CONCENTRATOR | CABLE CONCENTRATOR KIT | CENTRAL ROD SUSPENSION

PHOTOMETRY




OPAL | MICROPRISMATIC

INCLUDED (.PN)



CB03 CONNECTION BOX | SC03.SA WIRE 3M.

PROFILE





FINISHES

● COLORS

DIMENSIONS

⬟ SIZES mm. | HEIGHT 80 mm

350 | 450 | 650 | 950 | 1250

300 x 650 | 300 x 950 | 300 x 1250

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD

CRI

90

COLOR TEMPERATURES

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN | UP-DOWN

LUMINAIRE INCLUDES

.PN
4 x Suspension cables 3m
NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
DIM DOWN or NON-DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm²
DIM DOWN-UP (only): 1 x Feed Hose 5 x 0,75mm²
Connection box CB09.12 with luminaire's finish
.SR
Surface mounting kit





ON DEMAND

Special RAL Color
Special Color Temperature
Number of switches
Emergency Lighting*
Motion Detection
Wireless Control Options (Casambi)

* Delivered separately
(not installed in luminaire).

.SR
.PN
PENDANT | SURFACE

INSTALLATIONS



ALABAMA
SLIGHT SQ

REF 10194.PN | 10194.SR






.PN
PENDANT






·10194 ALABAMA SLIGHT SQ | PN
Pag. 175

.SR
SURFACE

·10194 ALABAMA SLIGHT SQ | SR
Pag. 175





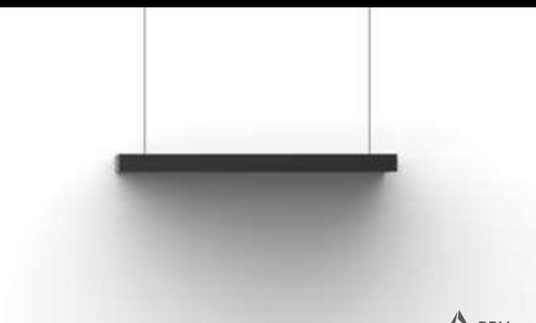

ALABAMA SLIGHT SQ	REF.	DIMEN-SION ⬟	FINISH	DIFFUS-ER ■	POWER	CRI	K	DOWNLIGHT LUMEN	DOWNLIGHT WATT	DOWNLIGHT mA	UPLIGHT ▲.UP *1 LUMEN	UPLIGHT ▲.UP *1 WATT	DIMM ▼	SKETCH
	**10194**	**.35**	●	**.OP .MP**	**.ST**	**.9**	**.27**	2706	27	700	470	7	**.DA .PU .D1**	
							.30	2940			487			
							.40	3000			619			
	**10194**	**.45**	●	**.OP .MP**	**.ST**	**.9**	**.27**	5412	55	700	658	10	**.DA .PU .D1**	
							.30	5880			682			
							.40	6000			867			
	**10194**	**.65**	●	**.OP .MP**	**.ST**	**.9**	**.27**	10824	109	700	1034	15	**.DA .PU .D1**	
							.30	11760			1071			
							.40	12000			1362			
	**10194**	**.95**	●	**.OP .MP**	**.ST**	**.9**	**.27**	21648	218	700	1598	24	**.DA .PU .D1**	
							.30	23520			1656			
							.40	24000			2105			
	**10194**	**.125**	●	**.OP .MP**	**.ST**	**.9**	**.27**	36080	364	700	2162	32	**.DA .PU .D1**	
							.30	39200			2240			
							.40	40000			2847			


Reference order | 10194.XX | .SR .PN | .XX.XX.ST9.XX.XX.XX

*1 Uplight (.UP) is only available for ON-OFF and DALI dimmable (.DA) options, both in 24VdC. *La luz indirecta está solo disponible para versiones on-off y regulación DALI (.DA), ambas en 24VdC.*

ALABAMA SLIGHT SQ	REF.	DIMEN-SION ⬟	FINISH	DIFFUS-ER ■	POWER	CRI	K	DOWNLIGHT LUMEN	DOWNLIGHT WATT	DOWNLIGHT mA	UPLIGHT ▲.UP* LUMEN	UPLIGHT ▲.UP* WATT	DIMM ▼	SKETCH
	**10194**	**.30-65**	●	**.OP .MP**	**.ST**	**.9**	**.27**	3608	36	700	705	11	**.DA .PU .D1**	
							.30	3920			731			
							.40	4000			929			
	**10194**	**.30-95**	●	**.OP .MP**	**.ST**	**.9**	**.27**	5412	55	700	987	15	**.DA .PU .D1**	
							.30	5880			1023			
							.40	6000			1300			
	**10194**	**.30-125**	●	**.OP .MP**	**.ST**	**.9**	**.27**	7216	73	700	1269	19	**.DA .PU .D1**	
							.30	7840			1315			
							.40	8000			1671			

Reference order | 10194.XX.PN.XX.XX.XX.X.XX.XX.XX

OPTIONS (.PN)

CENTRAL ROD SUSPENSION	CONNECTION BOX	REF.	DIMENSIONS ⬟	FINISH
		**SC21**	**.60** 600mm	●
			.80 800mm	
			.100 1000mm	

Luminaire .95 and .125 require 2 rod suspensions.
Luminarias .95 y .125 requieren 2 tijas.

Reference order **SC21.XX.XX**

*1 Uplight (.UP) is only available for ON-OFF and DALI dimmable (.DA) options, both in 24VdC. *La luz indirecta está solo disponible para versiones on-off y regulación DALI (.DA), ambas en 24VdC.*

● Select finishes






ALABAMA
SLIGHT SQ

REF 10194.PN | 10194.SR


SUSPENSION OPTIONS (.PN)

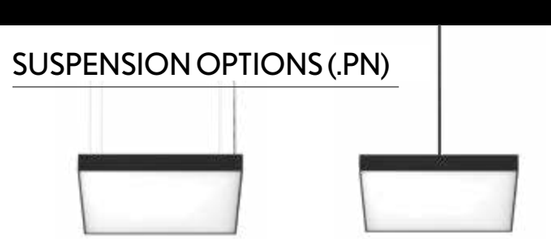

DEFAULT

CENTRAL ROD SUSPENSION


PHOTOMETRY



OPAL

MICROPRISMATIC


INCLUDED (.PN)



CB09.12
CONNECTION BOX

SC03.SA
WIRE 3M.

PROFILE





new

FINISHES

● COLORS

DIMENSIONS

⬟ DIAMETERS mm. | HEIGHT 53 mm

250 | 350 | 450 | 650 | 950 | 1250

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD

CRI

90

COLOR TEMPERATURES

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN | UP-DOWN



LUMINAIRE INCLUDES

.PN
3 x Suspension cables 3m
NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
NON-DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm² (Ø350 / Ø450 - 2 x Feed Hose 3 x 0,75mm²)
DIM DOWN: 1 x Feed Hose 5 x 0,75mm² (Ø250 - 1 x Feed Hose 3 x 0,75mm²)
DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm² (Ø350 / Ø450 - 1 x Feed Hose 3 x 0,75mm²)
Connection box CB03 with luminaire's finish
.SR
Surface mounting kit

ON DEMAND

Special RAL Color
Number of switches
Emergency Lighting*
Motion Detection
Wireless Control Options (Casambi)

* Delivered separately
(not installed in luminaire).

.SR
.PN
PENDANT | SURFACE

INSTALLATIONS




.PN
PENDANT

·310002 ALABAMA SLIM | PN
Pag. 175




.SR
SURFACE


·310002 ALABAMA SLIM | SR
Pag. 175



ALABAMA
SLIM

REF 310002.PN | 310002.SR






ALABAMA SLIM	REF.	DIMEN-SION ⬟	FINISH	DIFFUS-ER ■	POWER	CRI	K	DOWNLIGHT LUMEN	DOWNLIGHT WATT	DOWNLIGHT mA	UPLIGHT ▲.UP *1 LUMEN	UPLIGHT ▲.UP *1 WATT	DIMM ▼	SKETCH
	**310002**	**.25** *2	●	**.OP .MP**	**.ST**	**.9**	**.27**	1385	13	250	310	5	**.DA .PU .D1**	 53 Ø250
							.30	1400			321			
							.40	1425			408			
	310002	**.35**	●	**.OP .MP**	**.ST**	**.9**	**.27**	2350	26	250	458	7	**.DA .PU .D1**	 53 Ø350
							.30	2392			474			
							.40	2697			603			
	**310002**	**.45**	●	**.OP .MP**	**.ST**	**.9**	**.27**	4700	40	250	605	10	**.DA .PU .D1**	 53 Ø450
							.30	4784			627			
							.40	5394			797			
	**310002**	**.65**	●	**.OP .MP**	**.ST**	**.9**	**.27**	10572	72	250	901	13	**.DA .PU .D1**	 53 Ø650
							.30	10704			933			
							.40	12484			1186			
	**310002**	**.95**	●	**.OP .MP**	**.ST**	**.9**	**.27**	21598	153	250	1344	20	**.DA .PU .D1**	 53 Ø950
							.30	21976			1392			
							.40	25816			1770			
	**310002**	**.125**	●	**.OP .MP**	**.ST**	**.9**	**.27**	36308	252	250	1787	27	**.DA .PU .D1**	 53 Ø1250
							.30	36848			1851			
							.40	43124			2353			

Reference order | 310002.XX | .SR .PN | .XX.XX.ST.9.XX.XX.XX

*1 Uplight (.UP) is only available for ON-OFF and DALI dimmable (.DA) options, both in 24VdC. *La luz indirecta está solo disponible para versiones on-off y regulación DALI (.DA), ambas en 24VdC.*
*2 Remote Driver. *Driver en remoto.*
*3 Remote Driver for uplight. *Driver en remoto para luz indirecta.*


OPTIONS (.PN)

CABLE CONCENTRATOR	CONNECTION BOX	REF.	FINISH
	 40 Ø102	**CB10**	●
	 25.5 Ø150	**CB02**	
	 46.5 Ø310	**CB05**	


Reference order | CBXX.XX

CABLE CONCENTRATOR KIT	CONNECTION BOX	REF.	FOR MODEL	FINISH
	 +  Ø85 CB010	**SC21**	.25 .35	●
	 +  Ø125 CB02	**SC22**	.45 .65	
	 +  Ø215 CB05	**SC23**	.95 .125	

Reference order | SCXX.XX

SUSPENSION KIT	REF.	DIMENSION	FINISH
	**SC05**	**5M.**	**.SA**
	SC07	**7M.**	
	SC10	**10M.**	


Reference order | SCXX.SA

CENTRAL ROD SUSPENSION*	CONNECTION BOX	REF.	DIMENSIONS ⬟	FINISH
	 + 40 Ø100	**SC20**	**.60** 600mm	●
			.80 800mm	
			.100 1000mm	

Luminaire .95 and .125 require 3 rod suspensions.
Luminarias .95 y .125 requieren 3 tijas.

Reference order | SC20.XX.XX

● Select finishes





ALABAMA SLIM


REF 310002.PN | 310002.SR

SUSPENSION OPTIONS (.PN)




DEFAULT | CABLE CONCENTRATOR | CABLE CONCENTRATOR KIT | CENTRAL ROD SUSPENSION

PHOTOMETRY



OPAL | MICROPRISMATIC


INCLUDED (.PN)



CB03 CONNECTION BOX

SC03.SA WIRE 3M.

PROFILE



ALABAMA SUPER SLIM

new

A bright idea for any room

The ultimate aim: to focus, not distract. Hence the simplicity of the Alabama family. Square or round, whose minimalism conceals an enormous potential to create unique environments.

Alabama luminaries feature extruded aluminium profiles and opal or microprismatic diffusers to provide even light. The result is enveloping, optimal background lighting with scope to play with the intensity of light.

Ambientes con luz propia

La finalidad última: convertir el espacio iluminado en protagonista. De ahí la simplicidad de los modelos que conforman la familia Alabama. Cuadrados o redondos, con relativa sencillez en sus acabados pero con un enorme potencial de crear atmósferas únicas.

Los modelos Alabama se presentan en perfilería de aluminio extruido y difusores opales o micro prismáticos para garantizar una iluminación uniforme y homogénea. Se consigue por ello un ambiente general de iluminación óptima, envolvente, que nos permite jugar con la intensidad de la luz.



new

FINISHES

● COLORS

DIMENSIONS

⬟ DIAMETERS mm. | HEIGHT 38 mm

250 | 350 | 450 | 650 | 950 | 1250

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD

CRI

90

COLOR TEMPERATURES

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN | UP-DOWN





LUMINAIRE INCLUDES

.PN
3 x Suspension cables 3m
NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
NON-DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm² (Ø350 / Ø450 - 2 x Feed Hose 3 x 0,75mm²)
DIM DOWN: 1 x Feed Hose 5 x 0,75mm² (Ø250 - 1 x Feed Hose 3 x 0,75mm²)
DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm² (Ø350 / Ø450 - 1 x Feed Hose 3 x 0,75mm²)
Connection box CB03 with luminaire's finish
.SR
Surface mounting kit

ON DEMAND

Special RAL Color
Number of switches
Emergency Lighting*
Motion Detection
Wireless Control Options (Casambi)

* Delivered separately
(not installed in luminaire).

.SR
.PN
PENDANT | SURFACE

INSTALLATIONS



ALABAMA
SUPER SLIM

REF 310001.PN | 310001.SR






.PN
PENDANT

·310001 ALABAMA SUPER SLIM
| PN Pag. 175

.SR
SURFACE

·310001 ALABAMA SUPER SLIM
| SR Pag. 175






ALABAMA SUPER SLIM	REF.	DIMEN-SION ⬟	FINISH	DIFFUS-ER ■	POWER	CRI	K	DOWNLIGHT LUMEN	DOWNLIGHT WATT	DOWNLIGHT mA	UPLIGHT ▲.UP *1 LUMEN	UPLIGHT ▲.UP *1 WATT	DIMM ▼	SKETCH
	**310001**	**.25** *2	●	**.OP .MP**	**.ST**	**.9**	**.27**	1385	13	250	310	5	**.DA .PU .D1**	 38 Ø250
							.30	1400			321			
							.40	1425			408			
	310001	**.35**	●	**.OP .MP**	**.ST**	**.9**	**.27**	2350	26	250	458	7	**.DA .PU .D1**	 38 Ø350
							.30	2392			474			
							.40	2697			603			
	**310001**	**.45**	●	**.OP .MP**	**.ST**	**.9**	**.27**	4700	40	250	605	10	**.DA .PU .D1**	 38 Ø450
							.30	4784			627			
							.40	5394			797			
	**310001**	**.65**	●	**.OP .MP**	**.ST**	**.9**	**.27**	10572	72	250	901	13	**.DA .PU .D1**	 38 Ø650
							.30	10704			933			
							.40	12484			1186			
	**310001**	**.95**	●	**.OP .MP**	**.ST**	**.9**	**.27**	21598	153	250	1344	20	**.DA .PU .D1**	 38 Ø950
							.30	21976			1392			
							.40	25816			1770			
	**310001**	**.125**	●	**.OP .MP**	**.ST**	**.9**	**.27**	36308	252	250	1787	27	**.DA .PU .D1**	 38 Ø1250
							.30	36848			1851			
							.40	43124			2353			



Reference order | 310001.XX | .SR .PN | .XX.XX.ST.9.XX.XX.XX

*1 Uplight (.UP) is only available for ON-OFF and DALI dimmable (.DA) options, both in 24VdC. *La luz indirecta está solo disponible para versiones on-off y regulación DALI (.DA), ambas en 24VdC.*
*2 Remote Driver. *Driver en remoto.*


OPTIONS (.PN)

CABLE CONCENTRATOR	CONNECTION BOX	REF.	FINISH
	 40 Ø102	**CB10**	●
	 25.5 Ø150	**CB02**	
	 46.5 Ø310	**CB05**	


Reference order | CBXX.XX

CABLE CONCENTRATOR KIT	CONNECTION BOX	REF.	FOR MODEL	FINISH
	 Ø85 + CB010	**SC21**	.25 .35	●
	 Ø125 + CB02	**SC22**	.45 .65	
	 Ø215 + CB05	**SC23**	.95 .125	

Reference order | SCXX.XX

SUSPENSION KIT	REF.	DIMENSION	FINISH
	**SC05**	**5M.**	**.SA**
	SC07	**7M.**	
	SC10	**10M.**	


Reference order | SCXX.SA

CENTRAL ROD SUSPENSION*	CONNECTION BOX	REF.	DIMENSIONS ⬟	FINISH
	 + 40 Ø100	**SC20**	**.60** 600mm	●
			.80 800mm	
			.100 1000mm	

Luminaire .95 and .125 require 3 rod suspensions.
Luminarias .95 y .125 requieren 3 tijas.

Reference order | SC20.XX.XX

● Select finishes





ALABAMA
SUPER SLIM


REF 310001.PN | 310001.SR

SUSPENSION OPTIONS (.PN)




DEFAULT | CABLE CONCENTRATOR | CABLE CONCENTRATOR KIT | CENTRAL ROD SUSPENSION

PHOTOMETRY



OPAL | MICROPRISMATIC


INCLUDED (.PN)



CB03 CONNECTION BOX

SC03.SA WIRE 3M.

PROFILE





FINISHES

● COLORS

DIMENSIONS

⬟ DIAMETERS mm. | HEIGHT 38 mm

350 | 450 | 650

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD

CRI

90

COLOR TEMPERATURES

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN

LUMINAIRE INCLUDES

Movable component for fastening to the ceiling.

new



ON DEMAND

Special RAL Color
Number of switches
Emergency Lighting*
Motion Detection
Wireless Control Options (Casambi)

* Delivered separately
(not installed in luminaire).

INSTALLATIONS




ALABAMA
SUPER SLIM TILT

REF310007 .PN





.PN
PENDANT

·310007 ALABAMA SUPER SLIM TILT
| PN - Pag. 175





ALABAMA SUPER SLIM TILT	REF.	DIMEN-SION ⬟	FINISH	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM OP. ▼	SKETCH
	**310007**	**.35**	●	**.OP .MP**	**.ST**	**.9**	**.27**	2350	26	250	**.DA .PU .D1**	
							.30	2392				
							.40	2697				
	**310007**	**.45**	●	**.OP .MP**	**.ST**	**.9**	**.27**	4700	40	250	**.DA .PU .D1**	
							.30	4784				
							.40	5394				
	**310007**	**.65**	●	**.OP .MP**	**.ST**	**.9**	**.27**	10572	72	250	**.DA .PU .D1**	
							.30	10704				
							.40	12484				

Reference order | ⬟ ● ■ ▼

310007.XX .PN.XX.XX.ST.9.XX.XX



PENDANT

.PN

● Select finishes






ALABAMA
SUPER SLIM TILT

REF 310007.PN

PHOTOMETRY




OPAL MICROPRISMATIC

INCLUDED



XXXX

PROFILE





FINISHES

● COLORS

DIMENSIONS

⬟ DIAMETERS mm. | HEIGHT 53 mm

250 | 350 | 450 | 650 | 950 | 1250

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD

CRI

90

COLOR TEMPERATURES

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN | UP-DOWN

LUMINAIRE INCLUDES

.PN
3 x Suspension cables 3m
NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
NON-DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm² (Ø350 / Ø450 - 2 x Feed Hose 3 x 0,75mm²)
DIM DOWN: 1 x Feed Hose 5 x 0,75mm² (Ø250 - 1 x Feed Hose 3 x 0,75mm²)
DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm² (Ø350 / Ø450 - 1 x Feed Hose 3 x 0,75mm²)
Connection box CB03 with luminaire's finish
.SR
Surface mounting kit

ON DEMAND

Special Color Temperature
Number of switches
Emergency Lighting*
Motion Detection
Wireless Control Options (Casambi)

* Delivered separately
(not installed in luminaire).

new





.SR

.PN


PENDANT | SURFACE

INSTALLATIONS

ALUMINIUM PC | 0° | 0° | CRI ≥90 | IK06 | IP20 IP40 | LIFE 50000H | DIM OPTIONAL | INTEGRATED | INDOOR | 220-240 V 50-60 Hz | CE

OHIO

REF 10188.PN | 10188.SR

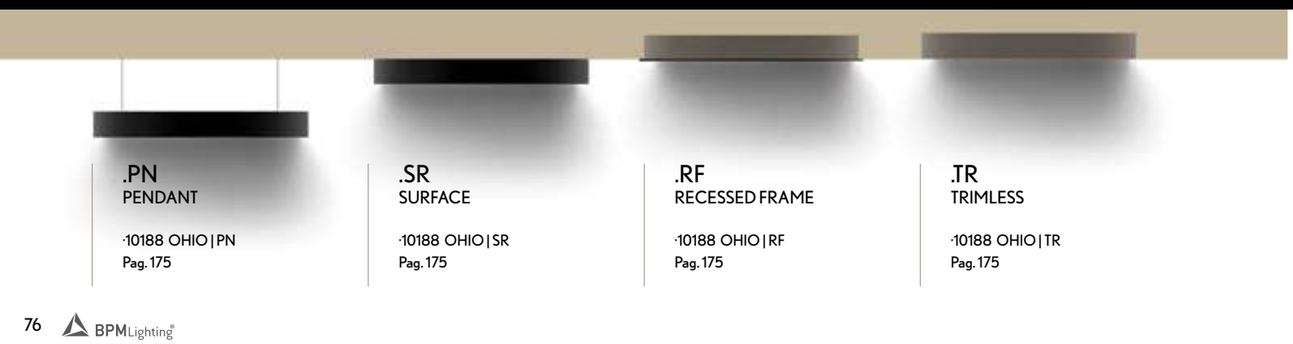

.PN
PENDANT

·10188 OHIO | PN
Pag. 175

.SR
SURFACE


·10188 OHIO | SR
Pag. 175

.RF
RECESSED FRAME

·10188 OHIO | RF
Pag. 175

.TR
TRIMLESS

·10188 OHIO | TR
Pag. 175





OHIO	REF.	DIMEN-SION ⬟	FINISH	DIFFUS-ER ■	POWER	CRI	K	DOWNLIGHT LUMEN	DOWNLIGHT WATT	DOWNLIGHT mA	UPLIGHT ▲.UP *1 LUMEN	UPLIGHT ▲.UP *1 WATT	DIMM ▼	SKETCH
	**10188**	**.25** *2	●	**.OP .MP**	**.ST**	**.9**	**.27**	1385	13	250	310	5	**.DA .PU .D1**	 53 Ø250
							.30	1400			321			
							.40	1425			408			
	**10188**	**.35**	●	**.OP .MP**	**.ST**	**.9**	**.27**	2350	26	250	458	7	**.DA .PU .D1**	 53 Ø350
							.30	2392			474			
							.40	2697			603			
	**10188**	**.45**	●	**.OP .MP**	**.ST**	**.9**	**.27**	4700	40	250	605	10	**.DA .PU .D1**	 53 Ø450
							.30	4784			627			
							.40	5394			797			
	**10188**	**.65**	●	**.OP .MP**	**.ST**	**.9**	**.27**	10572	72	250	901	13	**.DA .PU .D1**	 53 Ø650
							.30	10704			933			
							.40	12484			1186			
	**10188**	**.95**	●	**.OP .MP**	**.ST**	**.9**	**.27**	21598	153	250	1344	20	**.DA .PU .D1**	 53 Ø950
							.30	21976			1392			
							.40	25816			1770			
	**10188**	**.125**	●	**.OP .MP**	**.ST**	**.9**	**.27**	36308	252	250	1787	27	**.DA .PU .D1**	 53 Ø1250
							.30	36848			1851			
							.40	43124			2353			

Reference order | 10188.XX | .SR .PN | .XX.XX.ST.9.XX.XX.XX

*1 Uplight (.UP) is only available for ON-OFF and DALI dimmable (.DA) options, both in 24VdC. *La luz indirecta está solo disponible para versiones on-off y regulación DALI (.DA), ambas en 24VdC.*
*2 Remote Driver. *Driver en remoto.*
*3 Remote Driver for uplight. *Driver en remoto para luz indirecta.*


OPTIONS (.PN)

CABLE CONCENTRATOR	CONNECTION BOX	REF.	FINISH
	 40 Ø102	**CB10**	●
	 25.5 Ø150	**CB02**	
	 46.5 Ø310	**CB05**	


Reference order | CBXX.XX

CABLE CONCENTRATOR KIT	CONNECTION BOX	REF.	FOR MODEL	FINISH
	 Ø85 + CB010	**SC21**	.25 .35	●
	 Ø125 + CB02	**SC22**	.45 .65	
	 Ø215 + CB05	**SC23**	.95 .125	

Reference order | SCXX.XX

SUSPENSION KIT	REF.	DIMENSION	FINISH
	**SC05**	**5M.**	**.SA**
	SC07	**7M.**	
	SC10	**10M.**	

Reference order | SCXX.SA

CENTRAL ROD SUSPENSION*	CONNECTION BOX	REF.	DIMENSIONS ⬟	FINISH
	 + 40 Ø100	**SC20**	**.60** 600mm	●
			.80 800mm	
			.100 1000mm	

Reference order | SC20.XX.XX

.SR
.PN
PENDANT | SURFACE

● Select finishes






OHIO


REF 10188.PN | 10188.SR

SUSPENSION OPTIONS (.PN)

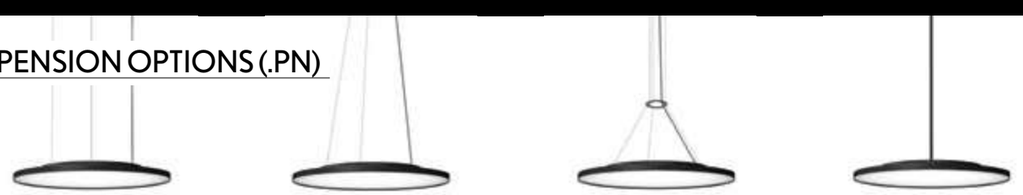

DEFAULT | CABLE CONCENTRATOR | CABLE CONCENTRATOR KIT | CENTRAL ROD SUSPENSION

PHOTOMETRY




OPAL | MICROPRISMATIC

INCLUDED (.PN)

SC03.SA
WIRE 3M.

PROFILE





FINISHES

● EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ DIAMETERS mm. | HEIGHT 114 mm

350 | 450 | 650 | 950 | 1250

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD

CRI

90

COLOR TEMPERATURES

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN | UP-DOWN

LUMINAIRE INCLUDES

.PN
3 x Suspension cables 3m
NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
DIM DOWN or NON-DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm²
DIM DOWN-UP (only): 1 x Feed Hose 5 x 0,75mm²
Connection box CB03 with luminaire's finish
.SR
Surface mounting kit







ON DEMAND

Special RAL Color
Number of switches
Emergency Lighting*
Motion Detection
Wireless Control Options (Casambi)

* Delivered separately
(not installed in luminaire).

INSTALLATIONS



FLORIDA

REF 10190.PN | 10190.SR



.PN
PENDANT

·10190 FLORIDA | PN
Pag. 175

.SR
SURFACE

·10190 FLORIDA | SR
Pag. 175

.RF
RECESSED FRAME





·10190 FLORIDA | RF
Pag. 175

.TR
TRIMLESS

·10190 FLORIDA | TR
Pag. 175






FLORIDA	REF.	DIMEN-SION ⬟	FINISH	DIFFUS-ER ■	POWER	CRI	K	DOWNLIGHT LUMEN	DOWNLIGHT WATT	DOWNLIGHT MA	UPLIGHT ▲.UP *1 LUMEN	UPLIGHT ▲.UP *1 WATT	DIMM ▼	SKETCH
	**10190**	**.35**	●	**.OP .MP**	**.ST**	**.9**	**.27**	2706	27	700	458	7	**.DA .PU .D1**	 114 Ø350
							.30	2940			474			
							.40	3000			603			
	**10190**	**.45**	●	**.OP .MP**	**.ST**	**.9**	**.27**	4510	45	700	605	9	**.DA .PU .D1**	 114 Ø450
							.30	4900			627			
							.40	5000			797			
	**10190**	**.65**	●	**.OP .MP**	**.ST**	**.9**	**.27**	10824	109	700	901	13	**.DA .PU .D1**	 114 Ø650
							.30	11760			933			
							.40	12000			11886			
	**10190**	**.95**	●	**.OP .MP**	**.ST**	**.9**	**.27**	19844	202	700	1344	20	**.DA .PU .D1**	 114 Ø950
							.30	21560			1392			
							.40	22000			1770			
	**10190**	**.125**	●	**.OP .MP**	**.ST**	**.9**	**.27**	31570	318	700	1787	27	**.DA .PU .D1**	 114 Ø1250
							.30	34300			1851			
							.40	35000			2353			


Reference order | 10190.XX | .SR .PN | .XX.XX | ● ■ .ST.9. | .XX | ▼ ▲ .XX.XX

*1 Uplight (UP) is only available for ON-OFF and DALI dimmable (.DA) options, both in 24VdC. *La luz indirecta está solo disponible para versiones on-off y regulación DALI (.DA), ambas en 24VdC.*


OPTIONS (.PN)

CABLE CONCENTRATOR	CONNECTION BOX	REF.	FINISH
	 40 Ø102	**CB10**	●
	 25.5 Ø150	**CB02**	
	 46.5 Ø310	**CB05**	


Reference order | CBXX.XX ●

CABLE CONCENTRATOR KIT	CONNECTION BOX	REF.	FOR MODEL	FINISH
	 Ø85 + CB010	**SC21**	.35	●
	 Ø125 + CB02	**SC22**	.45 .65	
	 Ø215 + CB05	**SC23**	.95 .125	

Reference order | SCXX.XX ●

SUSPENSION KIT	REF.	DIMENSION	FINISH
	**SC05**	**5M.**	**.SA**
	SC07	**7M.**	
	SC10	**10M.**	

Reference order | SCXX.SA

CENTRAL ROD SUSPENSION*	CONNECTION BOX	REF.	DIMENSIONS ⬟	FINISH
	 40 Ø100	**SC20**	**.60** 600mm	●
			.80 800mm	
			.100 1000mm	

* Luminaire .95 and .125 require 3 rod suspensions. *Luminarias .95 y .125 requieren 3 tijas.*

Reference order | SC20.XX.XX ● ●

- Select finishes





FLORIDA


REF 10190.PN | 10190.SR

SUSPENSION OPTIONS (.PN)




DEFAULT | CABLE CONCENTRATOR | CABLE CONCENTRATOR KIT | CENTRAL ROD SUSPENSION

PHOTOMETRY



OPAL | MICROPRISMATIC


INCLUDED (.PN)



CB03 CONNECTION BOX

SC03.SA WIRE 3M.

PROFILE





FINISHES

● EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ SIZES mm. | HEIGHT 114 mm

350 | 450 | 650 | 950 | 1250

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD

CRI

90

COLOR TEMPERATURES

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN | UP-DOWN

LUMINAIRE INCLUDES

.PN
4 x Suspension cables 3m
NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
DIM DOWN or NON-DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm²
DIM DOWN-UP (only): 1 x Feed Hose 5 x 0,75mm²
Connection box CB09.12 with luminaire's finish
.SR
Surface mounting kit





ON DEMAND

Special RAL Color
Number of switches
Emergency Lighting*
Motion Detection
Wireless Control Options (Casambi)

* Delivered separately
(not installed in luminaire).

INSTALLATIONS



FLORIDA
SQ

REF 10191.PN | 10191.SR



.PN
PENDANT

·10191 FLORIDA SQ | PN
Pag. 175

.SR
SURFACE

·10191 FLORIDA SQ | SR
Pag. 175


.RF
RECESSED FRAME




·10191 FLORIDA SQ | RF
Pag. 175

.TR
TRIMLESS

·10191 FLORIDA SQ | TR
Pag. 175





FLORIDA SQ	REF.	DIMEN-SION ⬟	FINISH	DIFFUS-ER ■	POWER	CRI	K	DOWNLIGHT LUMEN	DOWNLIGHT WATT	DOWNLIGHT mA	UPLIGHT ▲.UP *1 LUMEN	UPLIGHT ▲.UP *1 WATT	DIMM ▼	SKETCH
	**10191**	**.35**	●	**.OP .MP**	**.ST**	**.9**	**.27**	2706	27	700	470	7	**.DA .PU .D1**	
							.30	2940			487			
							.40	3000			619			
	**10191**	**.45**	●	**.OP .MP**	**.ST**	**.9**	**.27**	5412	55	700	658	10	**.DA .PU .D1**	
							.30	5880			682			
							.40	6000			867			
	**10191**	**.65**	●	**.OP .MP**	**.ST**	**.9**	**.27**	10824	109	700	1034	15	**.DA .PU .D1**	
							.30	11760			1071			
							.40	12000			1362			
	**10191**	**.95**	●	**.OP .MP**	**.ST**	**.9**	**.27**	21648	218	700	1598	24	**.DA .PU .D1**	
							.30	23520			1656			
							.40	24000			2105			
	**10191**	**.125**	●	**.OP .MP**	**.ST**	**.9**	**.27**	36080	364	700	2162	32	**.DA .PU .D1**	
							.30	39200			2240			
							.40	40000			2847			

Reference order | 10191.XX | .SR .PN | .XX.XX.ST.9.XX.XX.XX



*1 Uplight (.UP) is only available for ON-OFF and DALI dimmable (.DA) options, both in 24VdC. *La luz indirecta está solo disponible para versiones on-off y regulación DALI (.DA), ambas en 24VdC.*

● Select finishes






FLORIDA SQ


REF 10191.PN | 10191.SR

PHOTOMETRY



OPAL MICROPRISMATIC


INCLUDED (.PN)



CB09.12
CONNECTION BOX

SC03.SA
WIRE 3M.

PROFILE





FINISHES

● COLORS

DIMENSIONS

⬟ SIZES mm. | HEIGHT 114 mm

450 | 650 | 950 | 1250

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD | HIGH

CRI

90

COLOR TEMPERATURES

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN | UP-DOWN

LUMINAIRE INCLUDES

.PN
4 x Suspension cables 3m
NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
DIM DOWN or NON-DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm²
DIM DOWN-UP (only): 1 x Feed Hose 5 x 0,75mm²
Connection box CB09.12 with luminaire's finish
.SR
Surface mounting kit





ON DEMAND

Special RAL Color
Special Color Temperature
Number of switches
Emergency Lighting*
CRI 80
Motion Detection
RGB
Wireless Control Options (Casambi)

* Delivered separately
(not installed in luminaire).


.SR
.PN
PENDANT | SURFACE

INSTALLATIONS



ALTAIR

REF 10172.PN | 10172.SR

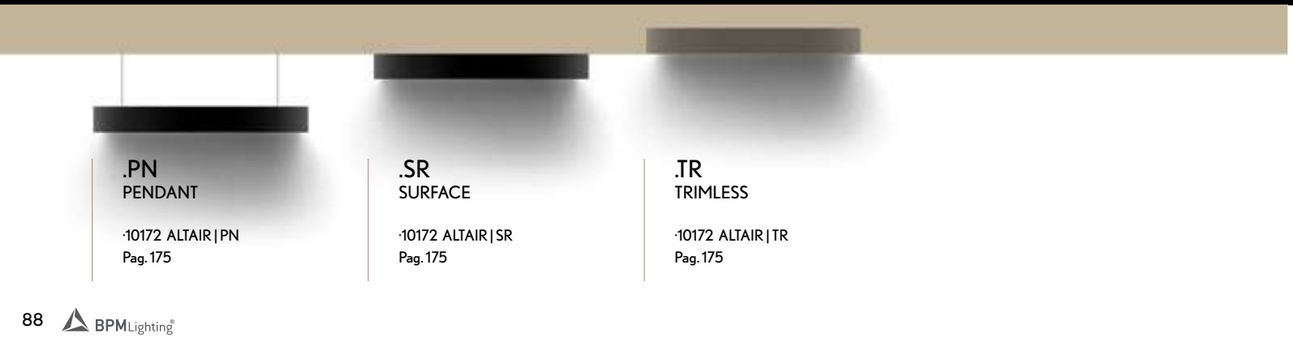

.PN
PENDANT

·10172 ALTAIR | PN
Pag. 175


.SR
SURFACE




·10172 ALTAIR | SR
Pag. 175

.TR
TRIMLESS

·10172 ALTAIR | TR
Pag. 175






ALTAIR	REF.	DIMEN-SIONS ⬟	FINISH	DIFFUS-ER ■	POWER	CRI	K	DOWNLIGHT LUMEN	DOWNLIGHT WATT	DOWNLIGHT mA	UPLIGHT ▲.UP *2 *3 LUMEN	UPLIGHT ▲.UP *2 *3 WATT	DIMM ▼	SKETCH
	**10172**	**.45**	●	**.OP .MP**	**.ST**	**.9**	**.27**	3060	24	500	564	8	**.DA .PU .D1**	
							.30	3180			584			
							.40	3300			743			
						.8	**.TW** *1	7600 - 7880	51	700	-	-	**.DA**	
					.HI	**.9**	**.27**	6120	47	500	1210	18	**.DA .PU .D1**	
							.30	6356			1252			
							.40	6608			1591			
	**10172**	**.65**	●	**.OP .MP**	**.ST**	**.9**	**.27**	6120	47	500	940	14	**.DA .PU .D1**	
							.30	6360			974			
							.40	6600			1238			
						.8	**.TW** *1	15200 - 15760	102	700	-	-	**.DA**	
					.HI	**.9**	**.27**	12240	94	500	2016	30	**.DA .PU .D1**	
							.30	12712			2086			
							.40	13216			2652			
	**10172**	**.95**	●	**.OP .MP**	**.ST**	**.9**	**.27**	11475	89	500	1504	22	**.DA .PU .D1**	
							.30	11925			1558			
							.40	12375			1981			
						.8	**.TW** *1	28500 - 29550	191	700	-	-	**.DA**	
					.HI	**.9**	**.27**	22950	177	500	3226	48	**.DA .PU .D1**	
							.30	23835			3338			
							.40	24780			4243			
	**10172**	**.125**	●	**.OP .MP**	**.ST**	**.9**	**.27**	18360	142	500	2068	31	**.DA .PU .D1**	
							.30	19080			2143			
							.40	19800			2724			
						.8	**.TW** *1	45600 - 47280	**305**	**700**	-	-	**.DA**	
					.HI	**.9**	**.27**	36720	**283**	**500**	4435	66	**.DA .PU .D1**	
							.30	38136			4589			
							.40	39648			5834			

Reference order | 10172.XX ⬟ | .SR .PN | .XX.XX ● ■ .XX.X.XX ▼ ▲ .XX.XX



- Select finishes






ALTAIR


REF 10172.PN | 10172.SR

PHOTOMETRY



OPAL MICROPRISMATIC

INCLUDED (.PN)



CB09.12
CONNECTION BOX

SC03.SA
WIRE 3M.

PROFILE



*1 Tunable White (.TW) values correspond to 2700K and 6500K - .TW is only available for DALI dimmable (.DA), CRI 80 (.8) 700mA. *Los valores del blanco dinámico (.TW) corresponden a 2700K y 6500K. -.TW solo está disponible con protocolo DALI (.DA), CRI 80 (.8) 700mA.*

*2 Uplight (.UP) is only available for ON-OFF and DALI dimmable (.DA) options, both in 24VdC. *La luz indirecta está solo disponible para versiones on-off y regulación DALI (.DA), ambas en 24VdC.*

*3 Uplight (.UP) Tunable White (.TW) is defaulted with remote control. When requested with DALI protocol (.DA), consult with the sales team. *La luz indirecta (.UP) en blanco dinámico (.TW) viene predeterminada con mando a distancia. Si se pide con protocolo DALI (.DA), consultar con el equipo comercial.*



FINISHES

● COLORS

DIMENSIONS

⬟ DIAMETERS mm. | HEIGHT 114 mm

650 | 950 | 1250

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD | HIGH

CRI

90

COLOR TEMPERATURES

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN | UP-DOWN

LUMINAIRE INCLUDES

.PN
3 x Suspension cables 3m
NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
DIM DOWN or NON-DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm²
DIM DOWN-UP (only): 1 x Feed Hose 5 x 0,75mm²
Connection box CB03 with luminaire's finish
.SR
Surface mounting kit



ON DEMAND

Special RAL Color
Special Color Temperature
Number of switches
Emergency Lighting*
CRI 80
Motion Detection
RGB
Wireless Control Options (Casambi)
Other Dimensions

* Delivered separately
(not installed in luminaire).


INSTALLATIONS




ALBERTA

REF 10176.PN







.PN
PENDANT




·10176 ALBERTA | PN
Pag. 175

.RF
RECESSED FRAME

·10176 ALBERTA | RF
Pag. 175


.TR
TRIMLESS

·10176 ALBERTA | TR
Pag. 175

ALBERTA	REF.	DIMEN-SION ⬟	FINISH	DIFFUS-ER ■	POWER	CRI	K	DOWNLIGHT LUMEN	DOWNLIGHT WATT	DOWNLIGHT mA	UPLIGHT ▲.UP *2 *3 LUMEN	UPLIGHT ▲.UP *2 *3 WATT	DIMM OP. ▼	SKETCH
	10176	.65	●	.OP .MP	.ST	.9	.27	3825	30	500	901	13	.DA .PU .D1	
							.30	-			933			
							.40	-			1186			
						.8	.TW *1	9500 - 9850	64	700	-	-	.DA	
					.HI	.9	.27	7650	59	500	1932	29	.DA .PU .D1	
							.30	7945			1999			
							.40	8260			2541			
	10176	.95	●	.OP .MP	.ST	.9	.27	6120	47	500	1347	20	.DA .PU .D1	
							.30	6360			1392			
							.40	6600			1770			
						.8	.TW *1	15200 - 15760	102	700	-	-	.DA	
					.HI	.9	.27	12240	94	500	2882	43	.DA .PU .D1	
							.30	12712			2982			
							.40	13216			3791			
	10176	.125	●	.OP .MP	.ST	.9	.27	9180	71	500	1787	27	.DA .PU .D1	
							.30	9540			1851			
							.40	9900			2353			
						.8	.TW *1	22800-23640	152	700	-	-	.DA	
					.HI	.9	.27	18360	142	500	3832	57	.DA .PU .D1	
							.30	19068			3965			
							.40	19824			5041			

Reference order | 10176.XX ⬟ | .SR .PN | .XX.XX ● .XX ■ .X ▼ .XX ▲ .XX

- Select finishes






*1 Tunable White (.TW) values correspond to 2700K and 6500K - .TW is only available for DALI dimmable (.DA), CRI 80 (.8) 700mA. *Los valores del blanco dinámico (.TW) corresponden a 2700K y 6500K. -.TW solo está disponible con protocolo DALI (.DA), CRI 80 (.8) 700mA.*


*2 Uplight (.UP) is only available for ON-OFF and DALI dimmable (.DA) options, both in 24VdC. *La luz indirecta está solo disponible para versiones on-off y regulación DALI (.DA), ambas en 24VdC.*

*3 Uplight (.UP) Tunable White (.TW) is defaulted with remote control. When requested with DALI protocol (.DA), consult with the sales team. *La luz indirecta (.UP) en blanco dinámico (.TW) viene predeterminada con mando a distancia. Si se pide con protocolo DALI (.DA), consultar con el equipo comercial.*

OPTIONS (.PN)

CABLE CONCENTRATOR	CONNECTION BOX	REF.	FINISH
	 40 Ø102	CB10	●
	 25.5 Ø150	CB02	
	 46.5 Ø310	CB05	

Reference order | CBXX.XX ●


CABLE CONCENTRATOR KIT	CONNECTION BOX	REF.	FOR MODEL	FINISH
	 Ø125 + CB02	SC22	.65	●
	 Ø215 + CB05	SC23	.95 .125	

Reference order | SCXX.XX ●

SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	


Reference order | SCXX.SA

PHOTOMETRY



OPAL MICROPRISMATIC


INCLUDED (.PN)



CB03 CONNECTION BOX

SC03.SA WIRE 3M.

PROFILE



ALBERTA

REF 10176.PN | 10176.SR



ONCE FOUNDATION -ESPACIA, MADRID - SPAIN | PHOTO: PABLO CAULÍN

FINISHES

● COLORS

DIMENSIONS

⬟ DIAMETERS mm. | HEIGHT 80 mm

650 | 950 | 1250 | 1500

2000 | 3000 | 4000 | 5000 | 6000

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD

CRI

90

COLOR TEMPERATURES

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN | UP-DOWN

LUMINAIRE INCLUDES

.PN
3 x Suspension cables 3m
NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
DIM DOWN or NON-DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm²
DIM DOWN-UP (only): 1 x Feed Hose 5 x 0,75mm²
Connection box CB03 with luminaire's finish
.SR
Surface mounting kit





ON DEMAND

Special RAL Color
Special Color Temperature
Number of switches
Emergency Lighting*
Motion Detection
Tunable White
Wireless Control Options (Casambi)
Other Dimensions

* Delivered separately
(not installed in luminaire).

INSTALLATIONS



ALBERTA
SLIGHT

REF 10193.PN | 10193.SR




.PN
PENDANT


·10193 ALBERTA SLIGHT | PN
Pag. 175





.SR
SURFACE

·10193 ALBERTA SLIGHT | SR
Pag. 175





ALBERTA SLIGHT	REF.	DIMEN-SION ⬟	FINISH	DIFFUS-ER ■	POWER	CRI	K	DOWNLIGHT LUMEN	DOWNLIGHT WATT	DOWNLIGHT mA	UPLIGHT ▲UP *1 LUMEN	UPLIGHT ▲UP *1 WATT	DIMM ▼	SKETCH
	**10193**	**.65**	●	**.OP .MP**	**.ST**	**.9**	**.27**	3608	36	700	901	13	**.DA .PU .D1**	
							.30	3920			933			
							.40	4000			1186			
	**10193**	**.95**	●	**.OP .MP**	**.ST**	**.9**	**.27**	7216	73	700	1344	20	**.DA .PU .D1**	
							.30	7840			1392			
							.40	8000			1770			
	**10193**	**.125**	●	**.OP .MP**	**.ST**	**.9**	**.27**	10824	109	700	1787	27	**.DA .PU .D1**	
							.30	11760			1851			
							.40	12000			2353			
	**10193**	**.150**	●	**.OP .MP**	**.ST**	**.9**	**.27**	13530	136	700	2156	32	**.DA .PU .D1**	
							.30	14700			2234			
							.40	15000			2839			
	**10193**	**.200**	●	**.OP .MP**	**.ST**	**.9**	**.27**	18942	191	700	2894	43	**.DA .PU .D1**	
							.30	20580			2999			
							.40	21000			3812			
	**10193**	**.300**	●	**.OP .MP**	**.ST**	**.9**	**.27**	30668	309	700	4371	65	**.DA .PU .D1**	
							.30	33320			4529			
							.40	34000			5756			
	**10193**	**.400**	●	**.OP .MP**	**.ST**	**.9**	**.27**	37884	382	700	5847	87	**.DA .PU .D1**	
							.30	41160			6059			
							.40	42000			7701			
	**10193**	**.500**	●	**.OP .MP**	**.ST**	**.9**	**.27**	46904	473	700	7324	109	**.DA .PU .D1**	
							.30	50960			7589			
							.40	52000			9645			
	**10193**	**.600**	●	**.OP .MP**	**.ST**	**.9**	**.27**	54120	546	700	8800	131	**.DA .PU .D1**	
							.30	58800			9119			
							.40	60000			11590			

Reference order | 10193.XX ⬟ | .SR / .PN | .XX.XX ● ■ .ST9.XX ▼ .XX.XX ▲

● Select finishes





*1 Uplight (.UP) is only available for ON-OFF and DALI dimmable (.DA) options, both in 24VdC. *La luz indirecta está solo disponible para versiones on-off y regulación DALI (.DA), ambas en 24VdC.*


OPTIONS (.PN)

CABLE CONCENTRATOR	CONNECTION BOX	REF.	FINISH
		**CB10**	●
		**CB02**	
		**CB05**	

Reference order | CBXX.XX ●

CABLE CONCENTRATOR KIT	CONNECTION BOX	REF.	FOR MODEL	FINISH
		**SC22**	.65	●
		**SC23**	.95 .125	

Reference order | SCXX.XX ●

SUSPENSION KIT	REF.	DIMENSION	FINISH
	**SC05**	**5M.**	**.SA**
	SC07	**7M.**	
	SC10	**10M.**	


Reference order | SCXX.SA



ALBERTA
SLIGHT


REF 10193.PN | 10193.SR

PHOTOMETRY



OPAL MICROPRISMATIC


INCLUDED (.PN)




CB03 CONNECTION BOX

SC03.SA WIRE 3M.

PROFILE



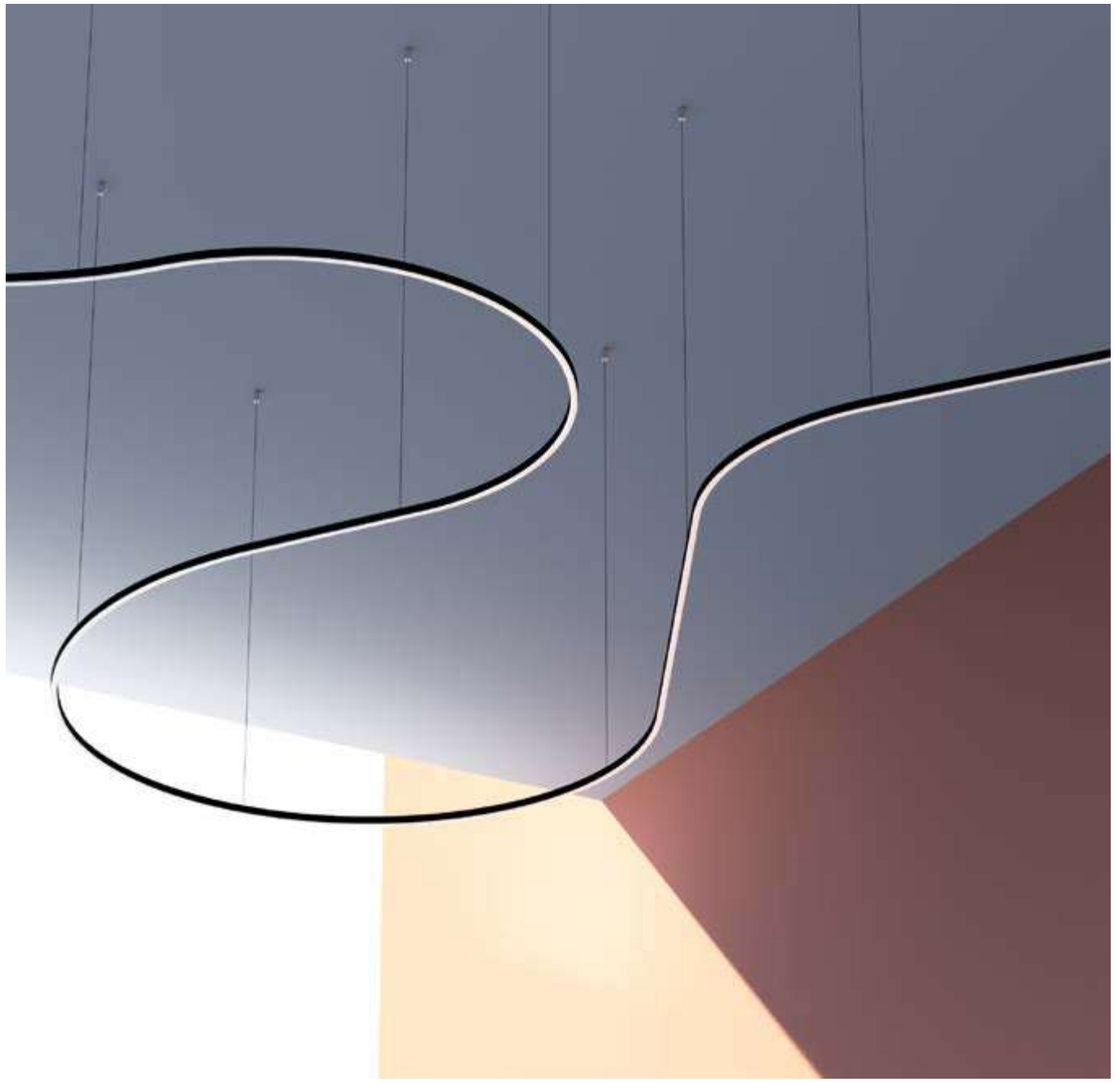

FINISHES

● COLORS

DIMENSIONS

⬟ DIAMETERS mm. | HEIGHT 38 mm

350 | 450 | 650 | 950 | 1250 | 1500

2000 | 2500 | 3000 | 4000 | 5000 | 6000

LIGHTING OPTIONS

■ DIFFUSERS

SILICONE

POWERS

STANDARD

CRI

90

COLOR TEMPERATURES

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN | UP-DOWN

LUMINAIRE INCLUDES

.PN
For feed hoses and suspension details refer to mapping table in page XXX
.SR
Surface mounting kit





REMOTE

ON DEMAND

Special RAL Color
Number of switches
Emergency Lighting*
Motion Detection
Tunable White
RGB
Wireless Control Options (Casambi)

* Delivered separately
(not installed in luminaire).

.SR
.PN
PENDANT | SURFACE

INSTALLATIONS

ALUMINIUM SILICONE | 0° | 0° | CRI ≥90 | IK08
IP20 IP40 | LIFE 50000H | DIM OPTIONAL | | REMOTE
INDOOR | | 220-240 V 50-60 Hz | CE

ALBERTA
SOFT

REF 10217.PN | 10217.SR



.PN
PENDANT

·10217 ALBERTA SOFT | PN
Pag. 175

.SR
SURFACE

· 10217 ALBERTA SOFT | SR
Pag. 175

.RF
RECESSED FRAME

·10217 ALBERTA SOFT | RF
Pag. 175





ALBERTA SOFT	REF.	DIMEN-SION ⬟	FINISH	DIFFUS-ER ■	POWER	CRI	K	DOWNLIGHT LUMEN	DOWNLIGHT WATT	DOWNLIGHT CV	UPLIGHT ▲.UP *1 LUMEN	UPLIGHT ▲.UP *1 WATT	DIMM ▼	SKETCH
	**10217**	**.35**	●	**.SI**	**.ST**	**.9**	**.27**	5280	56	700	458	13	**.DA .PU .D1**	 38 Int. Ø 286 Ext. Ø 350
							.30	5316			474			
							.40	5844			603			
	**10217**	**.45**	●	**.SI**	**.ST**	**.9**	**.27**	7086	70	700	605	16	**.DA .PU .D1**	 38 Int. Ø 386 Ext. Ø 450
							.30	7121			627			
							.40	7747			797			
	**10217**	**.65**	●	**.SI**	**.ST**	**.9**	**.27**	8785	86	700	901	24	**.DA .PU .D1**	 38 Int. Ø 586 Ext. Ø 650
							.30	9040			933			
							.40	9687			1186			
	**10217**	**.95**	●	**.SI**	**.ST**	**.9**	**.27**	13298	129	700	1344	35	**.DA .PU .D1**	 38 Int. Ø 886 Ext. Ø 950
							.30	13519			1392			
							.40	14703			1770			
	**10217**	**.125**	●	**.SI**	**.ST**	**.9**	**.27**	17816	172	700	1787	47	**.DA .PU .D1**	 38 Int. Ø 1186 Ext. Ø 1250
							.30	18135			1851			
							.40	18118			2353			
	**10217**	**.150**	●	**.SI**	**.ST**	**.9**	**.27**	-	185	500	-	56	**.DA .PU .D1**	 38 Int. Ø 1436 Ext. Ø 1500
							.30	25326			12490			
							.40	26901			11010			
	**10217**	**.200**	●	**.SI**	**.ST**	**.9**	**.27**	-	253	500	-	75	**.DA .PU .D1**	 38 Int. Ø 1936 Ext. Ø 2000
							.30	34185			16654			
							.40	35475			14680			

*1 Uplight (.UP) is only available for ON-OFF and DALI dimmable (.DA) options, both in 24VdC. *La luz indirecta está solo disponible para versiones on-off y regulación DALI (.DA), ambas en 24VdC.*

ALBERTA SOFT	REF.	DIMEN-SION ⬟	FINISH	DIFFUS-ER ■	POWER	CRI	K	DOWNLIGHT LUMEN	DOWNLIGHT WATT	DOWNLIGHT CV	UPLIGHT ▲.UP* LUMEN	UPLIGHT ▲.UP* WATT	DIMM ▼	SKETCH
	**10217**	**.250**	●	**.SI**	**.ST**	**.9**	**.27**	-	318	500	-	94	**.DA .PU .D1**	 38 Int. Ø 2436 Ext. Ø 2500
							.30	42930			20814			
							.40	44550			18348			
	**10217**	**.300**	●	**.SI**	**.ST**	**.9**	**.27**	-	383	500	-	113	**.DA .PU .D1**	 38 Int. Ø 2936 Ext. Ø 3000
							.30	51675			24978			
							.40	53625			22018			
	**10217**	**.400**	●	**.SI**	**.ST**	**.9**	**.27**	-	513	500	-	150	**.DA .PU .D1**	 38 Int. Ø 3936 Ext. Ø 4000
							.30	69165			33304			
							.40	71775			29358			
	**10217**	**.500**	●	**.SI**	**.ST**	**.9**	**.27**	-	643	500	-	188	**.DA .PU .D1**	 38 Int. Ø 4936 Ext. Ø 5000
							.30	86655			41628			
							.40	89925			36694			
	**10217**	**.600**	●	**.SI**	**.ST**	**.9**	**.27**	-	772	500	-	226	**.DA .PU .D1**	 38 Int. Ø 5936 Ext. Ø 6000
							.30	104145			49954			
							.40	108075			44034			

*1 Uplight (.UP) is only available for ON-OFF and DALI dimmable (.DA) options, both in 24VdC. *La luz indirecta está solo disponible para versiones on-off y regulación DALI (.DA), ambas en 24VdC.*

Reference order

10217.XX | .SR .PN | .XX.XX.ST9.XX.XX.XX

.SR

.PN

PENDANT | SURFACE

● Select finishes




.WH-WH .BK-BK .GC-GC .BM-BM .BS-BS .BC-BC .CR-CR .CB-CB .GY-GY .MG-MG .VC-VC .YM-YM



ALBERTA SOFT

REF 10217.PN | 10217.SR

SUSPENSION OPTIONS (.PN)

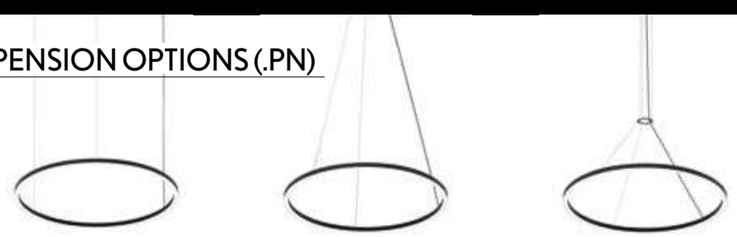

DEFAULT | CABLE CONCENTRATOR | CABLE CONCENTRATOR KIT

PHOTOMETRY




SILICONE

INCLUDED (.PN)

SC03.SA
WIRE 3M.




PROFILE



OPTIONS (.PN) Only for .35.45.65.95.125.150 models

CABLE CONCENTRATOR	CONNECTION BOX	REF.	FINISH
	 Ø102 40	CB10	●
	 Ø150 25.5	CB02	
	 Ø310 46.5	CB05	

Reference order | CBXX.XX

CABLE CONCENTRATOR KIT	CONNECTION BOX	REF.	FOR MODEL	FINISH
	 Ø85 + CB010	SC21	.35	●
	 Ø125 + CB02	SC22	.45 .65	
	 Ø215 + CB05	SC23	.95 .125	

Reference order | SCXX.XX

SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	


Reference order | SCXX.SA



- Select finishes



BOXES (.PN)

CONNECTION BOX AND DRIVER BOX FOR REMOTE DRIVER		DRIVER BOX NON-DIMM		DRIVER BOX DIMMABLE		FINISH
 Ø102 40 40 418		 45 320 30	 Ø66 300	 45 400 30	 Ø66 380	●
CB03	CB04.OP *	CB09.32	CB08.30	CB09.40	CB09.38	

* No finish color, use this reference as it is (CB04.OP).
Sin acabado de color, la referencia es tal cual (CB04.OP)

Reference order | CB09.XX.XX

LUMINAIRE INCLUDES (.PN)

LUMINAIRE´S DIMENSION	FEED HOSES		SUSPENSIONS
	DOWN	DOWN + UP	
.35	1 Feed Hose 3 x 0,75mm²	1 Feed Hose 5 x 0,75mm²	3
.45	1 Feed Hose 3 x 0,75mm²	1 Feed Hose 5 x 0,75mm²	3
.65	1 Feed Hose 3 x 0,75mm²	1 Feed Hose 5 x 0,75mm²	3
.95	1 Feed Hose 3 x 0,75mm²	1 Feed Hose 5 x 0,75mm²	3
.125	1 Feed Hose 5 x 0,75mm²	1 Feed Hose 5 x 0,75mm² 1 Feed Hose 3 x 0,75mm²	3
.150	1 Feed Hose 5 x 0,75mm²	1 Feed Hose 5 x 0,75mm² 1 Feed Hose 3 x 0,75mm²	3
.200	2 Feed Hose 3 x 0,75mm²	2 Feed Hose 5 x 0,75mm²	6
.250	3 Feed Hose 3 x 0,75mm²	3 Feed Hose 5 x 0,75mm²	9
.300	4 Feed Hose 3 x 0,75mm²	4 Feed Hose 5 x 0,75mm²	12
.400	5 Feed Hose 3 x 0,75mm²	5 Feed Hose 5 x 0,75mm²	15
.500	7 Feed Hose 3 x 0,75mm²	7 Feed Hose 5 x 0,75mm²	21
.600	8 Feed Hose 3 x 0,75mm²	8 Feed Hose 5 x 0,75mm²	24



ALBERTA
SOFT

REF 10217.PN | 10217.SR



FINISHES

● COLORS

DIMENSIONS

⬟ DIAMETERS mm. | HEIGHT 50 mm

250 | 350 | 450 | 650 | 950 | 1250

LIGHTING OPTIONS

■ DIFFUSERS

SILICONE

POWERS

STANDARD

CRI

90

COLOR TEMPERATURES

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

INSIDE

LUMINAIRE INCLUDES

.PN
3 x Suspension cables 3m
DIM or NON-DIM: 1 x Feed Hose 3 x 0,75mm²
Connection box CB03 with luminaire's finish
.SR
Surface mounting kit

REMOTE

ON DEMAND

Special RAL Color
Tunable White
RGB
Other Dimensions

new





.SR
.PN
PENDANT | SURFACE

INSTALLATIONS

ALUMINIUM SILICONE · 0° · 0° · CRI ≥90 · IK06 · IP20 IP40 · LIFE 50000H · DIM OPTIONAL · REMOTE · INDOOR · 220-240 V 50-60 Hz · CE

ALBERTA
INSIDE

REF 10243.PN | 10243.SR




.PN
PENDANT

·10243 ALBERTA INSIDE | PN
Pag. 175




.SR
SURFACE

· 10243 ALBERTA INSIDE | SR
Pag. 175





ALBERTA INSIDE	REF.	DIMEN-SION ⬟	FINISH	DIFFUSER OPTIONS ■	POWER	CRI	K	LUMEN MAX.	WATT	VA	DIMM OPT. ▼	SKETCH
	**10243**	**.25**	●	**.SI**	**.ST**	**.9**	**.27**	6098	23	24	**.DA .PU .D1**	 50 Int. Ø 212 Ext. Ø 250
							.30	6315				
							.40	6497				
	**10243**	**.35**	●	**.SI**	**.ST**	**.9**	**.27**	8537	32	24	**.DA .PU .D1**	 50 Int. Ø 312 Ext. Ø 350
							.30	8840				
							.40	9096				
	**10243**	**.45**	●	**.SI**	**.ST**	**.9**	**.27**	10976	41	24	**.DA .PU .D1**	 50 Int. Ø 412 Ext. Ø 450
							.30	11366				
							.40	11694				
	**10243**	**.65**	●	**.SI**	**.ST**	**.9**	**.27**	15854	59	24	**.DA .PU .D1**	 50 Int. Ø 612 Ext. Ø 650
							.30	16418				
							.40	16892				
	**10243**	**.95**	●	**.SI**	**.ST**	**.9**	**.27**	23172	86	24	**.DA .PU .D1**	 50 Int. Ø 912 Ext. Ø 950
							.30	23996				
							.40	24688				
	**10243**	**.125**	●	**.SI**	**.ST**	**.9**	**.27**	30489	113	24	**.DA .PU .D1**	 50 Int. Ø 1212 Ext.Ø 1250
							.30	31573				
							.40	32484				

Reference order | 10243.XX | .SR .PN | .XX.SI.ST.9.XX.XX

OPTIONS (.PN)

CABLE CONCENTRATOR	CONNECTION BOX	REF.	FINISH
	 40 Ø102	**CB10**	●
	 25.5 Ø150	**CB02**	
	 46.5 Ø310	**CB05**	

Reference order | CBXX.XX




CABLE CONCENTRATOR KIT	CONNECTION BOX	REF.	FOR MODEL	FINISH
	 Ø85 +  CB010	**SC21**	.25 .35	●
	 Ø125 +  CB02	**SC22**	.45 .65	
	 Ø215 +  CB05	**SC23**	.95 .125	

Reference order | SCXX.XX

SUSPENSION KIT	REF.	DIMENSION	FINISH
	**SC05**	**5M.**	**.SA**
	SC07	**7M.**	
	SC10	**10M.**	

Reference order | SCXX.SA

BOXES (.PN)

CONNECTION BOX AND DRIVER BOX FOR REMOTE DRIVER		DRIVER BOX NON-DIMM		DRIVER BOX DIMMABLE		FINISH
 40 Ø102 40 418		 300 Ø66	 50 320 80	 380 Ø66	 50 400 80	●
CB03	**CB04.OP ***	**CB08.30**	**CB06.32**	**CB08.38**	**CB06.40**	

* No finish color, use this reference as it is (CB04.OP).
Sin acabado de color, la referencia es tal cual (CB04.OP)

Reference order | CBXX.XX

.SR
.PN
PENDANT | SURFACE

● Select finishes






ALBERTA
INSIDE

REF 10243.PN | 10243.SR

SUSPENSION OPTIONS (.PN)

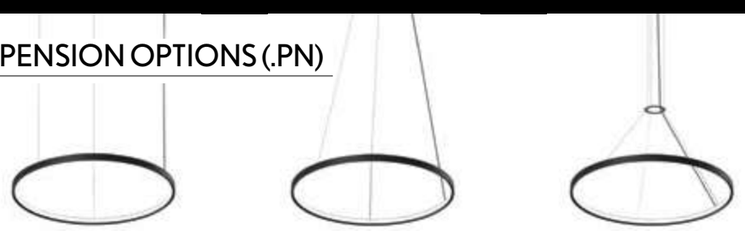


DEFAULT | CABLE CONCENTRATOR | CABLE CONCENTRATOR KIT

PHOTOMETRY




SILICONE

INCLUDED



(.PN) SC03.SA WIRE 3M. | (.SR) INSTALATION KIT

PROFILE





FINISHES

● COLORS

DIMENSIONS

⬟ DIAMETERS mm. | HEIGHT 80 mm

650 | 950 | 1250

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD

CRI

90

COLOR TEMPERATURES

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN | UP-DOWN

LUMINAIRE INCLUDES

.PN
3 x Suspension cables 3m
NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
DIM DOWN or NON-DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm²
DIM DOWN-UP (only): 1 x Feed Hose 5 x 0,75mm²
Connection box CB03 with luminaire's finish
.SR
Surface mounting kit

ON DEMAND

Special RAL Color
Special Color Temperature
Number of switches
Emergency Lighting*
Motion Detection
Wireless Control Options (Casambi)

* Delivered separately
(not installed in luminaire).

new





.SR
.PN
PENDANT | SURFACE

INSTALLATIONS



ALBERTA
SLIGHT ECCENTRIC

REF 310005.PN | 310005.SR





.PN
PENDANT



·310005 ALBERTA SLIGHT ECCENTRIC | PN - Pag. 175

.SR
SURFACE

·310005 ALBERTA SLIGHT ECCENTRIC | SR - Pag. 175






ALBERTA SLIGHT ECCENTRIC	REF.	DIMEN-SION ⬟	FINISH	DIFFUS-ER ■	POWER	CRI	K	DOWNLIGHT LUMEN	DOWNLIGHT WATT	DOWNLIGHT mA	UPLIGHT ▲.UP *1 LUMEN	UPLIGHT ▲.UP *1 WATT	DIMM ▼	SKETCH
	**310005**	**.65**	●	**.OP .MP**	**.ST**	**.9**	**.27**	10373	104	700	901	13	**.DA .PU .D1**	 80 Int. Ø 235 Ext. Ø 650
							.30	11270			933			
							.40	11500			1186			
	**310005**	**.95**	●	**.OP .MP**	**.ST**	**.9**	**.27**	19393	195	700	1344	20	**.DA .PU .D1**	 80 Int. Ø 430 Ext. Ø 950
							.30	21070			1392			
							.40	21500			1770			
	**310005**	**.125**	●	**.OP .MP**	**.ST**	**.9**	**.27**	28864	291	700	1787	27	**.DA .PU .D1**	 80 Int. Ø 730 Ext. Ø 1250
							.30	31360			1851			
							.40	32000			2353			

Reference order | 310005.XX ⬟ | .SR .PN | .XX.XX ● ■ .ST.9.XX ▼ .XX.XX ▲

OPTIONS (.PN)

CABLE CONCENTRATOR	CONNECTION BOX	REF.	FINISH
	 40 Ø102	**CB10**	●
	 25.5 Ø150	**CB02**	
	 46.5 Ø310	**CB05**	

Reference order | CBXX.XX ●

CABLE CONCENTRATOR KIT	CONNECTION BOX	REF.	FOR MODEL	FINISH
	 Ø125 + CB02	**SC22**	.65	●
	 Ø215 + CB05	**SC23**	.95 .125	

Reference order | SCXX.XX ●

SUSPENSION KIT	REF.	DIMENSION	FINISH ●
	**SC05**	**5M.**	**.SA**
	SC07	**7M.**	
	SC10	**10M.**	

Reference order | SCXX.XX ●

***1** Uplight (.UP) is only available for ON-OFF and DALI dimmable (.DA) options, both in 24VdC. *La luz indirecta está solo disponible para versiones on-off y regulación DALI (.DA), ambas en 24VdC.*

● Select finishes






ALBERTA
SLIGHT ECCENTRIC


REF 310005.PN | 310005.SR

SUSPENSION OPTIONS (.PN)

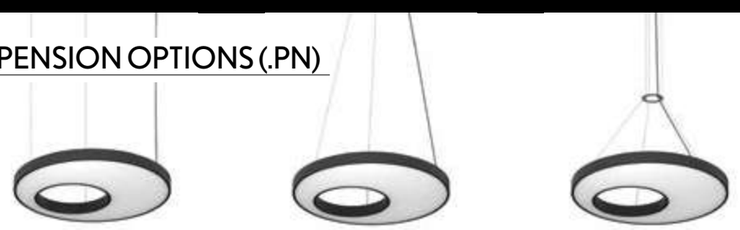


DEFAULT | CABLE CONCENTRATOR | CABLE CONCENTRATOR KIT

PHOTOMETRY



OPAL | MICROPRISMATIC


INCLUDED (.PN)



CB03
CONNECTION BOX

SC03.SA
WIRE 3M.

PROFILE





FINISHES

● COLORS

DIMENSIONS

⬟ DIAMETERS mm. | HEIGHT 30 mm

250 | 350 | 450 | 650 | 950 | 1250

LIGHTING OPTIONS

■ DIFFUSERS

SILICONE

POWERS

STANDARD

CRI

90

COLOR TEMPERATURES

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

INSIDE - OUTSIDE

LUMINAIRE INCLUDES

3 x Suspension cables 3m
DIM or NON-DIM: 1 x Feed Hose 3 x 0,75mm²

new



REMOTE

ON DEMAND

Special RAL Color
Number of switches
Tunable White
RGB

.PN
PENDANT

PENDANT

INSTALLATIONS

ALUMINIUM SILICONE | 0° | 0° | CRI ≥90 | IK06 | IP20 | LIFE 50000H | DIM OPTIONAL | | REMOTE | INDOOR | 220-240 V 50-60 Hz | CE

ALBERTA
DUE

REF 10250.PN









.PN
PENDANT

·10250 ALBERTA DUE | PN
Pag. 175






ALBERTA DUE	REF.	DIMEN-SION ⬟	FINISH	DIFFUSER ■	POWER	CRI	K	LUMEN MAX.	WATT	CV	DIMM OP. ▼	SKETCH
	10250	.25	●	.SI	.ST	.9	.27	2637	24	24V	.DA .PU .D1	 30 Int Ø160 Ext Ø250
							.30	2639				
							.40	2641				
	10250	.35	●	.SI	.ST	.9	.27	3692	33	24V	.DA .PU .D1	 30 Int Ø260 Ext Ø350
							.30	3695				
							.40	3697				
	10250	.45	●	.SI	.ST	.9	.27	4747	42	24V	.DA .PU .D1	 30 Int Ø360 Ext Ø450
							.30	4750				
							.40	4753				
	10250	.65	●	.SI	.ST	.9	.27	6857	61	24V	.DA .PU .D1	 30 Int Ø560 Ext Ø650
							.30	6861				
							.40	6856				
	10250	.95	●	.SI	.ST	.9	.27	10022	90	24V	.DA .PU .D1	 30 Int Ø860 Ext Ø950
							.30	10028				
							.40	10034				
	10250	.125	●	.SI	.ST	.9	.27	131187	118	24V	.DA .PU .D1	 30 Int Ø1160 Ext Ø1250
							.30	13195				
							.40	13203				

Reference order | 10250.XX .PN.XX.SI.ST.9.XX.XX

OPTIONS

CABLE CONCENTRATOR	CONNECTION BOX	REF.	FINISH
	 40 Ø102	CB10	●
	 25.5 Ø150	CB02	
	 46.5 Ø310	CB05	

Reference order | CBXX.XX ●





CABLE CONCENTRATOR KIT	CONNECTION BOX	REF.	FOR MODEL	FINISH
	 Ø85 + CB010	SC21	.25 .35	●
	 Ø125 + CB02	SC22	.45 .65	
	 Ø215 + CB05	SC23	.95 .125	

Reference order | SCXX.XX ●

SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA

BOXES

CONNECTION BOX AND DRIVER BOX FOR REMOTE DRIVER		DRIVER BOX NON-DIMM		DRIVER BOX DIMMABLE		FINISH
 40 Ø102	 40 418	 300 Ø66	 50 320 80	 380 Ø66	 50 400 80	●
CB03	CB04.OP *	CB08.30	CB06.32	CB08.38	CB06.40	


* No finish color, use this reference as it is (CB04.OP).
Sin acabado de color, la referencia es tal cual (CB04.OP)

Reference order | CBXX.XX ●

.PN

PENDANT

● Select finishes





ALBERTA DUE

REF 10250.PN

SUSPENSION OPTIONS



DEFAULT | CABLE CONCENTRATOR | CABLE CONCENTRATOR KIT

PHOTOMETRY




SILICONE

INCLUDED

SC03.SA
WIRE 3M.

PROFILE





FINISHES

● COLORS

DIMENSIONS

⬟ DIAMETERS mm. | HEIGHT 30 mm

350 | 450

LIGHTING OPTIONS

■ DIFFUSERS

SILICONE

POWERS

STANDARD

CRI

90

COLOR TEMPERATURES

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

INSIDE - OUTSIDE

LUMINAIRE INCLUDES

Connection box with luminaire's finish

new



REMOTE

ON DEMAND

Special RAL Color
Number of switches
Tunable White
RGB

.PN

PENDANT

INSTALLATIONS



ALBERTA
DUE MOVE

REF 310004.PN





.PN PENDANT

·310004 ALBERTA DUE MOVE | PN
Pag. 175







ALBERTA DUE MOVE	REF.	DIMEN-SION ⬟	FINISH	DIFFUSER ■	POWER	CRI	K	LUMEN MAX.	WATT	CV	DIMM OP. ▼	SKETCH
	**310004**	**.35**	●	**.SI**	**.ST**	**.9**	**.27**	3692	33	24V	**.DA .PU .D1**	
							.30	3695				
							.40	3697				
	**310004**	**.45**	●	**.SI**	**.ST**	**.9**	**.27**	4747	42	24V	**.DA .PU .D1**	
							.30	4750				
							.40	4753				

Reference order | 310004.XX .PN.XX.XX.ST.9.XX.XX



.PN

PENDANT

- Select finishes





ALBERTA
DUE MOVE


REF 310004.PN

PHOTOMETRY




SILICONE

INCLUDED



PLATEN

PROFILE





FINISHES

● COLORS

DIMENSIONS

⬟ DIAMETERS mm. | HEIGHT 50 mm

350 | 450 | 650 | 950 | 1250

LIGHTING OPTIONS

■ DIFFUSERS

SILICONE

POWERS

STANDARD

CRI

90

COLOR TEMPERATURES

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

INSIDE

LUMINAIRE INCLUDES

2 x Suspension cables 3m
DIM or NON-DIM: 1 x Feed Hose 3 x 0,75mm²
Connection box CB03 with luminaire's finish + CB04



new

ON DEMAND

Special RAL Color
Number of switches
Tunable White
RGB

REMOTE

.PN

PENDANT

INSTALLATIONS

ALUMINIUM SILICONE | 0° | 0° | CRI ≥90 | IK06 | IP20 | LIFE 50000H | DIM OPTIONAL | | REMOTE | INDOOR | 220-240 V 50-60 Hz | CE

ALBERTA
INSIDE VERTICAL

REF. 310008.PN






.PN
PENDANT

·310008 ALBERTA INSIDE VERTICAL | PN
Pag. 175





ALBERTA INSIDE VERTICAL	REF.	DIMEN-SION ⬟	FINISH	DIFFUSER OPTIONS ■	POWER	CRI	K	LUMEN	WATT	CV	DIMM OP. ▼	SKETCH
	**310008**	**.35**	●	**.SI**	**.ST**	**.9**	**.27**	8537	32	24	**.DA .PU .D1**	
							.30	8840				
							.40	9096				
	**310008**	**.45**	●	**.SI**	**.ST**	**.9**	**.27**	10976	41	24	**.DA .PU .D1**	
							.30	11366				
							.40	11694				
	**310008**	**.65**	●	**.SI**	**.ST**	**.9**	**.27**	15854	59	24	**.DA .PU .D1**	
							.30	16418				
							.40	16892				
	**310008**	**.95**	●	**.SI**	**.ST**	**.9**	**.27**	23172	86	24	**.DA .PU .D1**	
							.30	23996				
							.40	24688				
	**310008**	**.125**	●	**.SI**	**.ST**	**.9**	**.27**	30489	113	24	**.DA .PU .D1**	
							.30	31573				
							.40	32484				

Reference order | 310008.XX.PN.XX.SI.ST.9.XX.XX



.PN

PENDANT

- Select finishes





ALBERTA
INSIDE VERTICAL


REF. 310008.PN

PHOTOMETRY




SILICONE

INCLUDED



SC03.SA
WIRE 3M.

PROFILE



20,60



FINISHES

● COLORS

DIMENSIONS

⬟ DIAMETERS mm. | HEIGHT 50 mm

350 | 450

LIGHTING OPTIONS

■ DIFFUSERS

SILICONE

POWERS

STANDARD

CRI

90

COLOR TEMPERATURES

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

SIDE

LUMINAIRE INCLUDES

Movable component for fastening to the ceiling.

new



REMOTE

ON DEMAND

Special RAL Color
Number of switches
Tunable White
RGB

.PN

PENDANT

INSTALLATIONS

ALUMINIUM SILICONE | 45° | 0° | CRI ≥90 | IK06 | IP20 | LIFE 50000H | DIM OPTIONAL | | REMOTE | INDOOR | 220-240 V 50-60 Hz | CE

ALBERTA
INSIDE VTILT

REF. 310009.PN

.PN
PENDANT

·310009 ALBERTA INSIDE VTILT
Pag. 175





ALBERTA INSIDE VTILT	REF.	DIMEN-SION ⬟	FINISH	DIFFUSER OPTIONS ■	POWER	CRI	K	LUMEN	WATT	CV	DIMM * ▼	SKETCH
	310009	.35	●	.SI	.ST	.9	.27	8537	32	24	.DA .PU .D1	
							.30	8840				
							.40	9096				
	310009	.45	●	.SI	.ST	.9	.27	10976	41	24	.DA .PU .D1	
							.30	11366				
							.40	11694				

Reference order | 310009.XX.PN.XX.SI.ST.9.XX.XX



PENDANT

.PN

- Select finishes





ALBERTA
INSIDE VTILT

REF. 310009.PN

PHOTOMETRY




SILICONE

INCLUDED



PROFILE



20,60

A blank canvas.

Imagination, illumination. Limitless light. If that sounds good to you, meet our Line Profiles! Extensive, versatile, with reliable technology and features.

It comes with a wide variety of high quality extruded aluminium profiles with opal, microprismatic or silicone diffusers: Alba, Wing, Alzira, Edge, Linggo, Okkia, Gus, Bubble and Bold, for the most daring.

Un lienzo en blanco.

Imaginar, proyectar, iluminar. Sin condicionantes. Si eso es lo que se pretende, nuestros perfiles lineales y curvos son la familia de productos ideal. Por extensa, por versátil, por tecnología y prestaciones.

Se presentan en una amplia gama de perfiles de aluminio extruido de alta calidad y con difusores opal, microprismático o silicona: Alba, Wing, Alzira, Edge, Linggo, Okkia, Gus, Bubble y Bold, para los más atrevidos.



LINES

PENDANT


PROFILE



ALBERTA
REF. 10176



ALBERTA SLIGHT
REF. 10193

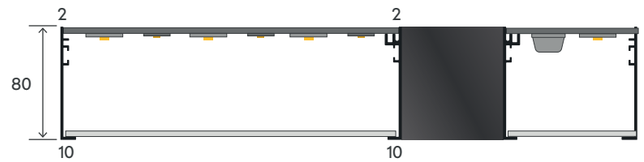

ALBERTA SLIGHT ECCENTRIC
REF. 310005



ALBERTA SOFT
REF. 10217




ALBERTA INSIDE | VERTICAL | VTILT
REF. 10243 | 310008 | 310009




ALBERTA DUE | MOVE
REF. 10250 | 310004


OVERVIEW

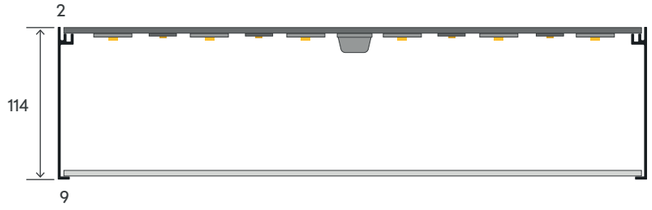


ALABAMA
REF. 10158

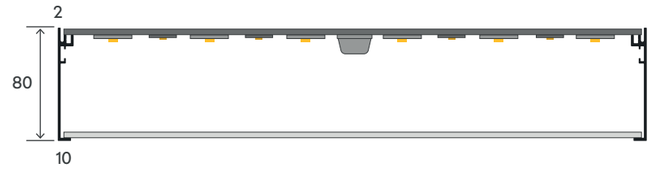


ALABAMA SLIGHT | SQ
REF. 10192 | 10194

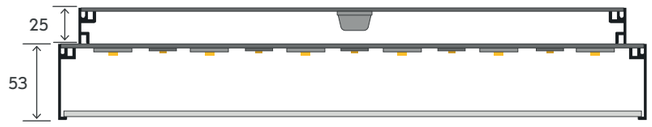


ALABAMA SLIM
REF. 310002




ALABAMA SUPER SLIM | TILT
REF. 310001 | 310007

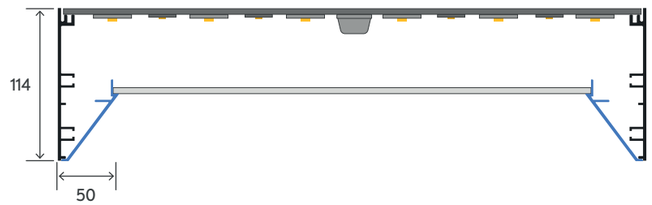

FLORIDA | SQ
REF. 10190 | 10191

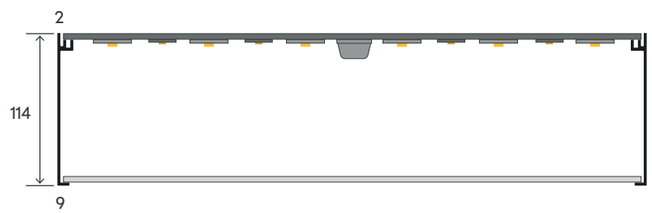


ALTAIR
REF. 10172

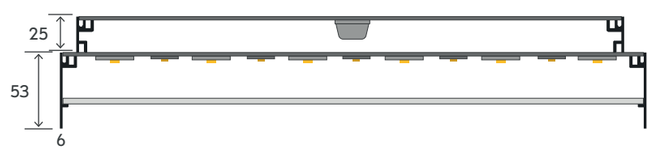


OHIO PN-SR
REF. 10188

ALBA DOUBLE




REF. 10215

WING




REF. 10200

ALBA PLUS ASIMETRIC




REF. 210008

ALBA PLUS




REF. 10178

ALBA NOVUS




REF. 210011

ALZIRA




REF. 10169

ALBA




REF. 10160

ALBA ASIMETRIC




REF. 210009

ALBA MINI




REF. 10211

BOLD




REF. 210001

OKKO MODULAR




REF. 10254

OVALI MODULAR




REF. 10252

MODULIGHT




REF. 10210

ALARIK




REF. 10225

ALARIK SLIM



REF. 20224

ALARIK MINI




REF. 210004

ALARIK SLIM ROUND



REF. 210019


ALARIK MINI ROUND



REF. 210006


PROFILE OVERVIEW

LINGGO




REF. 210002

LINGGO MINI




REF. 210003

OKKIA




REF. 210007

GUS




REF. 210017

BUBBLE




REF. 210010

EYE



REF. 210016

EDGE



REF. 210014



FINISHES

● COLORS

DIMENSIONS

⬟ LENGTHS mm.

863 | 1144 | 1425 | 1706 | 1987 | 2268

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS


DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN | UP-DOWN

LUMINAIRE INCLUDES

.PN
2 x Suspension cables 3m (each 2m)
NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
DIM DOWN or NON-DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm²
DIM DOWN-UP (only): 1 x Feed Hose 5 x 0,75mm²
Diffuser
.SR
Surface mounting kit

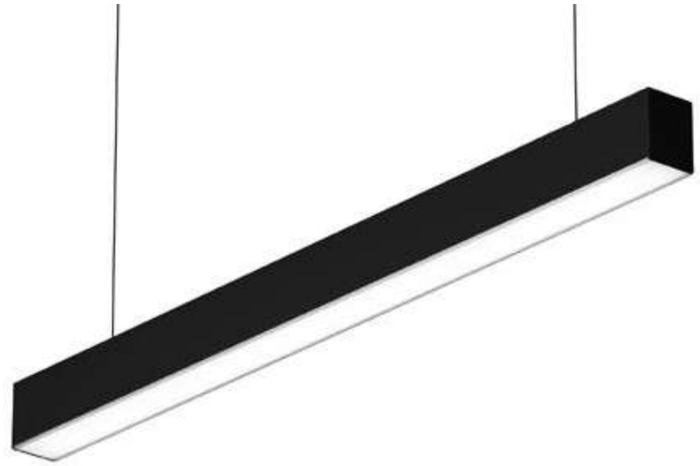





ON DEMAND

Emergency Lighting*
Motion Detection
Well-Certified LED Boards
Taylor your own design
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).

INSTALLATIONS



ALBA
PLUS

REF 10178.PN | 10178.SR



.PN
PENDANT

·10178 ALBA PLUS | PN
Pag. 175

.TK
TRACK

·10178 ALBA PLUS | TK
Pag. 175

.SR
SURFACE


·10178 ALBA PLUS | SR
Pag. 175


.RF
RECESSED FRAME

·10178 ALBA PLUS | RF
Pag. 175

.TR
TRIMLESS

·10178 ALBA PLUS | TR
Pag. 175



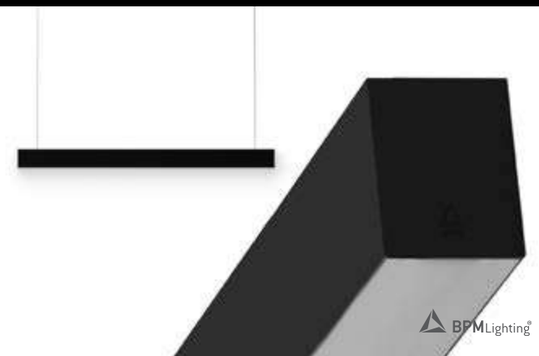

REF.	DIMENSION ⬟	MM	FINISH	DIFFUS-ER ■	POWER	CRI	DOWNLIGHT *4 | LUMEN .27	.30	.40	.TW *1	WATT K	TW	UPLIGHT ▲.UP *2 | LUMEN .27	.30	.40	WATT K	DIMM ▼
10178	.03	863	●	.OP .MP	.ST	.9	2295	2385	2475	5700-5910	18	38	265	274	349	4	.DA .PU .D1
	.04	1144					3060	3180	3300	7600-7880	24	51	397	411	522	6	
	.05	1425					3825	3975	4125	9500-9850	30	64	259	548	696	8	
	.06	1706					4590	4770	4950	11400-11820	35	76	661	685	870	10	
	.07	1987					5355	5565	5775	13300-13790	41	89	793	822	1044	12	
	.08	2268					6120	6360	6600	15200-15760	47	102	925	958	1218	14	

REF.	DIMENSION ⬟	MM	FINISH	DIFFUS-ER ■	POWER	CRI	DOWNLIGHT *4 | LUMEN .27	.30	.40	WATT	UPLIGHT ▲.UP *2 | LUMEN .27	.30	.40	WATT	DIMM ▼
10178	.03	863	●	.OP .MP	.HI	.9	4590	4767	4956	35	568	587	747	8	.DA .PU .D1
	.04	1144					6120	6356	6608	47	851	880	1119	13	
	.05	1425					7650	7945	8260	59	1134	1173	1492	17	
	.06	1706					9180	9534	9912	71	1417	1466	1864	21	
	.07	1987					10710	11123	11564	83	1701	1760	2237	25	
	.08	2268					12240	12712	13216	94	1984	2053	2610	30	

Reference order | 10178.XX | .SR .PN | ● .XX.XX.XX 9.XX.XX.XX

● Select finishes



COMPONENTS

COVERT KIT	REF.	FINISH
	TF01	●

Reference order | TF01 | .SR .PN | ● .XX

REDUGER	REF.	POWER
	ACC.RG	.ST .HI


Reference order | ACC.RG.XX

JOINTS


LINEAR JOINT	ANGLE JOINT	T-JOINT	CROSS JOINT	ROOF-WALL JOINT	FINISH
					●
UR01 40 x75mm	**UL01** 130x130mm	**UT01** 223x151mm	**UC01** 210x210mm	**UV01** 130x130mm	

Reference order | XX01 | .SR .PN | ● .XX


OPTIONS (.PN)

SUSPENSION KIT	REF.	DIMEN-SION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA

SUSPENSION ROD	REF.	DIMEN-SIONS ⬟	mm	FINISH
	SC21	.60	600	●
		.80	800	
		.100	1000	

Reference order | SC21.XX.XX

CONNECTION BOX	FINISH
	●
CB09.12	


Reference order | CB09.12.XX



ALBA PLUS

REF 10178.PN | 10178.SR

PHOTOMETRY




OPAL MICROPRISMATIC

INCLUDED (.PN)

SC03.SA
WIRE 3M.

PROFILE



*1 Tunable White (.TW) values correspond to 2700K and 6500K - .TW is only available for DALI dimmable (.DA), CRI 80 (.8) 700mA. *Los valores del blanco dinámico (.TW) corresponden a 2700K y 6500K. -.TW solo está disponible con protocolo DALI (.DA), CRI 80 (.8) 700mA.*

*2 Upright (.UP) is only available for ON-OFF and DALI dimmable (.DA) options, both in 24VdC. *La luz indirecta está solo disponible para versiones on-off y regulación DALI (.DA), ambas en 24VdC.*

*3 Uplight (.UP) Tunable White (.TW) is defaulted with remote control. When requested with DALI protocol (.DA), consult with the sales team. *La luz indirecta (.UP) en blanco dinámico (.TW) viene predeterminada con mando a distancia. Si se pide con protocolo DALI (.DA), consultar con el equipo comercial.*

*4 Down light (direct light) works at 500mA. *La luz directa trabaja a 500mA.*



FINISHES

● COLORS

DIMENSIONS

⬟ LENGTHS mm.

863 | 1144 | 1425 | 1706 | 1987 | 2268

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS


DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN | UP

LUMINAIRE INCLUDES

.PN
2 x Suspension cables 3m (each 2m)
NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
DIM DOWN or NON-DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm²
DIM DOWN-UP (only): Cabling 2 circuits, 2 x Feed Hose 5 x 0,75mm²
Diffuser
.SR
Surface mounting kit

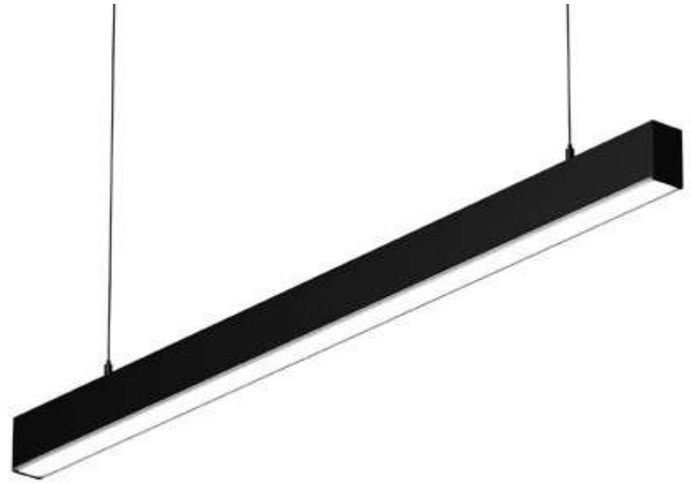





ON DEMAND

Emergency Lighting*
Motion Detection
Well-Certified LED Boards
Taylor your own design
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).

.SR
.PN
PENDANT | SURFACE

INSTALLATIONS



ALBA

REF 10160.PN | 10160.SR



.PN
PENDANT

·10160 ALBA | PN
Pag. 175

.WS
WALL SURFACE

·10160 ALBA | WS
Pag. 175

.TK
TRACK

·10160 ALBA | TK
Pag. 175

.SR
SURFACE


·10160 ALBA | SR
Pag. 175


.RF
RECESSED FRAME

·10160 ALBA | RF
Pag. 175

.TR
TRIMLESS

·10160 ALBA | TR
Pag. 175



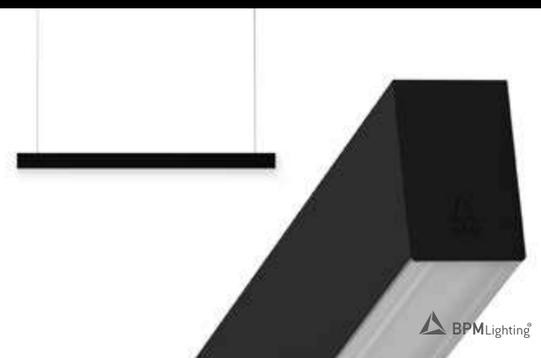

REF.	DIMENSIONS ⬟	MM	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT *4 | LUMEN .27	.30	.40	.TW *1	WATT K	TW	UPLIGHT .UP *2 | LUMEN .27	.30	.40	WATT K	DIMM ▼
10160	.03	863	●	.OP .MP	.ST	.9	2295	2385	2475	5700-5910	18	38	265	274	349	4	.DA .PU .D1
	.04	1144					3060	3180	3300	7600-7880	24	51	397	411	522	6	
	.05	1425					3825	3975	4125	9500-9850	30	64	529	548	696	8	
	.06	1706					4590	4770	4950	11400-11820	35	76	661	685	870	10	
	.07	1987					5355	5565	5775	13300-13790	41	89	793	822	1044	12	
	.08	2268					6120	6360	6600	15200-15760	47	102	925	958	1218	14	

REF.	DIMENSIONS ⬟	MM	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT *4 | LUMEN .27	.30	.40	WATT	UPLIGHT ▲.UP *2 | LUMEN .27	.30	.40	WATT	DIMM ▼
10160	.03	863	●	.OP .MP	.HI	.9	4590	4767	4956	35	568	587	747	8	.DA .PU .D1
	.04	1144					6120	6356	6608	47	851	880	1119	13	
	.05	1425					7650	7945	8260	59	1134	1173	1492	17	
	.06	1706					9180	9534	9912	71	1417	1466	1864	21	
	.07	1987					10710	11123	11564	83	1701	1760	2237	25	
	.08	2268					12240	12712	13216	94	1984	2053	2610	30	

Reference order | 10160.XX | .SR .PN | .XX.XX.XX.9.XX.XX.XX

COMPONENTS

COVERT KIT	REF.	FINISH
	TF02	●

Reference order | TF02 | .SR .PN | ● .XX

REDUGER	REF.	POWER
	ACC.RG	.ST .HI


Reference order | ACC.RG.XX

JOINTS


LINEAR JOINT	ANGLE JOINT	T-JOINT	CROSS JOINT	ROOF-WALL JOINT	FINISH
					●
UR02 40 x57mm	**UL02** 130x130mm	**UT02** 223x129mm	**UC02** 210x210mm	**UV02** 130x130mm	

Reference order | XX02 | .SR .PN | ● .XX


OPTIONS (.PN)

SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA


SUSPENSION ROD	REF.	DIMENSIONS ⬟	mm	FINISH
	SC21	.60	600	●
		.80	800	
		.100	1000	

Reference order | SC21.XX.XX

CONNECTION BOX	FINISH
	●
CB09.12	

Reference order | CB09.12.XX

● Select finishes






ALBA

REF 10160.PN | 10160.SR

PHOTOMETRY




OPAL MICROPRISMATIC

INCLUDED (.PN)

SC03.SA
WIRE 3M.

PROFILE



*1 Tunable White (.TW) values correspond to 2700K and 6500K - .TW is only available for DALI dimmable (.DA), CRI 80 (.8) 700mA. *Los valores del blanco dinámico (.TW) corresponden a 2700K y 6500K. -.TW solo está disponible con protocolo DALI (.DA), CRI 80 (.8) 700mA.*

*2 Uplight (.UP) is only available for ON-OFF and DALI dimmable (.DA) options, both in 24VdC. *La luz indirecta está solo disponible para versiones on-off y regulación DALI (.DA), ambas en 24VdC.*

*3 Uplight (.UP) Tunable White (.TW) is defaulted with remote control. When requested with DALI protocol (.DA), consult with the sales team. *La luz indirecta (.UP) en blanco dinámico (.TW) viene predeterminada con mando a distancia. Si se pide con protocolo DALI (.DA), consultar con el equipo comercial.*

*4 Down light (direct light) works at 500mA. *La luz directa trabaja a 500mA.*

Some product variations require an IP Box, seek advice from our technical team. *Algunas variaciones del producto requieren de una IP Box, consulte con nuestro equipo técnico*



FINISHES

● COLORS

DIMENSIONS

⬟ LENGTHS mm.

868 | 1153 | 1434 | 1715 | 1996 | 2277

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS


DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN | UP-DOWN

LUMINAIRE INCLUDES

.PN
2 x Suspension cables 3m (each 2m)
NON-DIM DOWN or DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
NON-DIM DOWN-UP or DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm²
Diffuser
.SR
Surface mounting kit

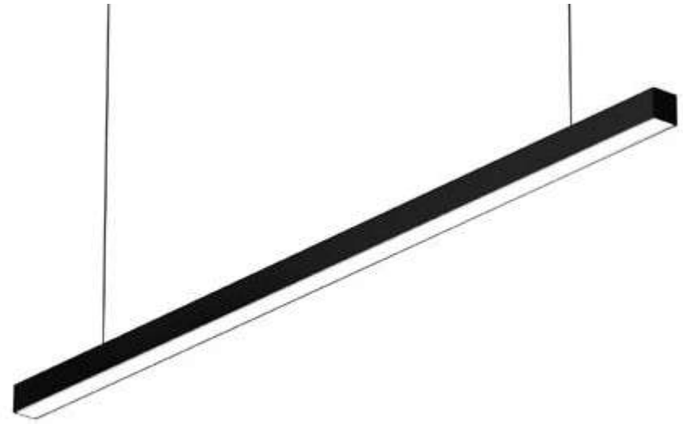





REMOTE

ON DEMAND

Emergency Lighting*
Motion Detection
Well-Certified LED Boards
Taylor your own design
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).


.SR
.PN
PENDANT | SURFACE

INSTALLATIONS

ALUMINIUM PC | 0° | 0° | CRI ≥90 | IK06 | IP20 IP40 | LIFE 50000H | DIM OPTIONAL | REMOTE | INDOOR | 220-240 V 50-60 Hz

ALBA
MINI

REF 10211.PN | 10211.SR

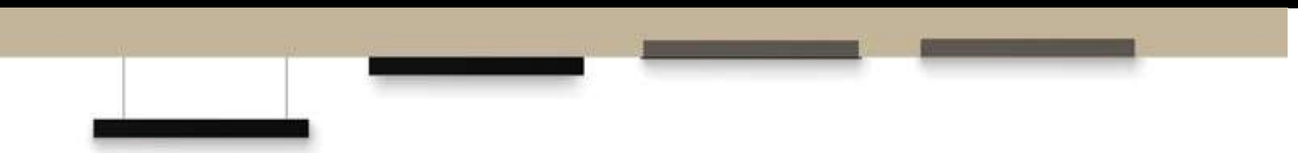

.PN
PENDANT

·10211 ALBA MINI | PN
Pag. 175

.SR
SURFACE


·10211 ALBA MINI | SR
Pag. 175


.RF
RECESSED FRAME

·10211 ALBA MINI | RF
Pag. 175

.TR
TRIMLESS

·10211 ALBA MINI | TR
Pag. 175



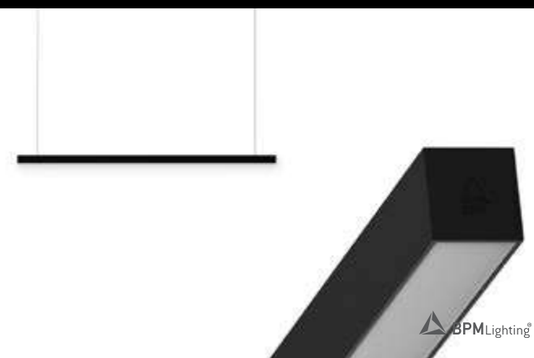

REF.	DIMENSION ⬟	MM	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT *4 | LUMEN .27	.30	.40	.TW*1	WATT K	TW	UPLIGHT ▲.UP *2 | LUMEN .27	.30	.40	WATT K	DIMM ▼
10211	.03	868	●	.OP .MP	.ST	.9	2295	2385	2475	5700-5910	18	38	265	274	349	4	.DA .PU .D1
	.04	1149					3060	3180	3300	7600-7880	24	51	397	411	522	6	
	.05	1430					3825	3975	4125	9500-9850	30	64	259	548	696	8	
	.06	1711					4590	4770	4950	11400-11820	35	76	661	685	870	10	
	.07	1992					5355	5565	5775	13300-13790	41	89	793	822	1044	12	
	.08	2273					6120	6360	6600	15200-15760	47	102	925	958	1218	14	

REF.	DIMENSION ⬟	MM	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT *4 | LUMEN .27	.30	.40	WATT	UPLIGHT ▲.UP *2 | LUMEN .27	.30	.40	WATT	DIMM ▼
10211	.03	868	●	.OP .MP	.HI	.9	4590	4767	4956	35	568	587	747	8	.DA .PU .D1
	.04	1149					6120	6356	6608	47	851	880	1119	13	
	.05	1430					7650	7945	8260	59	1134	1173	1492	17	
	.06	1711					9180	9534	9912	71	1417	1466	1864	21	
	.07	1992					10710	11123	11564	83	1701	1760	2237	25	
	.08	2273					12240	12712	13216	94	1984	2053	2610	30	




Reference order | 10211.XX ⬟ | .SR .PN | .XX.XX ● | .XX.9.XX ■ | .XX.XX ▼ ▲

COMPONENTS

COVERT KIT	REF.	FINISH
	TF03	●

Reference order | TF03 | .SR .PN | ● | .XX

BOXES

CONNECTION BOX FOR REMOTE DRIVER	DRIVER BOX NON-DIMM	DRIVER DRIVER BOX DIMMABLE	FINISH
			●
CB09.12	CB09.32	CB09.40	


Reference order | CB09.XX.XX ●

JOINTS


LINEAR JOINT	ANGLE JOINT	T-JOINT	CROSS JOINT	ROOF-WALL JOINT	FINISH
					●
UR03 40 x 19 mm	UL03 130x130mm	UT03 223x121,5mm	UC03 210x210mm	UV03 130x130mm	

Reference order | XX03 | .SR .PN | ● | .XX

OPTIONS (.PN)

SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA

SUSPENSION ROD	REF.	DIMENSIONS ⬟	mm	FINISH
	SC21	.60	600	●
		.80	800	
		.100	1000	

Reference order | SC21.XX.XX ● ●

● Select finishes






ALBA MINI

REF 10211.PN | 10211.SR

PHOTOMETRY




OPAL MICROPRISMATIC

INCLUDED (.PN)

SC03.SA
WIRE 3M.

PROFILE



*1 Tunable White (.TW) values correspond to 2700K and 6500K - TW is only available for DALI dimmable (.DA), CRI 80 (.8) 700mA. *Los valores del blanco dinámico (.TW) corresponden a 2700K y 6500K. -.TW solo está disponible con protocolo DALI (.DA), CRI 80 (.8) 700mA.*

*2 Uplight (.UP) is only available for ON-OFF and DALI dimmable (.DA) options, both require 24VdC and remote driver with connection box CB0912. *La luz indirecta está solo disponible para versiones on-off y regulación DALI (.DA), ambas requieren 24Vd y driver en remoto con la caja de conexión CB0912.*

*3 Uplight (.UP) Tunable White (.TW) is defaulted with remote control. When requested with DALI protocol (.DA), consult with the sales team. *La luz indirecta (.UP) en blanco dinámico (.TW) viene predeterminada con mando a distancia. Si se pide con protocolo DALI (.DA), consultar con el equipo comercial.*

*4 Down light (direct light) works at 500mA. *La luz directa trabaja a 500mA.*

Some product variations require an IP Box, seek advice from our technical team. *Algunas variaciones del producto requieren de una IP Box, consulte con nuestro equipo técnico*



FINISHES

● COLORS

DIMENSIONS

⬟ LENGTHS mm.

863 | 1144 | 1425 | 1706 | 1987 | 2268

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH


▲ LIGHT DISTRIBUTION

UP - DOWN

LUMINAIRE INCLUDES

2 x Suspension cables 3m (each 2m)
NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
DIM DOWN or NON-DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm²
DIM DOWN-UP (only): Cabling 2 circuits, 2 x Feed Hose 5 x 0,75mm²
Diffuser

new

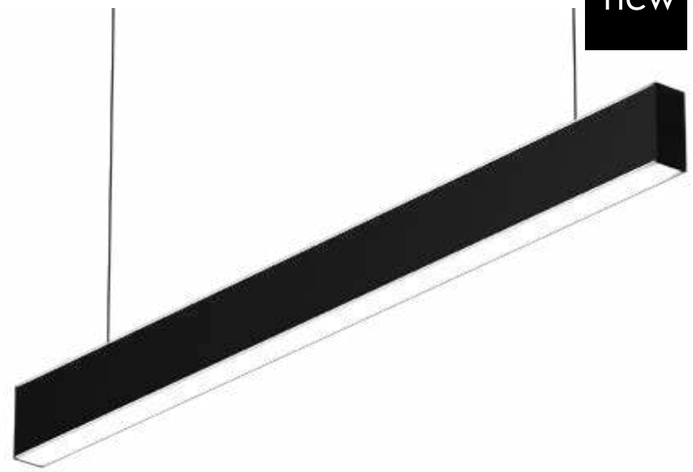





ON DEMAND

Emergency Lighting*
Motion Detection
Well-Certified LED Boards
Taylor your own design
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80
HI power

* Delivered separately
(not installed in luminaire).

.PN

PENDANT

INSTALLATIONS



ALBA
DOUBLE

REF 10215.PN




.PN
PENDANT


·10215 ALBA DOUBLE | PN
Pag. 175



.WS
WALL SURFACE

·10215 ALBA DOUBLE | WS
Pag. 175

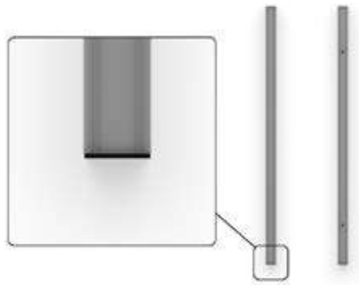

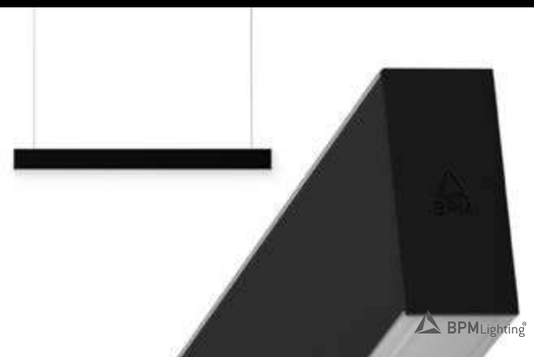

REF.	DIMENSION ⬟	MM	FINISH ●	DIFFUSER ■	POWER	CRI	DOWNLIGHT *2 | LUMEN .27	.30	.40	.TW *1	WATT K	TW	UPLIGHT ▲.UP *2 | LUMEN .27	.30	.40	.TW *1	WATT K	TW	DIMM ▼
10215	.03	883	●	.OP .MP	.ST	.9	2295	2385	2475	5700-5910	18	38	2295	2385	2475	5700-5910	18	38	.DA .PU .D1
	.04	1164					3060	3180	3300	7600-7880	24	51	3060	3180	3300	7600-7880	24	51	
	.05	1445					3825	3975	4125	9500-9850	30	64	3825	3975	4125	9500-9850	30	64	
	.06	1726					4590	4770	4950	11400-11820	35	76	4590	4770	4950	11400-11820	35	76	
	.07	2007					5355	5565	5775	13300-13790	41	89	5355	5565	5775	13300-13790	41	89	
	.08	2288					6120	6360	6600	15200-15760	47	102	6120	6360	6600	15200-15760	47	102	

Reference order | 10215.XX.PN.XX.XX.ST.9.XX.XX.XX

COMPONENTS

COVERT KIT	REF.	FINISH
	TF04	●

Reference order | TF04 .SR .PN ● .XX

JOINTS

LINEAR JOINT


UR04 XX x XXX




OPTIONS (.PN)

SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA

SUSPENSION ROD	REF.	DIMENSIONS ⬟	mm	FINISH
	SC21	.60	600	●
		.80	800	
		.100	1000	

Reference order | SC21.XX.XX

CONNECTION BOX	FINISH
	●
CB09.12	

Reference order | CB09.12.XX

.PN

PENDANT

● Select finishes






ALBA DOUBLE

REF 10215.PN

PHOTOMETRY




OPAL MICROPRISMATIC

INCLUDED (.PN)

SC03.SA
WIRE 3M.

PROFILE



*1 Tunable White (.TW) values correspond to 2700K and 6500K - .TW is only available for DALI dimmable (.DA), CRI 80 (.8) 700mA. *Los valores del blanco dinámico (.TW) corresponden a 2700K y 6500K. -.TW solo está disponible con protocolo DALI (.DA), CRI 80 (.8) 700mA.*

*2 Down light (direct light) and up light (.UP) work at 500mA. *La luz directa e indirecta (.UP) trabaja a 500mA.*



FINISHES

● COLORS

DIMENSIONS

⬟ LENGTHS mm.

863 | 1144 | 1425 | 1706 | 1987 | 2268

LIGHTING OPTIONS

■ DIFFUSERS

-

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH


▲ LIGHT DISTRIBUTION

ASYMETRIC DOWN


LUMINAIRE INCLUDES

.PN
2 x Suspension cables 3m (each 2m)
NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
DIM DOWN: 1 x Feed Hose 5 x 0,75mm²
Connection box SB09.12
.SR
Surface mounting kit

new

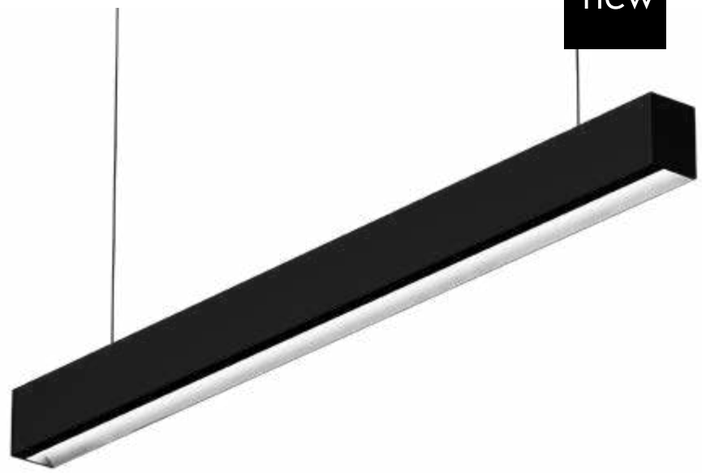





Optimal distance from the wall: 0.5m.
Distancia óptima con respecto a la pared: 0.5m.

ON DEMAND

Emergency Lighting*
Well-Certified LED Boards
Taylor your own design
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80
Motion Detection

* Delivered separately
(not installed in luminaire).

.SR
.PN
PENDANT | SURFACE

INSTALLATIONS



.PN
PENDANT

·210008 ALBA PLUS
ASIMETRIC | PN - Pag. 175

.SR
SURFACE


·210008 ALBA PLUS
ASIMETRIC | SR - Pag. 175

.RF
RECESSED FRAME

·210008 ALBA PLUS
ASIMETRIC | RF - Pag. 175


.TR
TRIMLESS

·210008 ALBA PLUS
ASIMETRIC | TR - Pag. 175



ALBA
PLUS ASIMETRIC

REF 210008.PN | 210008.SR

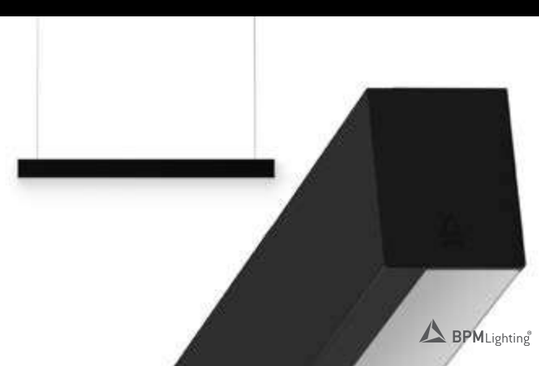

REF.	DIMENSION ⬟	MM	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT *2 | LUMEN .27	.30	.40	.TW *1	WATT K	TW	DIMM ▼
210008	.03	863	●	.OP .MP	.ST	.9	2295	2385	2475	5700-5910	18	38	.DA .PU .D1
	.04	1144					3060	3180	3300	7600-7880	24	51	
	.05	1425					3825	3975	4125	9500-9850	30	64	
	.06	1706					4590	4770	4950	11400-11820	35	76	
	.07	1987					5355	5565	5775	13300-13790	41	89	
	.08	2268					6120	6360	6600	15200-15760	47	102	

REF.	DIMENSION ⬟	MM	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT *2 | LUMEN .27	.30	.40	WATT	DIMM ▼
210008	.03	863	●	.OP .MP	.HI	.9	4590	4767	4956	35	.DA .PU .D1
	.04	1144					6120	6356	6608	47	
	.05	1425					7650	7945	8260	59	
	.06	1706					9180	9534	9912	71	
	.07	1987					10710	11123	11564	83	
	.08	2268					12240	12712	13216	94	

Reference order | 210008.XX | .SR .PN | .XX.XX.XX.9.XX.XX

COMPONENTS

COVERT KIT	REF.	FINISH
	TF05	●

Reference order | TF05 | .SR .PN | ● .XX

JOINTS

LINEAR JOINT


UR05 XX x XXX




OPTIONS (.PN)

SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA

SUSPENSION ROD	REF.	DIMENSIONS ⬟	mm	FINISH
	SC21	.60	600	
		.80	800	●
		.100	1000	

Reference order | SC21.XX.XX

CONNECTION BOX	FINISH
	●
CB09.12	

Reference order | CB09.12.XX

● Select finishes





ALBA
PLUS ASIMETRIC

REF 210008.PN | 210008.SR

PHOTOMETRY




TRANSPARENT PC

INCLUDED (.PN)

SC03.SA
WIRE 3M.

PROFILE



*1 Tunable White (.TW) values correspond to 2700K and 6500K - .TW is only available for DALI dimmable (.DA), CRI 80 (.8) 700mA. *Los valores del blanco dinámico (.TW) corresponden a 2700K y 6500K. -.TW solo está disponible con protocolo DALI (.DA), CRI 80 (.8) 700mA.*
*2 Down light (direct light) works at 500mA. *La luz directa trabaja a 500mA.*



FINISHES

● COLORS

DIMENSIONS

⬟ LENGTHS mm.

863 | 1144 | 1425 | 1706 | 1987 | 2268

LIGHTING OPTIONS

■ DIFFUSERS

-

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

ASYMETRIC DOWN

LUMINAIRE INCLUDES

.PN
2 x Suspension cables 3m (each 2m)
NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
DIM DOWN: 1 x Feed Hose 5 x 0,75mm²
.SR
Surface mounting kit

new





Optimal distance from the wall: 0.5m.
Distancia óptima con respecto a la pared: 0.5m.



ON DEMAND

Emergency Lighting*
Well-Certified LED Boards
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).

INSTALLATIONS



ALBA
ASIMETRIC

REF 210009.PN | 210009.SR



.PN
PENDANT

·210009 ALBA ASIMETRIC
| PN - Pag. 175

.WS
WALL SURFACE

·210009 ALABA ASIMETRIC
| WS - Pag. 175

.SR
SURFACE


·210009 ALBA ASIMETRIC
| SR - Pag. 175


.RF
RECESSED FRAME

·210009 ALBA ASIMETRIC
| RF - Pag. 175

.TR
TRIMLESS

·210009 ALBA ASIMETRIC
| TR - Pag. 175



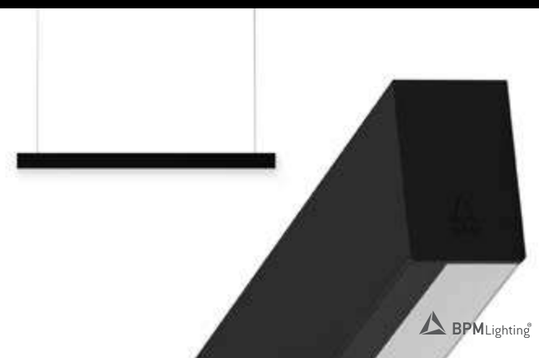

REF.	DIMENSION ⬟	MM	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT *2 | LUMEN .27	.30	.40	.TW *1	WATT K	TW	DIMM ▼
210009	.03	863	●	.OP .MP	.ST	.9	2295	2385	2475	5700-5910	18	38	.DA .PU .D1
	.04	1144					3060	3180	3300	7600-7880	24	51	
	.05	1425					3825	3975	4125	9500-9850	30	64	
	.06	1706					4590	4770	4950	11400-11820	35	76	
	.07	1987					5355	5565	5775	13300-13790	41	89	
	.08	2268					6120	6360	6600	15200-15760	47	102	

REF.	DIMENSION ⬟	MM	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT *2 | LUMEN .27	.30	.40	WATT	DIMM ▼
210009	.03	863	●	.OP .MP	.HI	.9	4590	4767	4956	35	.DA .PU .D1
	.04	1144					6120	6356	6608	47	
	.05	1425					7650	7945	8260	59	
	.06	1706					9180	9534	9912	71	
	.07	1987					10710	11123	11564	83	
	.08	2268					12240	12712	13216	94	

Reference order | 210009.XX | .SR .PN | ● | ■ | ▼

COMPONENTS

COVERT KIT	REF.	FINISH
	TF06	●

Reference order | TF06 | .SR .PN | ● .XX




JOINTS


LINEAR JOINT

UR06 XX x XXX


OPTIONS (.PN)

SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA

SUSPENSION ROD	REF.	DIMENSIONS ⬟	mm	FINISH
	SC21	.60	600	●
		.80	800	
		.100	1000	

Reference order | SC21.XX.XX

CONNECTION BOX	FINISH
	●
CB09.12	

Reference order | CB09.12.XX

● Select finishes





ALBA
ASIMETRIC

REF 210009.PN | 210009.SR

PHOTOMETRY




TRANSPARENT PC

INCLUDED (.PN)

SC03.SA
WIRE 3M.

PROFILE



*1 Tunable White (.TW) values correspond to 2700K and 6500K - .TW is only available for DALI dimmable (.DA), CRI 80 (.8) 700mA. *Los valores del blanco dinámico (.TW) corresponden a 2700K y 6500K. -.TW solo está disponible con protocolo DALI (.DA), CRI 80 (.8) 700mA.*
*2 Down light (direct light) works at 500mA. *La luz directa trabaja a 500mA.*



FINISHES

● COLORS

DIMENSIONS

⬟ LENGTHS mm.

863 | 1144 | 1425 | 1706 | 1987 | 2268

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

UP-DOWN


LUMINAIRE INCLUDES

2 x Suspension cables 3m (each 2m)
NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
DIM DOWN or NON-DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm²
DIM DOWN-UP (only): Cabling 2 circuits, 2 x Feed Hose 5 x 0,75mm²
Diffuser

new







ON DEMAND

Emergency Lighting*
Motion Detection
Well-Certified LED Boards
Taylor your own design
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).

INSTALLATIONS




ALBA
NOVUS


REF 210011.PN



.PN
PENDANT

·210011 ALBA NOVUS | PN
Pag. 175

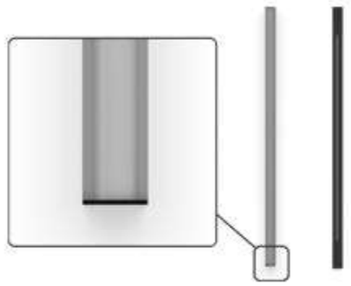

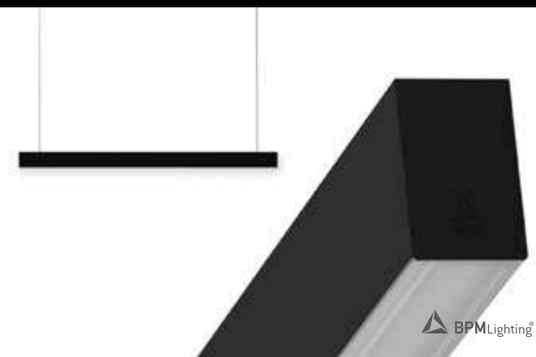

REF.	DIMENSION ⬟	MM	FINISH	DIFFUS-ER ■	POWER	CRI	DOWNLIGHT *5 | LUMEN .27	.30	.40	.TW *2	WATT K	TW	UPLIGHT ▲.UP *3 | LUMEN .27	.30	.40	WATT K	DIMM ▼
210011	.03	863	●	.OP	.ST	.9	2295	2385	2475	5700-5910	18	38	265	274	349	4	.DA *1 .PU .D1
	.04	1144					3060	3180	3300	7600-7880	24	51	397	411	522	6	
	.05	1425					3825	3975	4125	9500-9850	30	64	259	548	696	8	
	.06	1706					4590	4770	4950	11400-11820	35	76	661	685	870	10	
	.07	1987					5355	5565	5775	13300-13790	41	89	793	822	1044	12	
	.08	2268					6120	6360	6600	15200-15760	47	102	925	958	1218	14	

REF.	DIMENSION ⬟	MM	FINISH	DIFFUS-ER ■	POWER	CRI	DOWNLIGHT *5 | LUMEN .27	.30	.40	WATT	UPLIGHT ▲.UP *3 | LUMEN .27	.30	.40	WATT K	DIMM ▼
210011	.03	863	●	.OP	.HI	.9	4590	4767	4956	35	568	587	747	8	.DA *1 .PU .D1
	.04	1144					6120	6356	6608	47	851	880	1119	13	
	.05	1425					7650	7945	8260	59	1134	1173	1492	17	
	.06	1706					9180	9534	9912	71	1417	1466	1864	21	
	.07	1987					10710	11123	11564	83	1701	1760	2237	25	
	.08	2268					12240	12712	13216	94	1984	2053	2610	30	

Reference order | 210011.XX.PN.XX.XX.XX.9.XX.XX.XX

COMPONENTS

COVERT KIT	REF.	FINISH
	TF07	●

Reference order | TF07.PN.XX

REDUGER	REF.	POWER
	ACC.RG	.ST .HI


Reference order | ACC.RG.XX

JOINTS


LINEAR JOINT	ANGLE JOINT 2 LINES	ANGLE JOINT 3 LINES	CROSS JOINT	ROOF-WALL JOINT	FINISH
			X	X	●
UR07 XX x XXX	AM07 69 x 43 x 49	AMY07 69 x 43 x 65	X	X	

Reference order | XX07 | .SR .PN | ● .XX


OPTIONS (.PN)

SUSPENSION KIT	REF.	DIMEN-SION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA

SUSPENSION ROD	REF.	DIMEN-SIONS ⬟	mm	FINISH
	SC21	.60	600	●
		.80	800	
		.100	1000	

Reference order | SC21.XX.XX

CONNECTION BOX	FINISH
	●
CB09.12	

Reference order | CB09.12.XX

.PN

PENDANT

● Select finishes




.WH-WH .BK-BK .GC-GC .BM-BM .BS-BS .BC-BC .CR-CR .CB-CB .GY-GY .MG-MG .VC-VC .YM-YM



ALBA NOVUS

REF 210011.PN

PHOTOMETRY




OPAL MICROPRISMATIC

INCLUDED

SC03.SA
WIRE 3M.

PROFILE



*1 DALI protocol requires remote driver. *Protocolo DALI requiere driver en remoto.*
*2 Tunable White (.TW) values correspond to 2700K and 6500K - .TW is only available for DALI dimmable (.DA), CRI 80 (.8) 700mA. *Los valores del blanco dinámico (.TW) corresponden a 2700K y 6500K. .TW solo está disponible con protocolo DALI (.DA), CRI 80 (.8) 700mA.*
*3 Uplight (.UP) is only available for ON-OFF and DALI dimmable (.DA) options, both in 24VdC. *La luz indirecta está solo disponible para versiones on-off y regulación DALI (.DA), ambas en 24VdC.*
*4 Uplight (.UP) Tunable White (.TW) is defaulted with remote control. When requested with DALI protocol (.DA), consult with the sales team. *La luz indirecta (.UP) en blanco dinámico (.TW) viene predeterminada con mando a distancia. Si se pide con protocolo DALI (.DA), consultar con el equipo comercial.*
*5 Down light (direct light) works at 500mA. *La luz directa trabaja a 500mA.*



FINISHES

● COLORS

DIMENSIONS

⬟ LENGTHS mm.

863 | 1144 | 1425 | 1706 | 1987 | 2268

LIGHTING OPTIONS

■ DIFFUSERS

OPAL

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH


▲ LIGHT DISTRIBUTION


DOWN

LUMINAIRE INCLUDES

Surface mounting kit

new

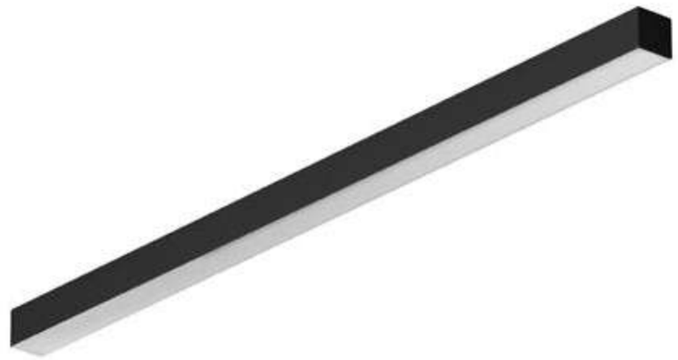

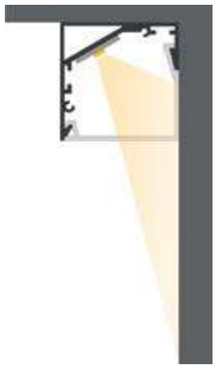

REMOTE

ON DEMAND

Emergency Lighting*
Motion Detection
Well-Certified LED Boards
Taylor your own design
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).

.SR

SURFACE

INSTALLATIONS

ALUMINIUM PC | 0° | 0° | CRI ≥90 | IK06 | IP20 IP40 | LIFE 50000H | DIM OPTIONAL | REMOTE | INDOOR | 220-240 V 50-60 Hz


EDGE

REF 210014.SR



.SR
SURFACE

·210014 EDGE | SR
Pag. 175





REF.	DIMENSION ⬟	MM	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT *2 | LUMEN .27	.30	.40	.TW *1	WATT K	TW	DIMM ▼
210014	**.03**	**863**	●	.OP .MP	.ST	.9	2295	2385	2475	5700-5910	18	38	.DA .PU .D1
	.04	1144					3060	3180	3300	7600-7880	24	51	
	.05	1425					3825	3975	4125	9500-9850	30	64	
	.06	1706					4590	4770	4950	11400-11820	35	76	
	.07	1987					5355	5565	5775	13300-13790	41	89	
	.08	2268					6120	6360	6600	15200-15760	47	102	

REF.	DIMENSION ⬟	MM	FINISH	DIFUSSER ■	POWER	CRI	DOWNLIGHT | LUMEN .27	.30	.40	WATT	DIMM ▼
210014	**.03**	863	●	.OP .MP	.HI	.9	4590	4767	4956	35	.DA .PU .D1
	.04	1144					6120	6356	6608	47	
	.05	1425					7650	7945	8260	59	
	.06	1706					9180	9534	9912	71	
	.07	1987					10710	11123	11564	83	
	.08	2268					12240	12712	13216	94	

Reference order | 210014.XX.SR.XX.XX.XX.9.XX.XX



COMPONENTS

COVERT KIT	REF.	FINISH
	TF08	●

Reference order | TF08.SR.XX

JOINTS

LINEAR JOINT

UR08 XX x XXX

.SR

SURFACE

● Select finishes



.WH-WH .BK-BK



EDGE

REF 210014.SR

PHOTOMETRY

OPAL


INCLUDED



X 2

SR INSTALATION KIT

PROFILE





FINISHES

● COLORS

DIMENSIONS

⬟ LENGTHS mm.

863 | 1144 | 1425 | 1706 | 1987 | 2268

LIGHTING OPTIONS

■ DIFFUSERS

OPAL

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN | UP-DOWN

LUMINAIRE INCLUDES

.PN
2 x Suspension cables 3m (each 2m)
NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
DIM DOWN or NON-DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm²
DIM DOWN-UP (only): Cabling 2 circuits, 2 x Feed Hose 5 x 0,75mm²
Diffuser
.SR
Surface mounting kit

new







ON DEMAND

Emergency Lighting*
Motion Detection
Well-Certified LED Boards
Taylor your own design
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).

LINGGO

REF 210002.PN | 210002.SR

ALUMINIUM PC | 0° | 0° | CRI ≥90 | IK06 | IP20 IP40 | LIFE 50000H | DIM OPTIONAL | INTEGRATED | INDOOR | 220-240 V 50-60 Hz

INSTALLATIONS






.PN
PENDANT

·210002 LINGGO | PN
Pag. 175

.SR
SURFACE

·210002 LINGGO | SR
Pag. 175

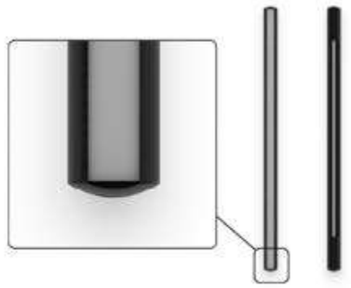



REF.	DIMENSION		FINISH	DIFFUS-ER ■	POWER	CRI	DOWNLIGHT *5 .27	.30	.40	.TW *2	WATT K	TW	UPLIGHT .UP *3 | LUMEN .27	.30	.40	WATT K	DIMM OP. ▼
210002	.03	863	●	.OP	.ST	.9	2295	2385	2475	5700-5910	18	38	265	274	349	4	.DA *1 .PU .D1
	.04	1144					3060	3180	3300	7600-7880	24	51	397	411	522	6	
	.05	1425					3825	3975	4125	9500-9850	30	64	259	548	696	8	
	.06	1706					4590	4770	4950	11400-11820	35	76	661	685	870	10	
	.07	1987					5355	5565	5775	13300-13790	41	89	793	822	1044	12	
	.08	2268					6120	6360	6600	15200-15760	47	102	925	958	1218	14	

REF.	DIMENSION ⬟	MM	FINISH	DIFFUS-ER ■	POWER	CRI	DOWNLIGHT *5 | LUMEN .27	.30	.40	WATT	UPLIGHT ▲.UP *3 | LUMEN .27	.30	.40	WATT	DIMM OP. ▼
210002	.03	863	●	.OP	.HI	.9	4590	4767	4956	35	568	587	747	8	.DA *1 .PU .D1
	.04	1144					6120	6356	6608	47	851	880	1119	13	
	.05	1425					7650	7945	8260	59	1134	1173	1492	17	
	.06	1706					9180	9534	9912	71	1417	1466	1864	21	
	.07	1987					10710	11123	11564	83	1701	1760	2237	25	
	.08	2268					12240	12712	13216	94	1984	2053	2610	30	

Reference order | 210002.XX | .SR .PN | .XX.XX.XX.9.XX.XX.XX

COMPONENTS

COVERT KIT	REF.	FINISH
	TF09	●

Reference order | TF09 | .SR .PN | .XX

REDUGER	REF.	POWER
	ACC.RG	.ST .HI


Reference order | ACC.RG.XX

JOINTS


LINEAR JOINT	ANGLE JOINT	T-JOINT	CROSS JOINT	ROOF-WALL JOINT	FINISH
		X	X	X	●
UR09 XX x XXX	**UL09** XX x XX	X	X	X	

Reference order | XX09 | .SR .PN | .XX


OPTIONS (.PN)

SUSPENSION KIT	REF.	DIMEN-SION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA

SUSPENSION ROD	REF.	DIMEN-SIONS ⬟	mm	FINISH
	SC21	.60	600	●
		.80	800	
		.100	1000	

Reference order | SC21.XX.XX

CONNECTION BOX	FINISH
	●
CB09.12	

Reference order | CB09.12.XX

● Select finishes





LINGGO

REF 210002.PN | 210002.SR

PHOTOMETRY




OPAL

INCLUDED (.PN)

SC03.SA
WIRE 3M.

PROFILE



*1 DALI protocol requires remote driver. *Protocolo DALI requiere driver en remoto.*
*2 Tunable White (.TW) values correspond to 2700K and 6500K - TW is only available for DALI dimmable (.DA), CRI 80 (.8) 700mA. *Los valores del blanco dinámico (.TW) corresponden a 2700K y 6500K. .TW solo está disponible con protocolo DALI (.DA), CRI 80 (.8) 700mA.*
*3 Uplight (.UP) is only available for ON-OFF and DALI dimmable (.DA) options, both in 24VdC. *La luz indirecta está solo disponible para versiones on-off y regulación DALI (.DA), ambas en 24VdC.*
*4 Uplight (.UP) Tunable White (.TW) is defaulted with remote control. When requested with DALI protocol (.DA), consult with the sales team. *La luz indirecta (.UP) en blanco dinámico (.TW) viene predeterminada con mando a distancia. Si se pide con protocolo DALI (.DA), consultar con el equipo comercial.*
*5 Down light (direct light) works at 500mA. *La luz directa trabaja a 500mA.*



FINISHES

● COLORS

DIMENSIONS

⬟ LENGTHS mm.

863 | 1144 | 1425 | 1706 | 1987 | 2268

LIGHTING OPTIONS

■ DIFFUSERS

OPAL

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH


▲ LIGHT DISTRIBUTION

DOWN | UP-DOWN

LUMINAIRE INCLUDES

.PN
2 x Suspension cables 3m (each 2m)
NON-DIM DOWN or DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
NON-DIM DOWN-UP or DIM DOWN-UP (only): 1 x Feed Hose 5 x 0,75mm²
Diffuser
.SR
Surface mounting kit

new

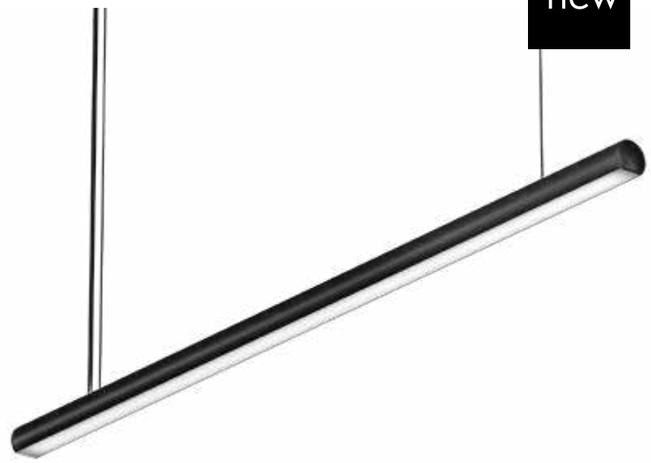





REMOTE

ON DEMAND

Emergency Lighting *
Motion Detection
Well-Certified LED Boards
Taylor your own design
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).

INSTALLATIONS

ALUMINIUM PC | 0° | 0° | CRI ≥90 | IK08
IP20 IP40 | LIFE 50000H | DIM OPTIONAL | | REMOTE
INDOOR | | 220-240 V 50-60 Hz | CE

LINGGO
MINI

REF 210003.PN | 210003.SR






.PN
PENDANT

·210003 LINGGO MINI | PN
Pag. 175

.SR
SURFACE

·210003 LINGGO MINI | SR
Pag. 175

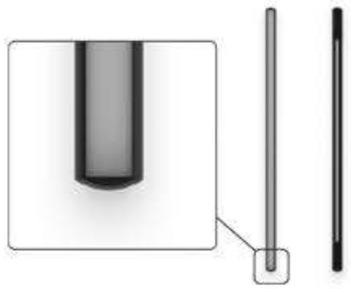





REF.	DIMENSION ⬟	MM	FINISH	DIFFUS-ER ■	POWER	CRI	DOWNLIGHT *4 | LUMEN .27	.30	.40	.TW *1	WATT K	TW	UPLIGHT ▲.UP *2 | LUMEN .27	.30	.40	WATT K	DIMM ▼
210003	**.03**	**863**	●	.OP .MP	.ST	.9	2295	2385	2475	5700-5910	18	38	265	274	349	4	.DA .PU .D1
	.04	1144					3060	3180	3300	7600-7880	24	51	397	411	522	6	
	.05	1425					3825	3975	4125	9500-9850	30	64	259	548	696	8	
	.06	1706					4590	4770	4950	11400-11820	35	76	661	685	870	10	
	.07	1987					5355	5565	5775	13300-13790	41	89	793	822	1044	12	
	.08	2268					6120	6360	6600	15200-15760	47	102	925	958	1218	14	

REF.	DIMENSION ⬟	MM	FINISH	DIFFUS-ER ■	POWER	CRI	DOWNLIGHT *4 | LUMEN .27	.30	.40	WATT	UPLIGHT ▲.UP *2 | LUMEN .27	.30	.40	WATT	DIMM ▼
210003	**.03**	863	●	.OP .MP	.HI	.9	4590	4767	4956	35	568	587	747	8	.DA .PU .D1
	.04	1144					6120	6356	6608	47	851	880	1119	13	
	.05	1425					7650	7945	8260	59	1134	1173	1492	17	
	.06	1706					9180	9534	9912	71	1417	1466	1864	21	
	.07	1987					10710	11123	11564	83	1701	1760	2237	25	
	.08	2268					12240	12712	13216	94	1984	2053	2610	30	




Reference order | 210003.XX ⬟ | .SR .PN | ● | ■ | .XX.XX.XX.9.XX ▼ | .XX.XX ▲

COMPONENTS

COVERT KIT	REF.	FINISH
	**TF10**	●

Reference order | TF10 | .SR .PN | ● | .XX

BOXES

CONNECTION BOX FOR REMOTE DRIVER	DRIVER BOX NON-DIMM	DRIVER DRIVER BOX DIMMABLE	FINISH
			●
CB09.12	**CB09.32**	**CB09.40**	

Reference order | CB09.XX.XX ●

JOINTS

LINEAR JOINT	ANGLE JOINT	T-JOINT	CROSS JOINT	ROOF-WALL JOINT	FINISH
		**X**	**X**	**X**	●
UR10 XX x XXX	**UL10** 34 x 133	X	X	X	

Reference order | XX10 | .SR .PN | ● | .XX

OPTIONS (.PN)

SUSPENSION KIT	REF.	DIMEN-SION	FINISH
	**SC05**	5M.	**.SA**
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA

● Select finishes






LINGGO
MINI

REF 210003.PN | 210003.SR

PHOTOMETRY




OPAL MICROPRISMATIC

INCLUDED (.PN)

SC03.SA
WIRE 3M.

PROFILE



*1 Tunable White (.TW) values correspond to 2700K and 6500K - .TW is only available for DALI dimmable (.DA), CRI 80 (.8) 700mA. *Los valores del blanco dinámico (.TW) corresponden a 2700K y 6500K. -.TW solo está disponible con protocolo DALI (.DA), CRI 80 (.8) 700mA.*

*2 Uplight (.UP) is only available for ON-OFF and DALI dimmable (.DA) options, both in 24VdC. *La luz indirecta está solo disponible para versiones on-off y regulación DALI (.DA), ambas en 24VdC.*

*3 Uplight (.UP) Tunable White (.TW) is defaulted with remote control. When requested with DALI protocol (.DA), consult with the sales team. *La luz indirecta (.UP) en blanco dinámico (.TW) viene predeterminada con mando a distancia. Si se pide con protocolo DALI (.DA), consultar con el equipo comercial.*

*4 Down light (direct light) works at 500mA. *La luz directa trabaja a 500mA.*



FINISHES

● COLORS

DIMENSIONS

⬟ LENGTHS mm.

860 | 1120 | 1420 | 1690 | 1980 | 2250

LIGHTING OPTIONS

■ DIFFUSERS

OPAL

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

UP-DOWN

LUMINAIRE INCLUDES

.PN
2 x Suspension cables 3m (each 2m)
NON-DIM DOWN-UP: 1 x Feed Hose 3 x 0,75mm²
DIM DOWN-UP: Cabling 1 circuits, 1 x Feed Hose 3 x 0,75mm²
Diffuser
.SR
Surface mounting kit

new







REMOTE


ON DEMAND

RGB
TW
Number switches

.SR
.PN
PENDANT | SURFACE

OKKIA

REF 210007.PN | 210007.SR



INSTALLATIONS






.PN
PENDANT

·210007 OKKIA| PN
Pag. 175

.SR
SURFACE

·210007 OKKIA| SR
Pag. 175

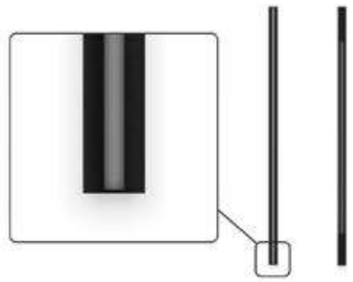



REF.	DIMENSION ⬟	MM	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT | LUMEN .27	.30	.40	WATT K	UPLIGHT ▲.UP *1 | LUMEN .27	.30	.40	WATT K	DIMM ▼
210007	.03	860	●	.OP	.ST	.9	3261	3377	3474	24	263	273	347	4	.DA .PU .D1
	.04	1120					3882	4020	4136	29	385	399	508	6	
	.05	1420					5435	5628	5790	40	526	545	693	8	
	.06	1690					6483	6713	6907	48	653	677	860	10	
	.07	1980					7609	7879	8107	56	790	818	1040	12	
	.08	2250					8657	8965	9223	64	917	959	1208	14	




Reference order | 210007.XX | .SR .PN | .XX.XX .ST9.XX .XX.XX

COMPONENTS

COVERT KIT	REF.	FINISH
	TF11	●


Reference order | TF11 | .SR .PN | .XX

BOXES


CONNECTION BOX FOR REMOTE DRIVER	DRIVER BOX NON-DIMM	DRIVER DRIVER BOX DIMMABLE	FINISH
			●
CB09.12	CB06.32	CB06.40	

Reference order | CB09.XX.XX


OPTIONS (.PN)

SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA

SUSPENSION ROD	REF.	DIMENSIONS ⬟	mm	FINISH
	SC21	.60	600	●
		.80	800	
		.100	1000	

Reference order | SC21.XX.XX

CONNECTION BOX	FINISH
	●
CB09.12	

Reference order | CB09.12.XX

● Select finishes





OKKIA

REF 210007.PN | 210007.SR

PHOTOMETRY




OPAL

INCLUDED (.PN)

SC03.SA
WIRE 3M.

PROFILE



*1 Uplight (.UP) is only available for ON-OFF and DALI dimmable (.DA) options, both in 24VdC. *La luz indirecta está solo disponible para versiones on-off y regulación DALI (.DA), ambas en 24VdC.*



FINISHES

● COLORS

DIMENSIONS

⬟ LENGTHS mm.

863 | 1144 | 1425 | 1706 | 1987 | 2268

LIGHTING OPTIONS

■ DIFFUSERS

OPAL

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH


▲ LIGHT DISTRIBUTION

UP-DOWN

LUMINAIRE INCLUDES

2 x Suspension cables 3m (each 2m)
NON-DIM DOWN or DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
Diffuser

new

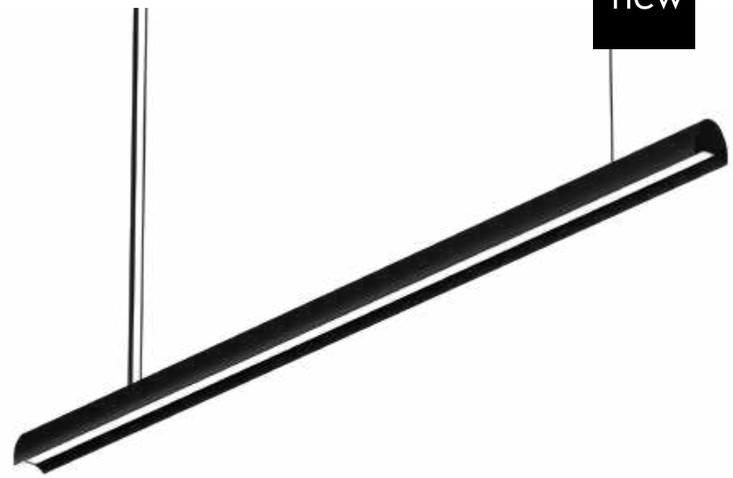





ON DEMAND

RGB
Tunable White

REMOTE

.PN

PENDANT

INSTALLATIONS




GUS

REF 210017.PN



.PN
PENDANT

·210017 GUS | PN
Pag. 175

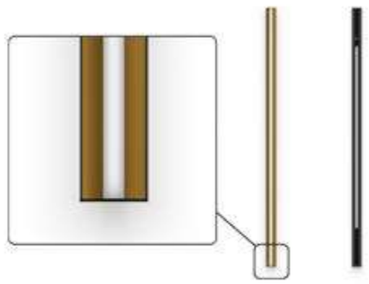

REF.	DIMENSION ⬟	MM	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT*2 | LUMEN .27	.30	.40	WATT K	UPLIGHT ▲.UP *1 | LUMEN .27	.30	.40	WATT K	DIMM ▼
210017	.03	860	●	.OP	.ST	.9	3261	3377	3474	24	263	273	347	4	.DA .PU .D1
	.04	112					3882	4020	4136	29	385	399	508	6	
	.05	1420					5435	5628	5790	40	526	545	693	8	
	.06	1690					6483	6713	6907	48	653	677	860	10	
	.07	1980					7609	7879	8107	56	790	818	1040	12	
	.08	2250					8657	8965	9223	64	917	959	1208	14	




Reference order | 210017.XX | .SR .PN | .XX.XX.ST.9.XX.XX.XX

COMPONENTS

COVERT KIT	REF.	FINISH
	TF12	●

Reference order | TF12.PN.XX

BOXES

CONNECTION BOX FOR REMOTE DRIVER	DRIVER BOX NON-DIMM	DRIVER DRIVER BOX DIMMABLE	FINISH
			●
CB09.12	CB09.32	CB09.40	

Reference order | CBXXXX.XX

OPTIONS

SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA

● Select finishes






GUS

REF 210017.PN

PHOTOMETRY




OPAL

INCLUDED

SC03.SA
WIRE 3M.

PROFILE





FINISHES

● EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ LENGTHS mm.

863 | 1144 | 1425 | 1706 | 1987 | 2268

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS


DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN | UP-DOWN

LUMINAIRE INCLUDES

.PN
2 x Suspension cables 3m (each 2m)
NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
DIM DOWN or NON-DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm²
DIM DOWN-UP (only): Cabling 2 circuits, 2 x Feed Hose 5 x 0,75mm²
Diffuser &Electric system
.SR
Surface mounting kit

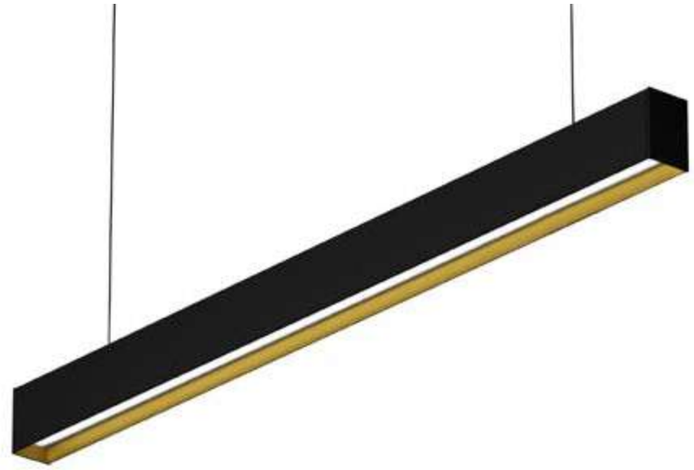





ON DEMAND

Emergency Lighting *
Motion Detection
Well-Certified LED Boards
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80


* Delivered separately
(not installed in luminaire).

WING

REF 10200.PN | 10200.SR

INSTALLATIONS



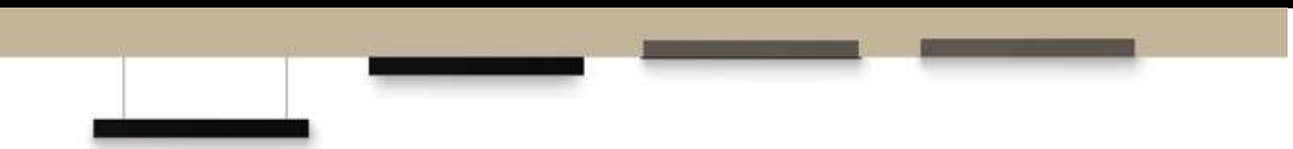

.PN
PENDANT

·10200 WING | PN
Pag. 175

.SR
SURFACE


·10200 WING | SR
Pag. 175

.RF
RECESSED FRAME

·10200 WING | RF
Pag. 175

.TR
TRIMLESS

·10200 WING | TR
Pag. 175





REF.	DIMENSION ⬟	MM	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT *5 | LUMEN .27	.30	.40	.TW *2	WATT K	TW	UPLIGHT ▲.UP *3 | LUMEN .27	.30	.40	WATT K	DIMM ▼
10200	.03	863	●	.OP .MP	.ST	.9	2295	2385	2475	5700-5910	18	38	265	274	349	4	.DA*1 .PU .D1
	.04	1144					3060	3180	3300	7600-7880	24	51	397	411	522	6	
	.05	1425					3825	3975	4125	9500-9850	30	64	259	548	696	8	
	.06	1706					4590	4770	4950	11400-11820	35	76	661	685	870	10	
	.07	1987					5355	5565	5775	13300-13790	41	89	793	822	1044	12	
	.08	2268					6120	6360	6600	15200-15760	47	102	925	958	1218	14	

REF.	DIMENSION ⬟	MM	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT *5 | LUMEN .27	.30	.40	WATT	UPLIGHT ▲.UP *3 | LUMEN .27	.30	.40	WATT	DIMM ▼
10200	.03	863	●	.OP .MP	.HI	.9	4590	4767	4956	35	568	587	747	8	.DA*1 .PU .D1
	.04	1144					6120	6356	6608	47	851	880	1119	13	
	.05	1425					7650	7945	8260	59	1134	1173	1492	17	
	.06	1706					9180	9534	9912	71	1417	1466	1864	21	
	.07	1987					10710	11123	11564	83	1701	1760	2237	25	
	.08	2268					12240	12712	13216	94	1984	2053	2610	30	

Reference order | 10200.XX | .SR .PN | .XX.XX.XX.9.XX.XX.XX

COMPONENTS

COVERT KIT	REF.	FINISH
	TF13	●

Reference order | TF13 | .SR .PN | .XX

REDUGER	REF.	POWER
	ACC.RG	.ST .HI


Reference order | ACC.RG.XX

JOINTS


LINEAR JOINT

UR13 40 x52mm


OPTIONS (.PN)

SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA

SUSPENSION ROD	REF.	DIMENSIONS ⬟	mm	FINISH
	SC21	.60	600	●
		.80	800	
		.100	1000	

Reference order | SC21.XX.XX

CONNECTION BOX	FINISH
	●
CB09.12	

Reference order | CB09.12.XX

● Select finishes






WING

REF 10200.PN | 10200.SR

PHOTOMETRY




OPAL MICROPRISMATIC

INCLUDED (.PN)

SC03.SA
WIRE 3M.

PROFILE



*1 DALI protocol requires remote driver. *Protocolo DALI requiere driver en remoto.*
*2 Tunable White (.TW) values correspond to 2700K and 6500K - TW is only available for DALI dimmable (.DA), CRI 80 (.8) 700mA. *Los valores del blanco dinámico (.TW) corresponden a 2700K y 6500K. .TW solo está disponible con protocolo DALI (.DA), CRI 80 (.8) 700mA.*
*3 Uplight (.UP) is only available for ON-OFF and DALI dimmable (.DA) options, both in 24VdC. *La luz indirecta está solo disponible para versiones on-off y regulación DALI (.DA), ambas en 24VdC.*
*4 Uplight (.UP) Tunable White (.TW) is defaulted with remote control. When requested with DALI protocol (.DA), consult with the sales team. *La luz indirecta (.UP) en blanco dinámico (.TW) viene predeterminada con mando a distancia. Si se pide con protocolo DALI (.DA), consultar con el equipo comercial.*
*5 Down light (direct light) works at 500mA. *La luz directa trabaja a 500mA.*



FINISHES

● COLORS

DIMENSIONS

⬟ LENGTHS mm.

863 | 1144 | 1425 | 1706 | 1987 | 2268

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS


DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

2 x Suspension cables 3m (each 2m)
Diffuser
Connection Box

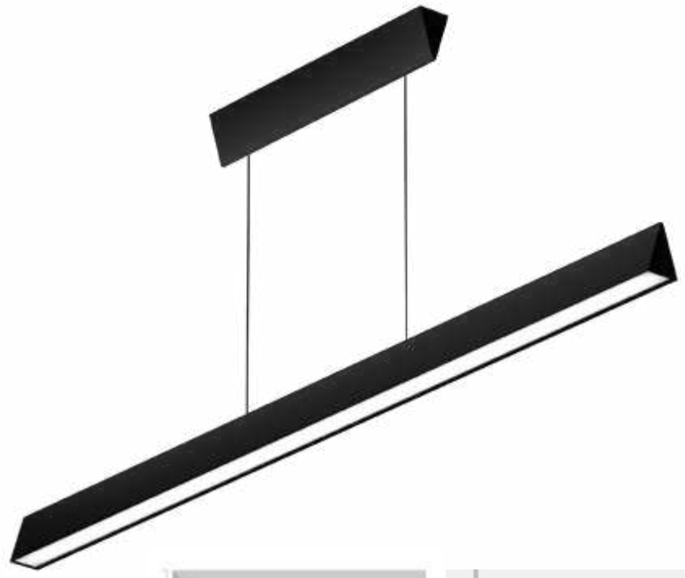





ON DEMAND


Emergency Lighting *
Motion Detection
Well-Certified LED Boards
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).

.PN

PENDANT

INSTALLATIONS



ALZIRA

REF 10169.PN




.PN
PENDANT

·10169 ALZIRA | PN
Pag. 175



.WS
WALL SURFACE

·10169 ALZIRA | WS
Pag. 175





REF.	DIMENSION ⬟	MM	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT *2 | LUMEN .27	.30	.40	.TW *1	WATT K	TW	DIMM ▼
10169	.03	863	●	.OP .MP	.ST	.9	2295	2385	2475	5700-5910	18	38	.DA .PU .D1
	.04	1144					3060	3180	3300	7600-7880	24	51	
	.05	1425					3825	3975	4125	9500-9850	30	64	
	.06	1706					4590	4770	4950	11400-11820	35	76	
	.07	1987					5355	5565	5775	13300-13790	41	89	
	.08	2268					6120	6360	6600	15200-15760	47	102	

REF.	DIMENSION ⬟	MM	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT *2 | LUMEN .27	.30	.40	WATT	DIMM ▼
10169	.03	863	●	.OP .MP	.HI	.9	4590	4767	4956	35	.DA .PU .D1
	.04	1144					6120	6356	6608	47	
	.05	1425					7650	7945	8260	59	
	.06	1706					9180	9534	9912	71	
	.07	1987					10710	11123	11564	83	
	.08	2268					12240	12712	13216	94	

Reference order | 10169.XX.PN.XX.XX.XX.9.XX.XX

COMPONENTS

COVERT KIT	REF.	FINISH
	TF14	●

Reference order | TF14.PN.XX

● Select finishes






ALZIRA


REF 10169.PN

PHOTOMETRY



OPAL MICROPRISMATIC


INCLUDED (.PN)



CONNECTION BOX

SC03.SA WIRE 3M.

PROFILE



*1 Tunable White (.TW) values correspond to 2700K and 6500K - .TW is only available for DALI dimmable (.DA), CRI 80 (.8) 700mA. *Los valores del blanco dinámico (.TW) corresponden a 2700K y 6500K. -.TW solo está disponible con protocolo DALI (.DA), CRI 80 (.8) 700mA.*

*2 Down light (direct light) works at 500mA. *La luz directa trabaja a 500mA.*



FINISHES

● COLORS

DIMENSIONS

⬟ LENGTHS mm.

863 | 1144 | 1425 | 1706 | 1987 | 2268

LIGHTING OPTIONS

■ DIFFUSERS

OPAL

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

.PN
2 x Suspension cables 3m (each 2m)
NON-DIM DOWN or DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
NON-DIM DOWN-UP or DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm²
Diffuser
.SR
Surface mounting kit

new





REMOTE

ON DEMAND

Emergency Lighting *
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).

.SR
.PN
PENDANT | SURFACE

INSTALLATIONS

ALUMINIUM PC | 0° | 0° | CRI ≥90 | IK06
IP20 IP40 | LIFE 50000H | DIM OPTIONAL | | REMOTE
INDOOR | | 220-240 V 50-60 Hz | CE

BUBBLE

REF 210010.PN | 210010.SR




.PN
PENDANT

·210010 BUBBLE | PN
Pag. 175

.SR
SURFACE


·210010 BUBBLE | SR
Pag. 175

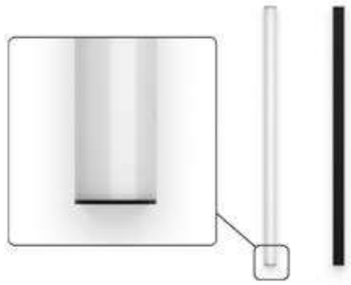



REF.	DIMENSION ⬟	MM	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT *1 | LUMEN .27	.30	.40	WATT K	DIMM ▼
210010	.03	868	●	.OP	.ST	.9	2295	2385	2475	18	.DA .PU .D1
	.04	1149					3060	3180	3300	24	
	.05	1430					3825	3975	4125	30	
	.06	1711					4590	4770	4950	35	
	.07	1992					5355	5565	5775	41	
	.08	2273					6120	6360	6600	47	

Reference order | 210010.XX ⬟ | .SR .PN | .XX ● .XX ■ .ST .9 .XX ▼ .XX






47

COMPONENTS

COVERT KIT	REF.	FINISH
	TF15	●

Reference order | TF15 | .SR .PN | ● .XX

BOXES

CONNECTION BOX FOR REMOTE DRIVER	DRIVER BOX NON-DIMM	DRIVER DRIVER BOX DIMMABLE	FINISH
			●
CB09.12	CB09.32	CB09.40	

Reference order | CBXXXX.XX ●

JOINTS


LINEAR JOINT

UR15 XXXXmm






OPTIONS (.PN)

SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA

- Select finishes





BUBBLE

REF 210010.PN | 210010.SR

PHOTOMETRY




OPAL

INCLUDED (.PN)

SC03.SA
WIRE 3M.

PROFILE



*1 Down light (direct light) works at 500mA. *La luz directa trabaja a 500mA.*



FINISHES

● PROFILE COLORS

● EYE COLORS

DIMENSIONS

⬟ LENGTHS mm.

1m,

LIGHTING OPTIONS

■ DIFFUSERS

ACRYLIC

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

▲ LIGHT DISTRIBUTION


DOWN

LUMINAIRE INCLUDES

.PN
2 x Suspension cables 3m (each 2m)
NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
.SR
Surface mounting kit

new



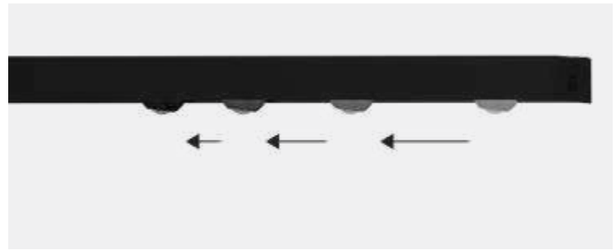



.SR
.PN
PENDANT | SURFACE

INSTALLATIONS

ALUMINIUM PC · 0° · 0° · CRI ≥90 · IK06 · IP20 IP40 · LIFE 50000H · DIM OPTIONAL · REMOTE · INDOOR · 220-240 V 50-60 Hz · CE

EYE


REF 210016.PN | 210016.SR




.PN
PENDANT
·210016 EYE|PN
Pag. 175

.SR
SURFACE
·210016 EYE|SR
Pag. 175

.TR
TRIMLESS
·210016 EYE|TR
Pag. 175






EYE	REF.	DIMEN-SION ⬟	FINISH	SKETCH
	**210006**	**.01 1m.**	**.BK-BK .WH-WH**	

POWER	DIMENSION ⬟	WATT
DR48	**.01**	75
	.02	120
	.03	200

Reference order 210006.XX ⬟ | .SR .PN ● | .XX ●


Reference order DR48.XX ⬟

EYE MODULE	REF.	DIMENSION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	LUMEN .27	LUMEN .30	LUMEN .40	WATT	VdC	DIMM ▼	SKETCH
	**20210**	**.01**	●	**.AC**	.ST	.9	XXX	XXX	XXX	5	48	-	


Reference order 20210.01.XX.AC.ST.9.XX ⬟ ● ■



OPTIONS (.PN)


SUSPENSION KIT	REF.	DIMEN-SION	FINISH
	**SC05**	**5M.**	**.SA**
	SC07	**7M.**	
	SC10	**10M.**	

Reference order SCXX.SA

SUSPENSION ROD	REF.	DIMEN-SIONS ⬟	mm	FINISH
	**SC21**	**.60**	600	●
		.80	800	
		.100	1000	

Reference order SC21.XX.XX ⬟ ●

BOXES (.PN)


CONNECTION BOX	FINISH
	●
CB09.12	

Reference order CB09.12.XX ●


COMPONENTS

COVERT KIT	REF.	FINISH
	TF16	●

Reference order TF16 | .SR .PN | .XX ●

LINEAR JOINT + FLEXIBLE JOINT CONNECTOR	FINISH ●
	**.BK-BK .WH-WH**

Reference order UR16.XX ●

POWER FEEDER UNIT	FINISH ●
	**.BK-BK .WH-WH**

ACC210016.CA.XX ●

.SR
.PN
PENDANT | SURFACE

● Select profile finishes



.WH-WH .BK-BK

● Select eye finishes



.WH-WH .BK-BK .GC-GC



EYE

REF 210016.PN | 210016.SR


PHOTOMETRY


OPAL

INCLUDED (.PN)

SC03.SA
WIRE 3M.

PROFILE



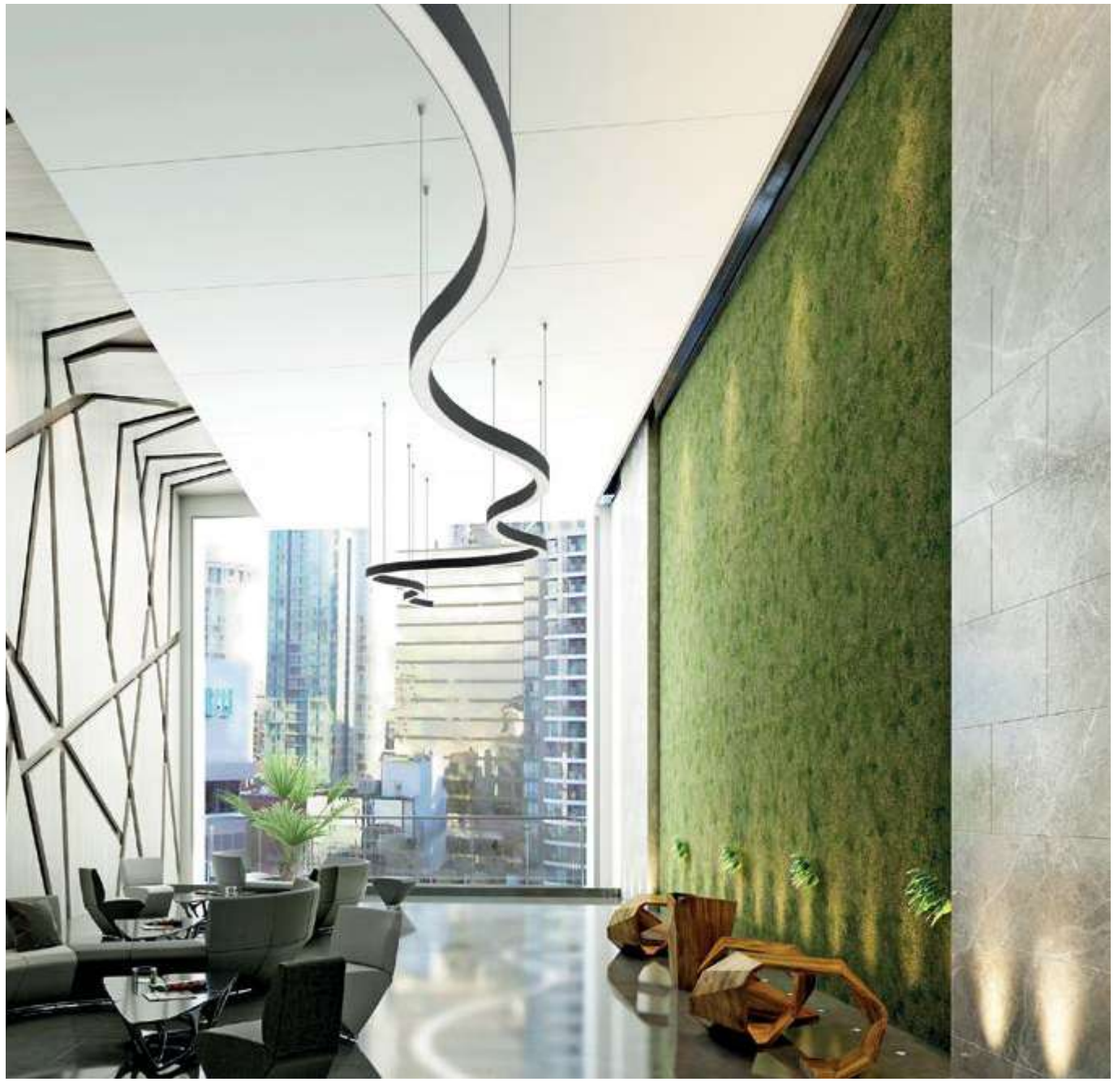

FINISHES

● COLORS

DIMENSIONS

⬟ LENGTHS mm.

863	1144	1425	1706
800	1520	2950	5100

LIGHTING OPTIONS

■ DIFFUSERS

OPAL

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH


▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

.PN
2 x Suspension cables 3m (each 2m or each shape)
NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
DIM DOWN: 1 x Feed Hose 5 x 0,75mm²
Diffuser
.SR
Surface mounting kit

new

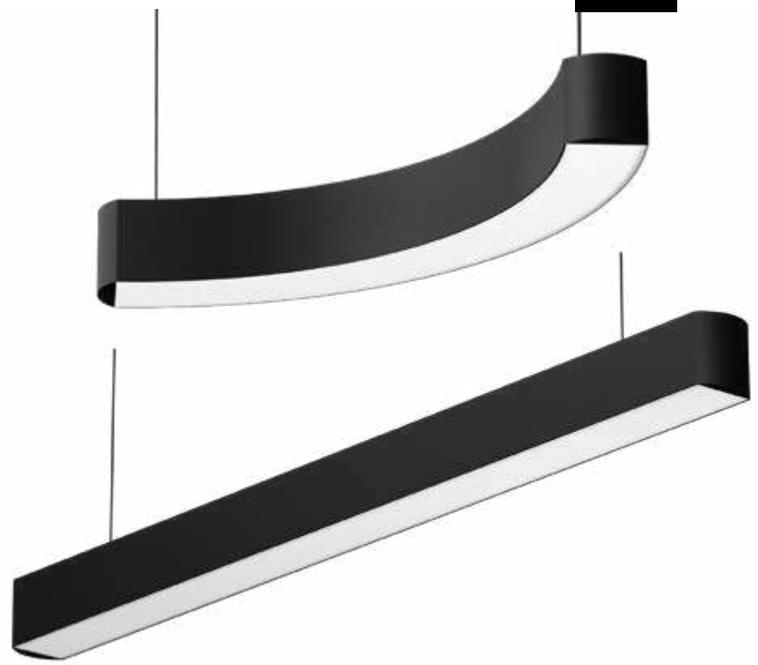

ON DEMAND


Emergency Lighting *
Motion Detection
Well-Certified LED Boards
Taylor your own design
Special Color Temperature
RGB
Wireless Control Options (Casambi)

* Delivered separately
(not installed in luminaire).

.SR
.PN
PENDANT | SURFACE

BOLD | BOLD LINE

REF 210001.PN | 210015.PN | 210001.SR | 210015.SR



INSTALLATIONS



.PN
PENDANT


·210001 BOLD ·210015 BOLD LINE | PN
Pag. 175

.SR
SURFACE

·210001 BOLD ·210015 BOLD LINE | SR
Pag. 175

.RF
RECESSED FRAME

·210001 BOLD ·210015 BOLD LINE |RF
Pag. 175

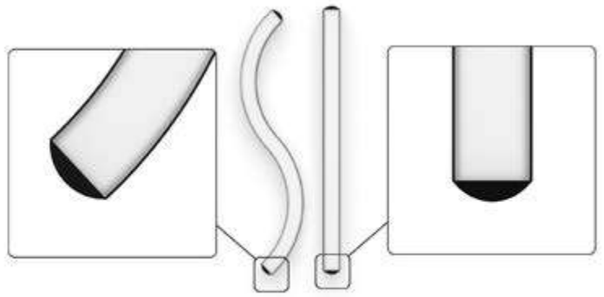



BOLD						
.01 800 mm | 45º	**.02** 800 mm | 90º	**.03** 1520 mm | 45º	**.04** 1520 mm | 90º	**.05** 2950 mm | 45º	**.06** 2950 mm | 90º	**.07** 5100 mm | 45º
						

REF.	DIMENSION ⬟	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT *1 | LUMEN .27	.30	.40	WATT	DIMM ▼
210001	.01	●	.OP	.ST	.9	765	795	825	6	.DA .PU .D1
	.02					1530	1590	1650	12	
	.03					1530	1590	1650	12	
	.04					3060	3180	3300	24	
	.05					3060	3180	3300	24	
	.06					6120	6360	6600	47	
	0.7					5355	5565	5775	41	

REF.	DIMENSION ⬟	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT *1 | LUMEN .27	.30	.40	WATT	DIMM ▼
210001	.01	●	.OP	.HI	.9	1530	1589	1652	12	.DA .PU .D1
	.02					3060	3178	3304	24	
	.03					3060	3178	3304	24	
	.04					6120	6356	6608	47	
	.05					6120	6356	6608	47	
	.06					12240	12712	13216	94	
	0.7					10710	11123	11564	83	

Reference order | 210001.XX | .SR .PN | .XX.XX.XX.9.XX.XX

BOLD LINE	REF.	DIMENSION ⬟	MM	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT *1 | LUMEN .27	.30	.40	WATT K	DIMM ▼
	210015	.03	863	●	.OP .MP	.ST	.9	2295	2385	2475	18	.DA .PU .D1
		.04	1144					3060	3180	3300	24	
		.05	1425					3825	3975	4125	30	
		.06	1706					4590	4770	4950	35	


BOLD LINE	REF.	DIMENSION ⬟	MM	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT *1 | LUMEN .27	.30	.40	WATT K	DIMM ▼
	210015	.03	863	●	.OP .MP	.ST	.9	4590	4767	4956	35	.DA .PU .D1
		.04	1144					6120	6356	6608	47	
		.05	1425					7650	7945	8260	59	
		.06	1706					9180	9534	9912	71	

Reference order | 210015.XX | .SR .PN | .XX.XX.XX.9.XX.XX

COMPONENTS

COVERT KIT	REF.
	CK18

Reference order | CK18.PN.XX

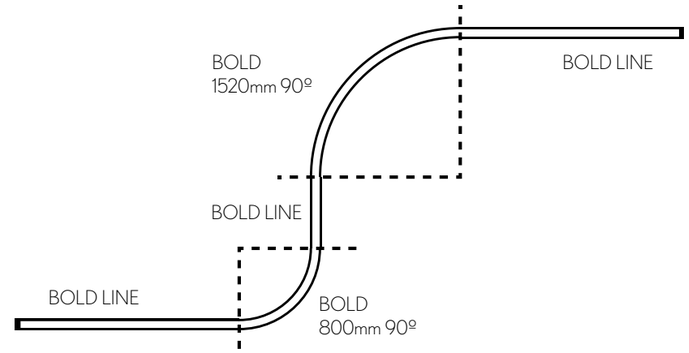

● Select finishes




.WH-WH .BK-BK



BOLD | BOLD LINE

REF 210001.PN | 210015.PN | 210001.SR | 210015.SR

PHOTOMETRY





OPAL

INCLUDED (.PN)

SC03.SA
WIRE 3M.

PROFILE



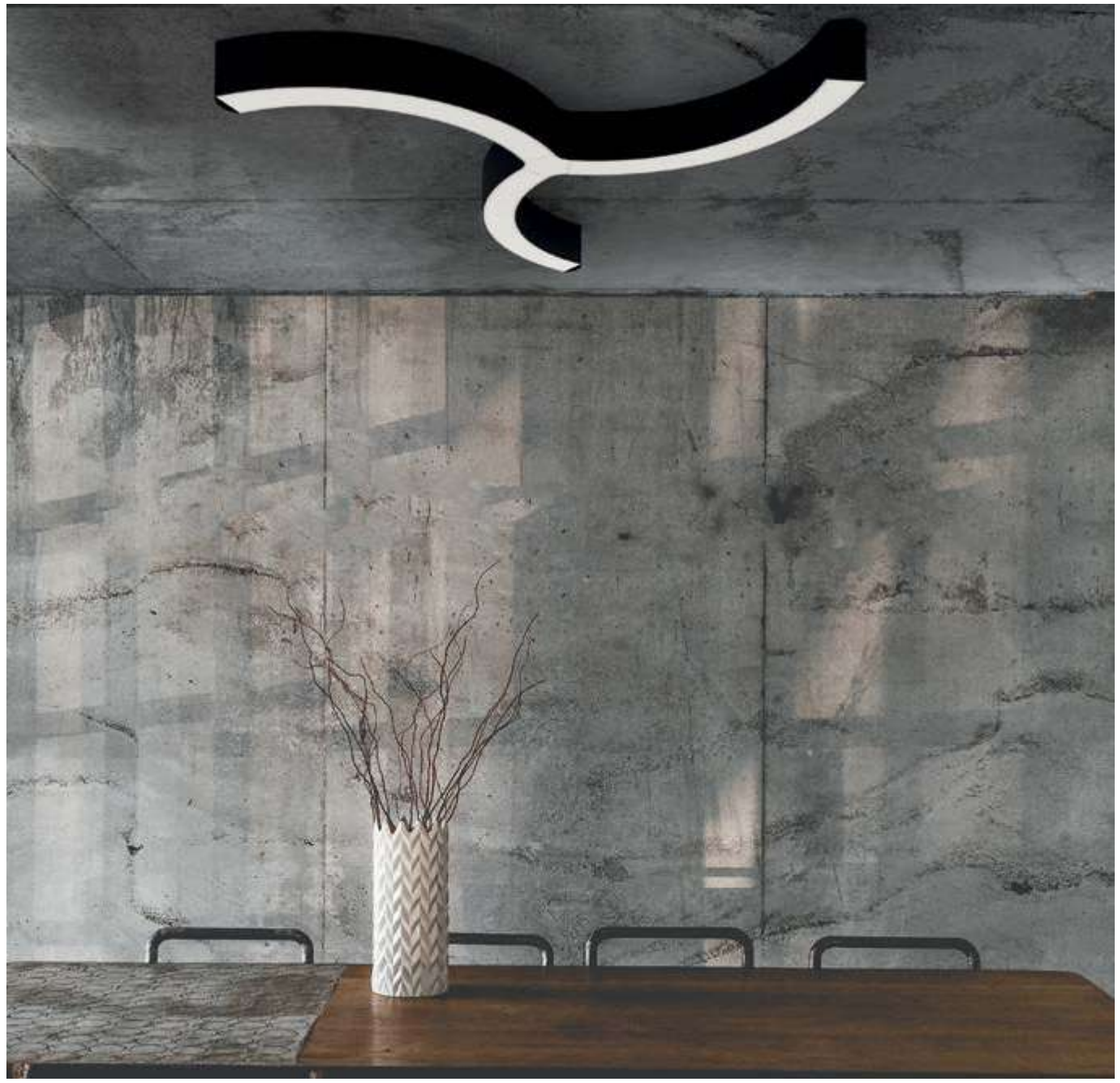

FINISHES

● COLORS

DIMENSIONS

⬟ LENGTHS

.01

LIGHTING OPTIONS

■ DIFFUSERS

OPAL

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH


▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

.PN
4 x Suspension cables 3m
NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
DIM DOWN : 1 x Feed Hose 5 x 0,75mm²
Diffuser
.SR
Surface mounting kit

new

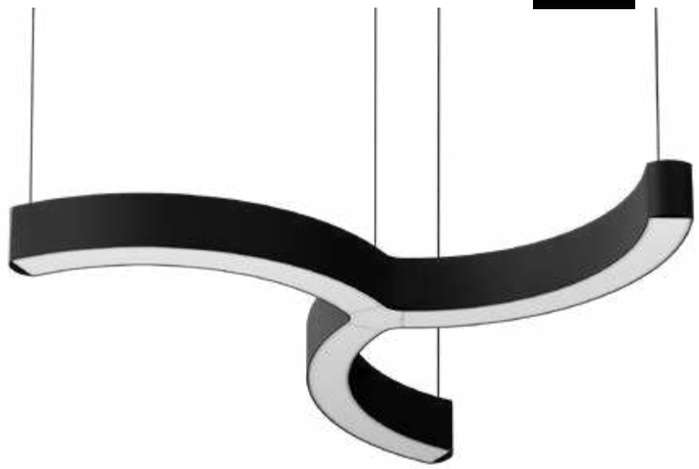

ON DEMAND

Emergency Lighting *
Motion Detection
Wireless Control Options (Casambi)

* Delivered separately
(not installed in luminaire).

.SR
.PN
PENDANT | SURFACE

TRIBOLD

REF 210018.PN | 210018.SR

INSTALLATIONS








.PN
PENDANT


·210018 TRIBOLD | PN
Pag. 175

.SR
SURFACE

·210018 TRIBOLD | SR
Pag. 175



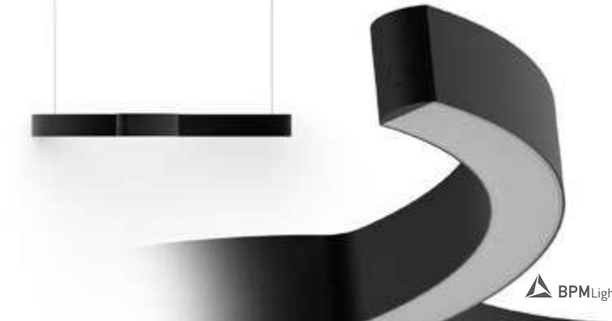

TRIBOLD	REF.	DIMENSION ⬟	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT *1 | LUMEN .27	.30	.40	WATT K	DIMM ▼	SKETCH
	210018	.01	●	.OP	.ST	.9	4781	4969	5156	37	.DA .PU .D1	 85 Ø 1143
					.HI		9563	9931	10325	74		

Reference order | 210018.XX | .SR .PN | .XX.OP.XX.9.XX.XX

COMPONENTS

COVERT KIT	REF.	FINISH
	TF17	●

Reference order | TF17 | .SR .PN | ● .XX



● Select finishes



.WH-WH .BK-BK



TRIBOLD

REF 210018.PN | 210018.SR

PHOTOMETRY




OPAL

INCLUDED (.PN)

SC03.SA
WIRE 3M.

PROFILE



*1 Uplight (.UP) only for ON-OFF and DALI dimmable (.DA) options.
*2 Tunable White (.TW) must be DALI dimmable (.DA). Only CRI 80. 700mA



FINISHES

● COLORS

DIMENSIONS

⬟ LENGTHS

PER METER

COMPONENTS

PATRICIA
LED MODULES
LENSES

POWER

STANDARD

CRI

90

COLOR TEMPERATURE


2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI

▲ LIGHT DISTRIBUTION

DOWN

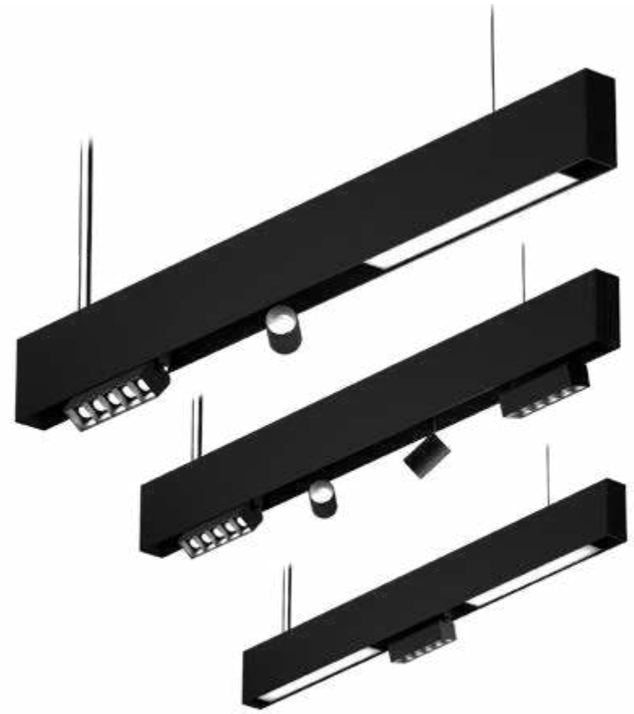

LUMINAIRE INCLUDES


.PN
Suspension cables
NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
DIM DOWN: 1 x Feed Hose 5 x 0,75mm²
.SR
Surface mounting kit

MAGNET

ON DEMAND
Taylor your own design

ALARIK

REF 10225.PN | 10225.SR

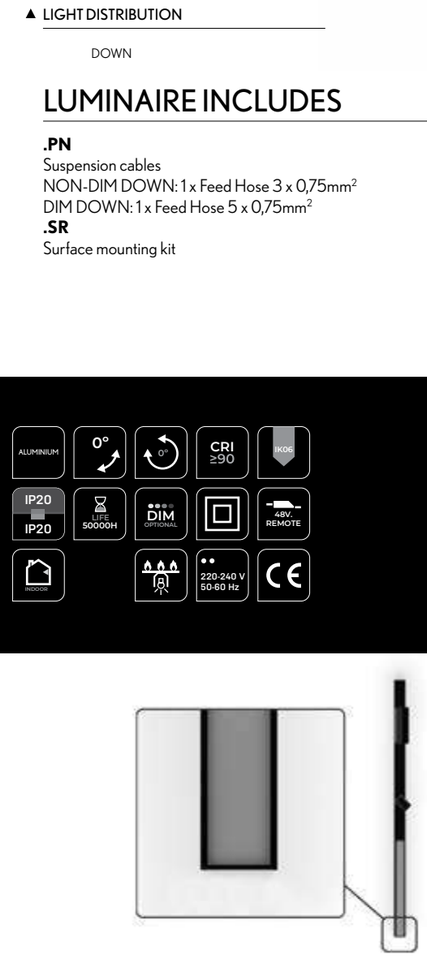

INSTALLATIONS



.PN
PENDANT


·10225 ALARIK | PN
Pag. 175


.SR
SURFACE

·10225 ALARIK | SR
Pag. 175

.TR
TRIMLESS

·10225 ALARIK | TR
Pag. 175


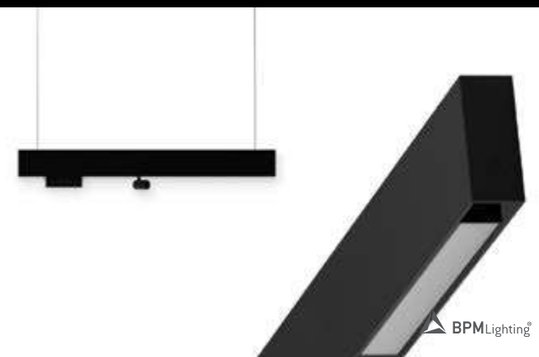


ALARIK	REF.	DIMEN-SION ⬟	FINISH ●	SKETCH
	10225	.01 1m	●	


POWER	DIMENSION ⬟	WATT
DR48	.01	75
	.02	120
	.03	200

Reference order | 10225.XX ⬟ | .SR .PN ● | .XX




Reference order | DR48.XX ⬟

PATRICIA S	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K ▼	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	20146	.01	●	.15 .24 .38	.ST	.9	.27	576	8	48	.DA	
							.30	607				
							.40	695				



Reference order | 20146.XX.XX.XX.ST.9.XX.XX ⬟ ● ■ ▼

PATRICIA M	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K ▼	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	20193	.01	●	.15 .24 .38	.ST	.9	.27	1173	13	48	.DA	
							.30	1181				
							.40	1207				

Reference order | 20193.XX.XX.XX.ST.9.XX.XX ⬟ ● ■ ▼

LED MODULES	REF.	DIMEN-SION ⬟	FINISH ●	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	11542	.01	.BK-BK	.OP	.ST	.9	.27	765	6	48	.DA	
							.30	795				
							.40	825				
	11542	.02	.BK-BK	.OP	.ST	.9	.27	1530	12	48	.DA	
							.30	1590				
							.40	1650				
	11542	.03	.BK-BK	.OP	.ST	.9	.27	2295	18	48	.DA	
							.30	2385				
							.40	2475				

Reference order | 11542.XX.XX.XX.ST.9.XX.XX ⬟ ● ■ ▼

LENSES	REF.	DIMEN-SION ⬟	SHAPE ◗	FINISH ●	OPTIC OP. ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	11534	.05	.RO .SQ	.BK-BK	.20 .40 .60	.ST	.9	.27	660	10	48	.DA	
								.30	750				
								.40	827				
	11534	.05F	.RO .SQ	.BK-BK	.20 .40 .60	.ST	.9	.27	660	10	48	.DA	
								.30	750				
								.40	827				


ROUND .RO
26x29,3 mm
Int Ø14,5 - Ext. Ø23 mm


SQUARE .SQ
26x29,3 mm
Ø14,5 mm

Reference order | 11534.XX.XX.XX.XX.ST.9.XX.XX ⬟ ◗ ● ■ ▼

● Select finishes

.WH-WH .BK-BK



ALARIK

REF 10225.PN | 10225.SR


PHOTOMETRY
PATRICIA


15º 24º 38º


PHOTOMETRY
LENSES


20º 40º 60º

PHOTOMETRY
LED MODULES



OPAL MICROPRISMATIC

INCLUDED (.PN)


SB09.12
CONNECTION BOX

SC03.SA
WIRE 3M.

PROFILE



COMPONENTS

COVERT KIT	REF.	FINISH
	TF18	●

Reference order | TF18 | .SR .PN | ● .XX

OPTIONS (.PN)

SUSPENSION KIT	REF.	DIMEN-SION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA



JOINTS

LINEAR JOINT	ANGLE JOINT	T-JOINT	CROSS JOINT	ROOF-WALL JOINT	FINISH
		X	X	X	●
UR18 XX x XX	**UL18** XX x XX	X	X	X	

***** Each joint requires an additional driver to that of the luminaire. *Cada unión requiere de un driver adicional al de la luminaria.*

Reference order | XX18 | .SR .PN | ● .XX

BOXES (.PN)

DRIVER BOX		FINISH
		●
CB06.40	**Cb08.38**	

Reference order | ● XXXX.XX



PENDANT | SURFACE

.SR

.PN

● Select finishes




.WH-WH .BK-BK



ALARIK

REF 10225.PN | 10225.SR


INCLUDED (.PN)



SB09.12
CONNECTION BOX

SC03.SA
WIRE 3M.

PROFILE





Mastering light has never been so easy

It's playtime! Lighting design with Alarik family is an exercise of creativity. Freedom, functionality, uniqueness... In short, unbridled flexibility and total control over the final result.

Jugar con luz nunca ha sido tan fácil

¡Que empiece el juego! Iluminar con la familia Alarik es lo más parecido a un ejercicio de ingenio. Libertad, funcionalidad, singularidad... en definitiva, diseño sin ataduras y siempre con el control absoluto del resultado a obtener.

ALARIK SLIM



FINISHES

● COLORS

DIMENSIONS

⬟ LENGTHS

PER METER

COMPONENTS

SLIM PATRICIA
SLIM LED BALL
SLIM TUBE
SLIM WALL WASHER
SLIM LENSES
SLIM MOTION LENSES
SLIM LED MODULES

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10


▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

.PN
2 x Suspension cables 3m
.SR
Surface mounting kit

new

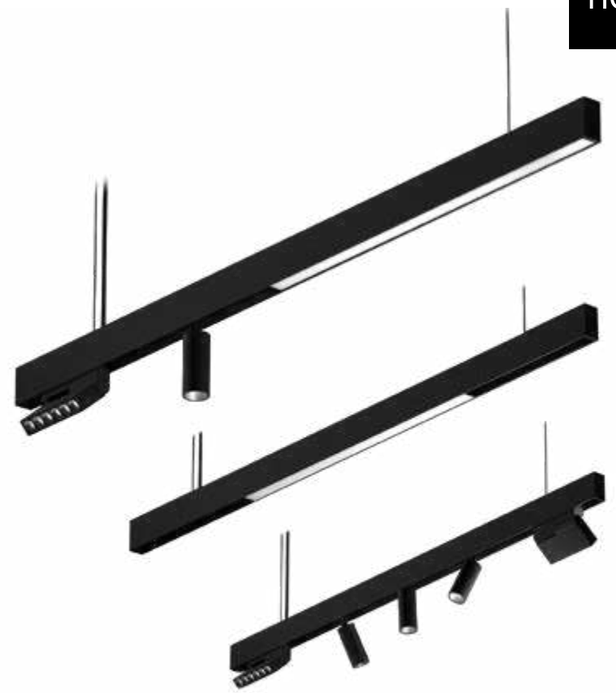

MAGNET

ON DEMAND
Taylor your own design

.SR
.PN
PENDANT | SURFACE

ALARIK
SLIM

REF 20224.PN | 20224.SR

INSTALLATIONS

ALUMINIUM · 0° · 0° · CRI ≥90 · IK08 · IP20 IP20 · LIFE 50000H · DIM OPTIONAL · 48V. REMOTE · INDOOR · 220-240 V 50-60 Hz · CE



.PN
PENDANT

·20224 ALARIK SLIM | PN
Pag. 175

.SR
SURFACE

·20224 ALARIK SLIM | SR
Pag. 175


.RF
RECESSED FRAME


·20224 ALARIK SLIM | RF
Pag. 175

.TR
TRIMLESS

·20224 ALARIK SLIM | TR
Pag. 175



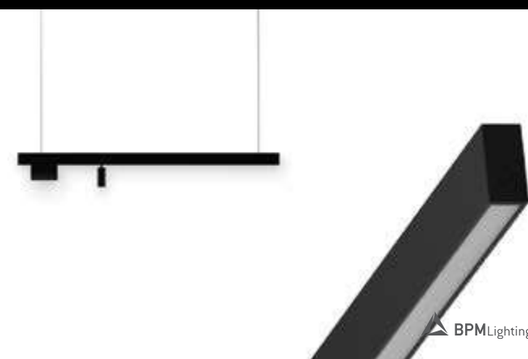

ALARIK SLIM	REF.	DIMEN-SION ⬟	FINISH ●	SKETCH
	20224	.01 1 m	●	

Reference order | 20224.XX ⬟ | .SR .PN ● | .XX

POWER	DIMENSION ⬟	WATT
DR48	.01	75
	.02	120
	.03	200


Reference order | DR48.XX ⬟

INTEGRATED POWER	REF.	WATT
	10246.DR (404x43x22mm)	200W

Reference order | 10246.DR

SLIM PATRICIA	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	11544	.01	●	.15 .38 .60	.ST	.9	.27	576	8	48	.DA .D1	
							.30	607				
							.40	695				
	11544	.02	●	.15 .38 .60	.ST	.9	.27	1173	15	48	.DA .D1	
							.30	1181				
							.40	1207				

Reference order | 11544.XX.XX.XX ⬟ | ● | ■ | ▼ | .ST.9.XX.XX

SLIM PATRICIA ZOOM	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	11546	.03	●	.15-36 .36-60	.ST	.9	.27	2038	25	48	.DA .D1	
							.30	2254				
							.40	2320				


Reference order | 11546.XX.XX.XX ⬟ | ● | ■ | ▼ | .ST.9.XX.XX

SLIM LED BALL	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	11551	.01	.BK-BK .WH-WH	.37	.ST	.9	.27	760	8	48	.DA .D1	
							.30	808				
							.40	848				



Reference order | 11551.XX.XX.XX ⬟ | ● | ■ | ▼ | .ST.9.XX.XX

SLIM LED TUBE	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VaC	DIMM ▼	SKETCH
	11552	.01 Ø40 x 40	●	.20 .40	.ST	.9	.27	808	14	48	.DA .D1	
							.30	820				
							.40	881				
	11552	.02 Ø60 x 60	●	.20 .40	.ST	.9	.27	1662	21	48	.DA .D1	
							.30	1716				
							.40	1729				

Reference order | 11552XX.XX.XX ⬟ | ● | ■ | ▼ | .ST.9.XX.XX

SLIM WALL WASHER	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VaC	DIMM ▼	SKETCH
	11550	.01	.BK-BK	-	.ST	.9	.27	1100	15	48	.DA .D1	
							.30	1169				
							.40	1251				

Reference order | 11550.XX.XX.XX ⬟ | ● | ■ | ▼ | .ST.9.XX.XX

SLIM LENSES	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VaC	DIMM ▼	SKETCH
	11548	.01	.BK-BK	.15 .38	.ST	.9	.27	660	8	48	.DA .D1	
							.30	750				
							.40	827				
	11548	.02	.BK-BK	.15 .38	.ST	.9	.27	1320	15	48	.DA .D1	
							.30	1511				
							.40	1654				

Reference order | 11548.XX.XX.XX ⬟ | ● | ■ | ▼ | .ST.9.XX.XX

● Select finishes





ALARIK
SLIM

REF 20224.PN | 20224.SR

PHOTOMETRY

SLIM PATRICIA



15º 36º 38º 60º

PHOTOMETRY

SLIM LED BALL SLIM WALL WASHER



XXº XXº


PHOTOMETRY

SLIM TUBE | SLIM LENSES



20º 40º


INCLUDED (.PN)




SB09.12 CONNECTION BOX



SC03.SA WIRE 3M.

PROFILE



SLIM MOTION LENSES	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VaC	DIMM ▼	SKETCH
	11547	.01	.BK-BK	.15 .38	.ST	.9	.27	660	8	48	.DA .D1	
							.30	750				
							.40	827				

Reference order | 11547.XX.XX.XX.ST.9.XX.XX


SLIM LED MODULES	REF.	DIMEN-SION ⬟	FINISH ●	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	VaC	DIMM ▼	SKETCH
	11549	.01	.BK-BK	.OP	.ST	.9	.27	558	9	48	.DA .D1	
							.30	560				
							.40	604				
	11549	.02	.BK-BK	.OP	.ST	.9	.27	1115	18	48	.DA .D1	
							.30	1120				
							.40	1208				
	11549	.03	.BK-BK	.OP	.ST	.9	.27	1670	24	48	.DA .D1	
							.30	1680				
							.40	1812				

Reference order | 11549.XX.XX.XX.ST.9.XX.XX


COMPONENTS

COVERT KIT	REF.	FINISH
	TF19	●

Reference order | TF19 | .SR .PN | .XX




SUSPENSION KIT	REF.
	ACC20224.SC


Reference order | ACC20224.SC





SUSPENSION KIT WITH DRIVER BOX	REF.
	ACC20224.PKDB

Reference order | ACC20224.PKDB





JOINTS & CONNECTORS

LINEAR JOINT	ANGLE JOINT	ROOF-WALL JOINT
		
UR19	UL19	UV19

POWER FEEDER UNIT

ACC20224.CA

CURVE JOINT KIT *1	REF.	DIMEN-SION ⬟	DEGREE ■	FINISH ●	SKETCH
	ACC.20224	.01	.45 45º	.BK-BK .WH-WH	
		.02			
		.03			

Reference order | ACC20224.XX.45.XX

CURVE JOINT KIT *1	REF.	DIMEN-SION ⬟	DEGREE ■	FINISH ●	SKETCH
	ACC.20224	.01	.90 90º	.BK-BK .WH-WH	
		.02			
		.03			

Reference order | ACC20224.XX.90.XX

*1 LED components can not be instaled in curve joints. Los componentes LED no se pueden instalar en las uniones curvas.

- Select finishes



.WH-WH .BK-BK



ALARIK
SLIM

REF 20224.PN | 20224.SR

PHOTOMETRY


SLIM MOTIONLENSES



15º 38º

PHOTOMETRY

SLIM LED MODULES



OPAL

JOINTS CONNECTORS



LINEAR JOINT CONNECTOR



FLEXIBLE JOINT CONNECTOR



POWER FEEDER UNIT



FINISHES

● COLORS

DIMENSIONS

⬟ LENGTHS

PER METER

COMPONENTS

SLIM PATRICIA
SLIM MODULES
SLIM LENSES
SLIM MOTION LENSES
SLIM WALL WASHER

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

.PN
2 x Suspension cables 3m
.SR
Surface mounting kit



new

MAGNET

ON DEMAND
Taylor your own design

PENDANT | SURFACE

INSTALLATIONS



ALARIK
SLIM ROUND

REF 210019.PN | 210019.SR




.PN
PENDANT

·210019 ALARIK SLIM ROUND | PN
Pag. 175

.SR
SURFACE

·210019 ALARIK SLIM ROUND | SR
Pag. 175



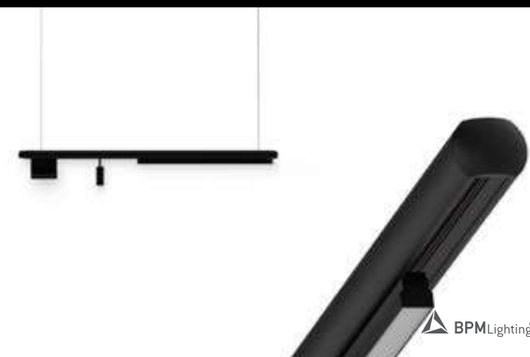

ALARIK SLIM ROUND	REF.	DIMENSION ⬟	FINISH	SKETCH
	210019	.01 1 m	●	

Reference order | 210019.XX ⬟ | .SR .PN | ● .XX

POWER	DIMENSION ⬟	WATT
DR48	.01	75
	.02	120
	.03	200


Reference order | DR48.XX ⬟

INTEGRATED POWER	REF.	WATT
	10246.DR	200W


Reference order | 10246.DR

SLIM PATRICIA	REF.	DIMENSION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	11544	.01	●	.15 .38 .60	.ST	.9	.27	576	8	48	.DA .D1	
							.30	607				
							.40	695				
	11544	.02	●	.15 .38 .60	.ST	.9	.27	1173	15	48	.DA .D1	
							.30	1181				
							.40	1207				

Reference order | 11544.XX.XX.XX.ST.9.XX.XX ⬟ ● ■ ▼

SLIM PATRICIA ZOOM	REF.	DIMENSION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	11546	.03	●	.15-36 .36-60	.ST	.9	.27	2038	25	48	.DA .D1	
							.30	2254				
							.40	2320				


Reference order | 11546.XX.XX.XX.ST.9.XX.XX ⬟ ● ■ ▼

SLIM LED BALL	REF.	DIMENSION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	11551	.01	●	.37	.ST	.9	.27	760	8	48	.DA .D1	
							.30	808				
							.40	848				



Reference order | 11551.XX.XX.XX.ST.9.XX.XX ⬟ ● ■ ▼

SLIM TUBE	REF.	DIMENSION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VaC	DIMM ▼	SKETCH
	11552	.01 Ø40 x 40	●	.20 .40	.ST	.9	.27	808	14	48	.DA .D1	
							.30	820				
							.40	881				
	11552	.02 Ø60 x 60	●	.20 .40	.ST	.9	.27	1662	21	48	.DA .D1	
							.30	1716				
							.40	1729				

Reference order | 11552XX.XX.XX.ST.9.XX.XX ⬟ ● ■ ▼

SLIM WALL WASHER	REF.	DIMENSION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VaC	DIMM ▼	SKETCH
	11550	.06	.BK-BK	-	.ST	.9	.27	1100	15	48	.DA .D1	
							.30	1169				
							.40	1251				

Reference order | 11550.XX.XX.XX.ST.9.XX.XX ⬟ ● ■ ▼

SLIM LENSES	REF.	DIMENSION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VaC	DIMM ▼	SKETCH
	11548	.06	.BK-BK	.15 .38	.ST	.9	.27	660	8	48	.DA .D1	
							.30	750				
							.40	827				
	11548	.12	.BK-BK	.15 .38	.ST	.9	.27	1320	15	48	.DA .D1	
							.30	1511				
							.40	1654				

Reference order | 11548.XX.XX.XX.ST.9.XX.XX ⬟ ● ■ ▼

● Select finishes



.WH-WH .BK-BK



ALARIK
SLIM ROUND

REF 210019.PN | 210019.SR

PHOTOMETRY

SLIM PATRICIA



15º 36º 38º 60º

PHOTOMETRY

SLIM LED BALL SLIM WALL WASHER



XXº XXº


PHOTOMETRY

SLIM TUBE | SLIM LENSES



15º 38º


INCLUDED (.PN)




SB09.12 CONNECTION BOX




SC03.SA WIRE 3M.

PROFILE



SLIM MOTION LENSES	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VaC	DIMM ▼	SKETCH
	11547	.06	.BK-BK	.15 .38	.ST	.9	.27	660	8	48	.DA .D1	
							.30	750				
							.40	827				

Reference order | 11547.XX.XX.XX.ST.9.XX.XX


SLIM LED MODULES	REF.	DIMEN-SION ⬟	FINISH ●	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	VaC	DIMM ▼	SKETCH
	11549	.01	.BK-BK	.OP	.ST	.9	.27	558	9	48	.DA .D1	
							.30	560				
							.40	604				
	11549	.02	.BK-BK	.OP	.ST	.9	.27	1115	18	48	.DA .D1	
							.30	1120				
							.40	1208				
	11549	.03	.BK-BK	.OP	.ST	.9	.27	1670	24	48	.DA .D1	
							.30	1680				
							.40	1812				

Reference order | 11549.XX.XX.XX.ST.9.XX.XX


COMPONENTS

COVERT KIT	REF.	FINISH
	TF20	●

Reference order | TF20 | .SR / .PN | .XX



SUSPENSION KIT	REF.
	ACC210019.SC


Reference order | ACC210019.SC

SUSPENSION KIT WITH DRIVER BOX	REF.
	ACC210019.PKDB

Reference order | ACC210019.PKDB

JOINTS & CONNECTORS

LINEAR JOINT	ANGLE JOINT	ROOF-WALL JOINT
		X
UR20	UL20	X

POWER FEEDER UNIT

ACC210019.CA



- Select finishes



.WH-WH .BK-BK



ALARIK
SLIM ROUND

REF 210019.PN | 210019.SR

PHOTOMETRY


SLIM MOTIONLENSES



15º 38º

PHOTOMETRY

SLIM LED MODULES



OPAL

JOINTS CONNECTORS




LINEAR JOINT CONNECTOR



FLEXIBLE JOINT CONNECTOR



POWER FEEDER UNIT

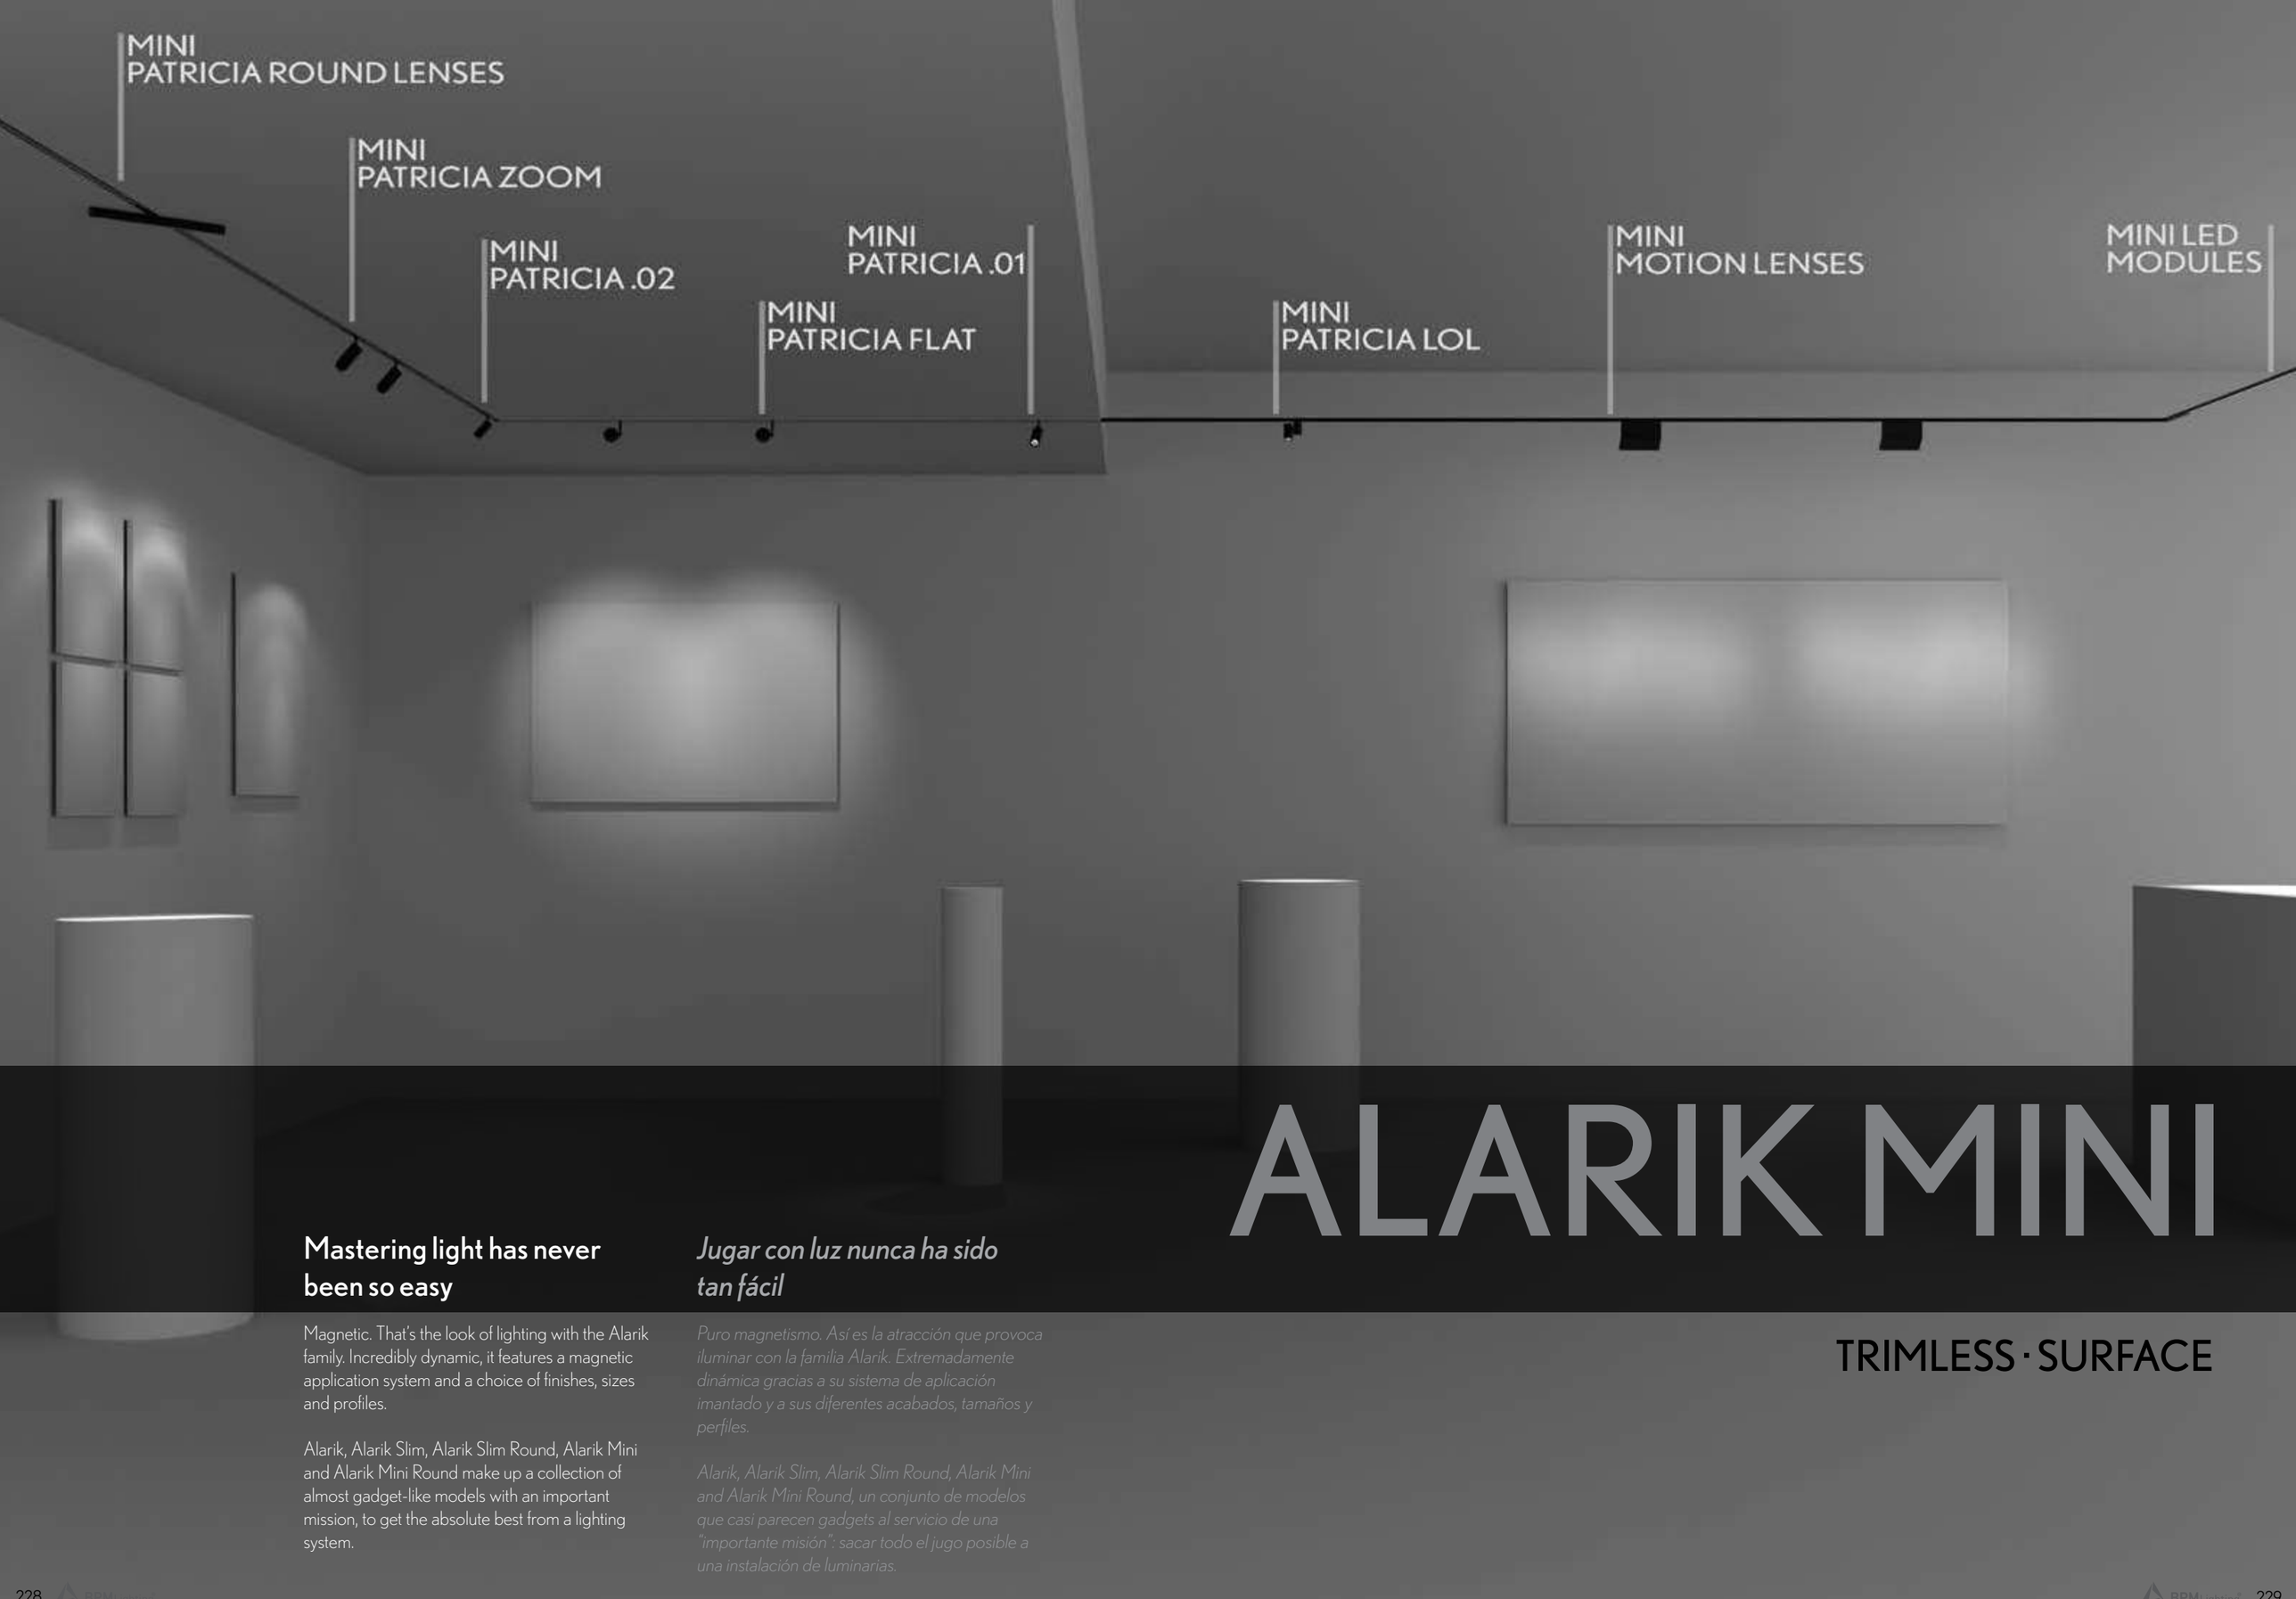

ALARIK MINI

TRIMLESS · SURFACE

Mastering light has never been so easy


Magnetic. That's the look of lighting with the Alarik family. Incredibly dynamic, it features a magnetic application system and a choice of finishes, sizes and profiles.

Alarik, Alarik Slim, Alarik Slim Round, Alarik Mini and Alarik Mini Round make up a collection of almost gadget-like models with an important mission, to get the absolute best from a lighting system.

Jugar con luz nunca ha sido tan fácil

Puro magnetismo. Así es la atracción que provoca iluminar con la familia Alarik. Extremadamente dinámica gracias a su sistema de aplicación imantado y a sus diferentes acabados, tamaños y perfiles.

Alarik, Alarik Slim, Alarik Slim Round, Alarik Mini and Alarik Mini Round, un conjunto de modelos que casi parecen gadgets al servicio de una "importante misión": sacar todo el jugo posible a una instalación de luminarias.

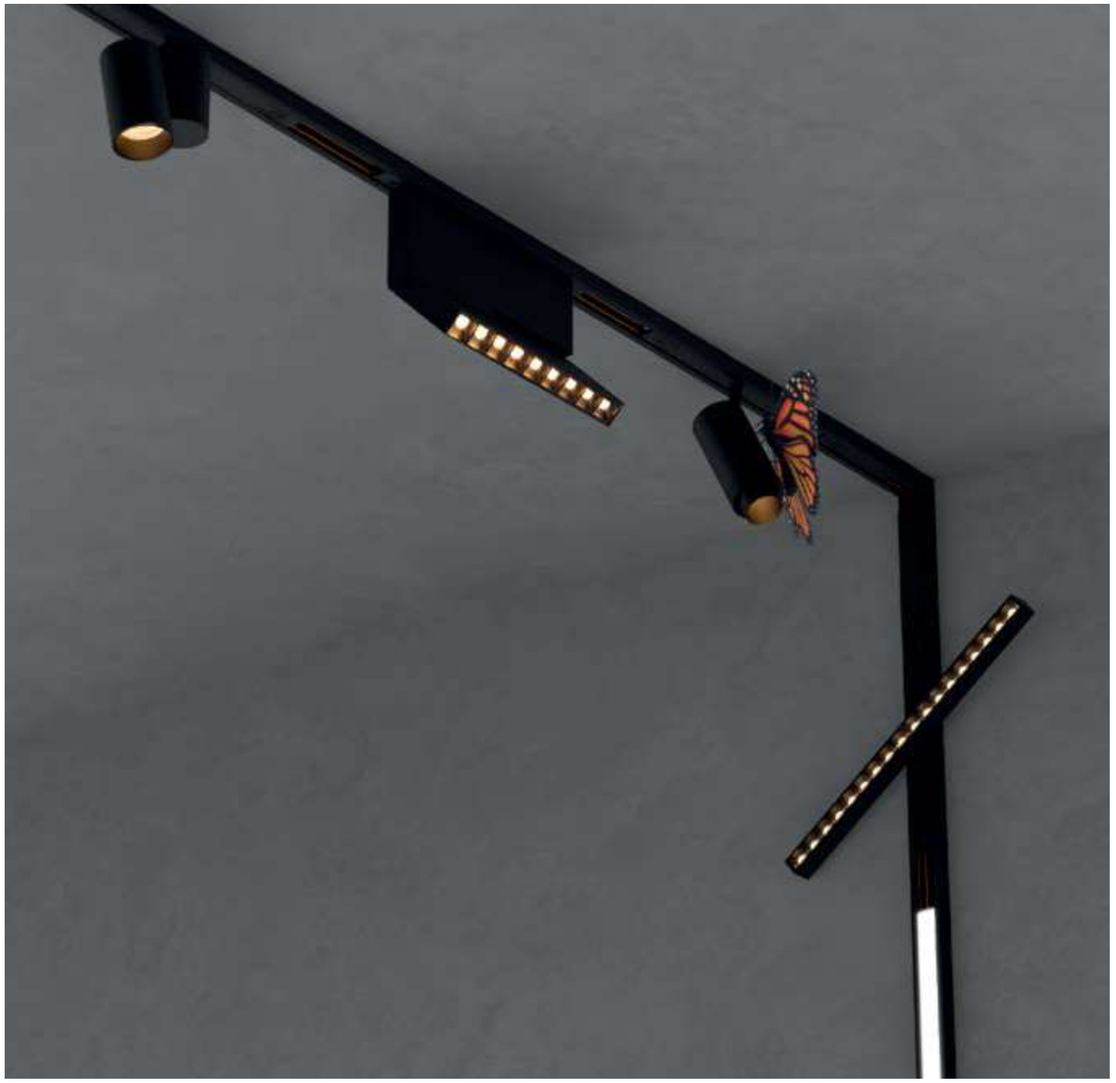

FINISHES

● COLORS

DIMENSIONS

● LENGTHS

PER METER

COMPONENTS

MINI PATRICIA
MINI PATRICIA LOL
MINI PATRICIA ZOOM
MINI MOTION LENSES
MINI LENSES
MINI LED MODULES
MINI PATRICIA FLAT
MINI PATRICIA ROUND LENSES

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS


-

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

.PN
2 x Suspension cables 2m
.SR
Surface mounting kit

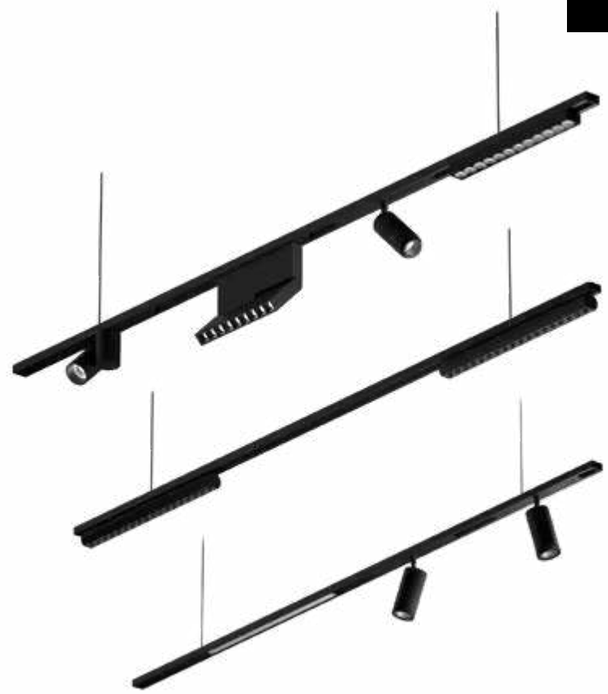

MAGNET

ON DEMAND
Taylor your own design

new

.SR
.PN
PENDANT | SURFACE

INSTALLATIONS



ALARIK
MINI

REF 210006.PN | 210006.SR



.PN
PENDANT

·210006 ALARIK MINI | PN
Pag. 175




.SR
SURFACE

·210006ALARIK MINI | SR
Pag. 175

.TR
TRIMLESS

·210006 ALARIK MINI | TR
Pag. 175








ALARIK MINI		DIMEN-SION ⬟	FINISH ●	SKETCH
	210006	.01 1m	●	



Reference order | 210006.XX | .SR .PN | .XX

POWER	DIMENSION ⬟	WATT
DR48	.01	75
	.02	120
	.03	200


Reference order | DR48.XX

POWER FEEDER	REF.	FINISH ●	SKETCH
	ACC21006.CA	.BK-BK .WH-WH	


Reference order | ACC21006.CA.XX

MINI PATRICIA	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	450001	.01	●	.15 .30 .36	.ST	.9	.27	519	5	48	-	
							.30	557				
							.40	583				
	450001	.02	●	.15 .24 .36	.ST	.9	.27	1173	8	48	-	
							.30	1181				
							.40	1207				

Reference order | 450001.XX.XX.XX.ST.9.XX.XX

MINI PATRICIA LOL	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	450002	.01	●	.36	.ST	.9	.27	576	6	48	-	
							.30	607				
							.40	695				

Reference order | 450002.XX.XX.XX.ST.9.XX.XX

MINI PATRICIA ZOOM	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	450003	.01	●	.15-40	.ST	.9	.27	519	6	48	-	
							.30	557				
							.40	583				

Reference order | 450003.XX.XX.XX.ST.9.XX.XX

MINI PATRICIA FLAT	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	450007	.01	●	.15 .30 .36	.ST	.9	.27	548	6	48	-	
							.30	588				
							.40	616				

Reference order | 450007.XX.XX.XX.ST.9.XX.XX

MINI PATRICIAROUND LENSES	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	450008	.01	●	.15 .30 .36	.ST	.9	.27	981	9	48	-	
							.30	1017				
							.40	1080				

Reference order | 450008.XX.XX.XX.ST.9.XX.XX

● Select finishes

.WH-WH .BK-BK

ALARIK
MINI

REF 210006.PN | 210006.SR

PHOTOMETRY
MINI PATRICIA



15º 24º 38º

PHOTOMETRY
MINI PATRICIA ZOOM

15º


PHOTOMETRY
MINI PATRICIA FLAT | LENSES






15º 30º 36º

MINI LENSES	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	450005	.01	●	.23 .28 .36	.ST	.9	.27	981	9	48	-	
							.30	1017				
							.40	1080				

Reference order | 450005.XX.XX.XX.ST.9.XX.XX

MINI MOTION LENSES	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	450004	.01	●	.23 .28 .36	.ST	.9	.27	833	9	48	-	
							.30	892				
							.40	935				

Reference order | 450004.XX.XX.XX.ST.9.XX.XX


MINI LED MODULES	REF.	DIMEN-SION ⬟	FINISH ●	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	450006	.01	●	.OP	.ST	.9	.27	948	6	48	-	
							.30	960				
							.40	990				
	450006	.02	●	.OP	.ST	.9	.27	1896	12	48	-	
							.30	1920				
							.40	1980				
	450006	.03	●	.OP	.ST	.9	.27	3792	24	48	-	
							.30	3840				
							.40	3960				

Reference order | 450006.XX.XX.XX.ST.9.XX.XX

COMPONENTS

COVERT KIT	REF.	FINISH
	TF21	●

Reference order | TF21 | .SR .PN | .XX

SUSPENSION KIT	REF.
	ACC21006.SC



Reference order | ACC21006.SC

JOINTS & CONNECTORS

LINEAR JOINT	ANGLE JOINT	CROSS JOINT	T-JOINT	ROOF-WALL JOINT		FINISH ●
						.BK .WH
UR21	UL21	UC21	UT21	UV21	ACC21006.UP	

Reference order | XX.XX

BOXES (.PN)

ELECTRIC CONVERTER BOX		FINISH
		●
CB06.40	CB08.38	

Reference order | XXXX.XX

● Select finishes



.WH-WH .BK-BK



ALARIK
MINI

REF 210006.PN | 210006.SR

PHOTOMETRY

MINI LENSES



23º 28º 60º

PHOTOMETRY

MINI LED MODULES




OPAL

INCLUDED (.PN)

SC03.SA
WIRE 2M.

PROFILE





FINISHES

● COLORS

DIMENSIONS

⬟ LENGTHS

PER METER

COMPONENTS

MINI PATRICIA
MINI PATRICIA LOL
MINI PATRICIA ZOOM
MINI MOTION LENSES
MINI LENSES
MINI LED MODULES
MINI PATRICIA FLAT
MINI PATRICIA ROUND LENSES

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS


-

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

2 x Suspension cables 3m

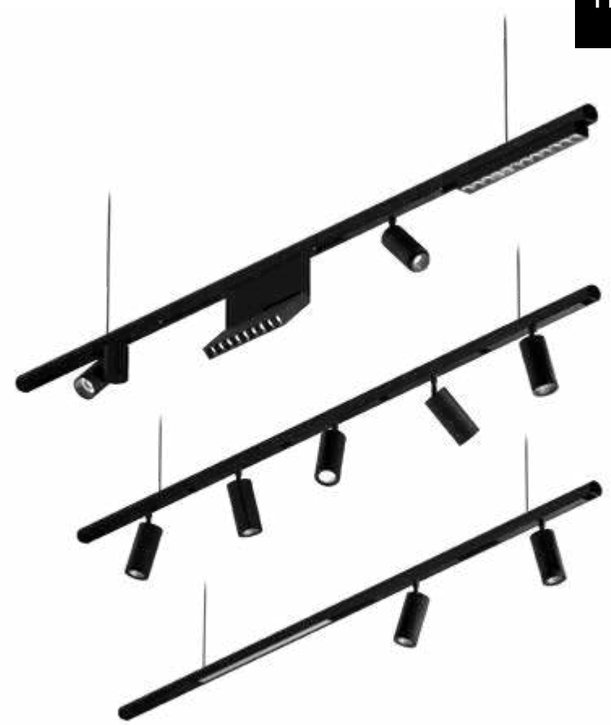

MAGNET

ON DEMAND
Taylor your own design

ALARIK
MINI ROUND

REF 210004.PN








.PN
PENDANT

·210004 ALARIK MINI ROUND | PN
Pag. 175




ALARIK MINI ROUND	REF.	DIMEN-SION ⬟	FINISH ●	SKETCH
	210004	.01 1m.	●	



Reference order | 210004.XX.PN.XX

POWER	DIMENSION ⬟	WATT
DR48	.01	75
	.02	120
	.03	200


Reference order | DR48.XX

POWER FEEDER	REF.	FINISH ●	SKETCH
	ACC21004.CA	.BK-BK .WH-WH	


Reference order | ACC21004.CA.XX

MINI PATRICIA	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	450001	.01	●	.15 .30 .36	.ST	.9	.27	576	3	48	-	
							.30	607				
							.40	695				
	450001	.02	●	.15 .24 .36	.ST	.9	.27	1173	8	48	-	
							.30	1181				
							.40	1207				


Reference order | 450001.XX.XX.XX.ST.9.XX.XX

MINI PATRICIA LOL	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	450002	.01	●	.36	.ST	.9	.27	576	6	48	-	
							.30	607				
							.40	695				


Reference order | 450002.XX.XX.XX.ST.9.XX.XX

MINI PATRICIA ZOOM	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	450003	.01	●	.15-40	.ST	.9	.27	576	6	48	-	
							.30	607				
							.40	695				

Reference order | 450003.XX.XX.XX.ST.9.XX.XX

MINI PATRICIA FLAT	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	450007	.01	●	.15 .30 .36	.ST	.9	.27	558	5	48	-	
							.30	560				
							.40	604				

Reference order | 450007.XX.XX.XX.ST.9.XX.XX

MINI PATRICIA ROUND LENSES	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	450008	.01	●	.15 .30 .36	.ST	.9	.27	558	9	48	-	
							.30	560				
							.40	604				

Reference order | 450008.XX.XX.XX.ST.9.XX.XX

● Select finishes



.WH-WH .BK-BK



ALARIK
MINI ROUND

REF 210004.PN

PHOTOMETRY
MINI PATRICIA



15º 24º 38º


PHOTOMETRY
MINI PATRICIA ZOOM

15º


PHOTOMETRY
MINI PATRICIA FLAT | LENSES





15º 30º 36º

MINI LENSES	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	450005	.01	●	.23 .28 .36	.ST	.9	.27	558	12	48	-	
							.30	560				
							.40	604				

Reference order | 450005.XX.XX.XX.ST.9.XX.XX

MINI MOTION LENSES	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	450004	.01	●	.23 .28 .36	.ST	.9	.27	576	9	48	-	
							.30	607				
							.40	695				

Reference order | 450004.XX.XX.XX.ST.9.XX.XX


MINI LED MODULES	REF.	DIMEN-SION ⬟	FINISH ●	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	450006	.01	●	.OP	.ST	.9	.27	558	6	48	-	
							.30	560				
							.40	604				
	450006	.02	●	.OP	.ST	.9	.27	1115	12	48	-	
							.30	1120				
							.40	1208				
	450006	.03	●	.OP	.ST	.9	.27	1670	24	48	-	
							.30	1680				
							.40	1812				

Reference order | 450006.XX.XX.XX.ST.9.XX.XX

COMPONENTS

COVERT KIT	REF.	FINISH
	TF22	●

Reference order | TF22.PN.XX

SUSPENSION KIT	REF.
	ACC21004.SC



Reference order | ACC21004.SC

JOINTS & CONNECTORS

LINEAR JOINT	FINISH ●
	.BK .WH
ACC21006.UL	

Reference order | ACC21006.UL

BOXES (.PN)

CONNECTION BOX FOR ELECTRIC CONVERTER	ELECTRIC CONVERTER BOX		FINISH
			●
CB09.12	CB06.40	CB08.38	

Reference order | XXXX.XX

● Select finishes



.WH-WH .BK-BK



ALARIK
MINI ROUND

REF 210004.PN

PHOTOMETRY


MINI LENSES



23º 28º 60º

PHOTOMETRY

MINI LED MODULES




OPAL

INCLUDED

SC03.SA
WIRE2M.

PROFILE





FINISHES

● COLORS

DIMENSIONS

⬟ LENGTHS

PER METER

COMPONENTS

LED MODULES
LENSES
MINI TUBE
MINI TUBE STICK

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN



LUMINAIRE INCLUDES

.PN
2 x Suspension cables 3m (each 2m)
NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
DIM DOWN or NON-DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm²
DIM DOWN-UP (only): 1 x Feed Hose 5 x 0,75mm²
.SR
Surface mounting kit

ON DEMAND

Emergency Lighting*
Motion Detection
Taylor your own design
Special RAL Color
Tunable White
Up Light

* Delivered separately (not installed in luminaire).

.SR
.PN
PENDANT | SURFACE

MODULIGHT

REF 10210.PN | 10210.SR

ALUMINIUM PC · 0° · 0° · CRI ≥90 · IK06 · IP20 IP40 · L80 50000H · DIM OPTIONAL · INTEGRATED · INDOOR · 220-240 V 50-60 Hz · CE

INSTALLATIONS



.PN
PENDANT

·10210 MODULIGHT | PN
Pag. 175

.SR
SURFACE


·10210 MODULIGHT | SR
Pag. 175


.RF
RECESSED FRAME


·10210 MODULIGHT | RF
Pag. 175

.TR
TRIMLESS

·10210 MODULIGHT | TR
Pag. 175



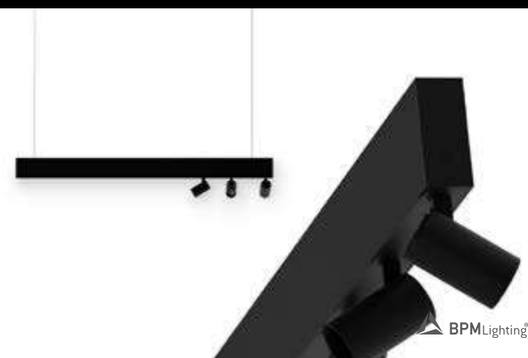


MODULIGHT *1	REF.	DIMEN-SION ⬟	FINISH ●	SKETCH
	**10210**	**.01** 1m	●	


DRIVER	DIMENSION * ⬟		DIMM ▼
DR10210	**.01**	0 - 15 W	**.DA .PU .D1**
	.02	16 - 30 W	
	.03	31 - 65 W	
	.04	66 - 90 W	

Reference order | 10210.XX ⬟ .SR .PN | .XX ●


Reference order | DR10210.XX.XX ⬟ ▼

MINI TUBE	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	SKETCH
	**11526**	**.01** 100mm.	**.BK-BK .WH-WH**	**.15 .24 .38**	.ST	.9	**.27**	348	8	700	
							.30	362			
							.40	421			

Reference order | 11526.XX.XX.XX.ST.9.XX ⬟ ● ■

MINI TUBE STICK	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	SKETCH
	**11538**	**.01** 100mm.	**.BK-BK .WH-WH**	**.15 .24 .38**	.ST	.9	**.27**	348	8	700	
							.30	362			
							.40	421			

Reference order | 11538.XX.XX.XX.ST.9.XX ⬟ ● ■

LENSES	REF.	DIMEN-SIONS ⬟	SHAPE ◗	FINISH ●	OPTIC OPTIONS ■	POW-ER	CRI	K	LUMEN	WATT	mA	SKETCH
	**11525**	**.01** 29mm.	**.RO .SQ**	●	**.20 .40 .60**	.ST	.9	**.27**	142	2	700	
							.30	161				
							.40	212				
	**11525**	**.03** 80mm.	**.RO .SQ**	●	**.20 .40 .60**	..ST	.9	**.27**	426	6	700	
							.30	483				
							.40	636				
	**11525**	**.05** 133mm.	**.RO .SQ**	●	**.20 .40 .60**	.ST	.9	**.27**	710	10	700	
							.30	805				
							.40	1060				
	**11525**	**.10** 263mm.	**.RO .SQ**	●	**.20 .40 .60**	.ST	.9	**.27**	1420	20	700	
							.30	1611				
							.40	2120				

Reference order | 11525.XX.XX.XX.XX.ST.9.XX ⬟ ◗ ● ■

COVERT	REF.	FINISH ●
	**OPAQUE**	**.WH-WH .BK.BK**

Reference order | OPAQUE.XX ●



ROUND .RO
26x29,3 mm
Int Ø14,5 - Ext. Ø23 mm



SQUARE .SQ
26x29,3 mm
Ø14,5 mm

*1 Modular system that requires a technical drawing. *Sistema modular que require de un plano técnico.*

*2 Driver power must be at least 15% higher than the sum of the power of selected LED modules. *La potencia del driver deber ser por lo menos un 15% mayor que la suma de la potencia de los modulos LED elegidos.*

● Select lens finishes



.WH-WH .BK-BK .GC-GC .BM-BM .BS-BS .BC-BC .CR-CR .CB-CB .GY-GY .MG-MG .VC-VC .YM-YM



MODULIGHT

REF 10210.PN | 10210.SR

PHOTOMETRY

MINI TUBE



15º 24º 38º

PHOTOMETRY

MINI LENSES




20º 40º 60º

INCLUDED (.PN)

SC03.SA
WIRE 3M.

PROFILE



LED MODULES	REF.	DIMEN-SION ⬟	FINISH ●	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	SKETCH
	11524	**.01** 281mm.	**.BK-BK**	**.OP** **.MP**	.HI	.9	.27	953	12	700	
							.30	972			
							.40	1141			
	11524	**.02** 562mm.	**.BK-BK**	**.OP** **.MP**	.HI	.9	.27	1906	24	700	
							.30	1944			
							.40	2282			
	11524	**.03** 843mm.	**.BK-BK**	**.OP** **.MP**	.HI	.9	.27	2859	36	700	
							.30	2916			
							.40	3423			
	11524	**.04** 1124mm.	**.BK-BK**	**.OP** **.MP**	.HI	.9	.27	3812	48	700	
							.30	3888			
							.40	4564			
	11524	**.05** 1405mm.	**.BK-BK**	**.OP** **.MP**	.HI	.9	.27	4765	60	700	
							.30	4860			
							.40	5705			
	11524	**.06** 1686mm.	**.BK-BK**	**.OP** **.MP**	.HI	.9	.27	5718	72	700	
							.30	5832			
							.40	6846			


Reference order | 11524.XX.XX.XX.HI.9.XX

COMPONENTS

COVERT KIT	REF.	FINISH
	**TF23**	●

Reference order | TF23 | .SR .PN | .XX

BOXES (.PN)

CONNECTION BOX

CB09.12

Reference order | CB09.12.XX

JOINTS

LINEAR JOINT	ANGLE JOINT	T-JOINT	CROSS JOINT	ROOF-WALL JOINT	FINISH
		X	X		●
UR23 XXXxXXmm	**UL23** XXXxXXXmm	X	X	**UV23** XXXxXXXmm	

Reference order | XX23 | .SR .PN | .XX

● Select finishes






MODULIGHT

REF 10210.PN | 10210.SR

PHOTOMETRY

LED MODULES




OPAL MICROPRISMATIC

INCLUDED (.PN)

SC03.SA
WIRE 3M.

PROFILE



OKKO

Guaranteed success for your lighting projects.

The answer is always yes. There are no limits. Excellent, customisable designs that enhance any architectural and design project. A tasteful, versatile choice that never disappoints.

OK a todas tus propuestas de iluminación.

Ok a todo. Sin límites. Y con gran capacidad de personalización de los embellecedores, para integrarse en proyectos globales de arquitectura y decoración. Sin duda, una elección segura, versátil y que no defrauda.

new



FINISHES

● COLORS

DIMENSIONS

⬟ DIAMETERS mm.

650 | 950 | 1250

LIGHTING OPTIONS

■ BEAM ANGLE

24º | 40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

.PN
3 x Suspension cables 3m
NON-DIM DOWN or DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
.SR
Surface mounting kit

new





REMOTE

ON DEMAND

Emergency Lighting *
Motion Detection
Wireless Control Options (Casambi)

* Delivered separately
(not installed in luminaire).

.SR
.PN
PENDANT | SURFACE

INSTALLATIONS

ALUMINIUM PC | 0° | 0° | CRI ≥90 | IK08
IP20 IP40 | LIFE 50000H | DIM OPTIONAL | | REMOTE
INDOOR | | 220-240 V 50-60 Hz | CE

OKKO
MODULAR

REF 10254.PN | 10254.SR



.PN
PENDANT

·10254 OKKO MODULAR | PN
Pag. 175




.SR
SURFACE

·10254 OKKO MODULAR | SR
Pag. 175






OKKO	REF.	DIMENSION ⬟	FINISH	POSITIONS
	10254	.65	●	10
		.95		15
		.125		20

Reference order | 10254.XX ⬟ | .SR | .PN | .XX ●

Configure your OKKO combining LED modules and OPAQUE as you wish.
Configura tu OKKO combinando los módulos LED y OPAQUES que desees.

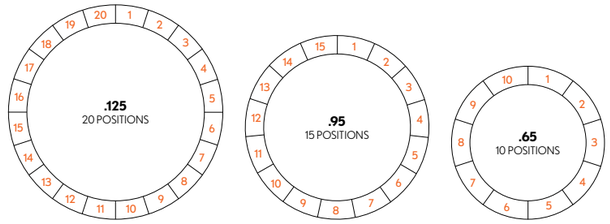

OKKO LED MODULES	REF.	DIMENSION ⬟	POSITION	FINISH	OPTIC OPTIONS ■	POWER	CRI	LUMEN .27	LUMEN .30	LUMEN .40	WATT	mA	SKETCH
	110003	.65	.01 ~.10	●	.24 .40 .60	.ST	.9	541	586	671	7	500	
		.95	.01 ~.15					541	586	671	7	500	
		.125	.01 ~.20					541	586	671	7	500	

Reference order | 110003.XX.XX.XX ⬟ .ST ● .9 ■ .XX

OKKO OPAQUE	REF.	DIMENSION ⬟	FINISH	
	ACC10254	.65	●	
		.95		
		.125		

Reference order | ACC10254.XX ⬟ .XX ●

OKKO DRIVER	DIMENSION * ⬟		DIMM ▼
DR10254	.01	1 - 4 modules	.DA .PU .D1
	.02	5 - 10 modules	
	.03	11 - 13 modules	
	.04	14 - 17 modules	
	.05	18 - 20 modules	



Reference order | DR10254.XX ⬟ .XX ▼

CABLE CONCENTRATOR	CONNECTION BOX	REF.	FINISH
	 40 Ø100	CB10	●
	 26 Ø160	CB02	
	 23 Ø285	CB05	

Reference order | CBXX.XX ●


CABLE CONCENTRATOR KIT	CONNECTION BOX	REF.	FOR MODEL	FINISH
	 Ø85 +  CB010	SC21	.25 .35	●
	 Ø125 +  CB02	SC22	.45 .65	
	 Ø215 +  CB05	SC23	.95 .125	

Reference order | SC20.XX ●

CONNECTION BOX AND DRIVER BOX FOR REMOTE DRIVER		DRIVER BOX NON-DIMM	DRIVER BOX DIMMABLE	FINISH
 40 Ø102 40 418		 34 Ø310	 34 Ø415	●
CB03	CB04.OP *	CB05.32	CB12.40	


* No finish color, use this reference as it is (CB04.OP).
Sin acabado de color, la referencia es tal cual (CB04.OP)

Reference order | CBXXXX.XX ●

SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA

REFERENCE ORDER EXAMPLE
EJEMPLO DE REFERENCIA



Create an OKKO like the one in the example. *Crea un OKKO como el del ejemplo:*

1	Select PROFILE . *Selecciona PERFIL.*	10254.95.PN.XX
2	Confirm LED MODULES position. *Confirma posición de los módulos LED.*	110003.95.01.XX.XX.ST9.XX.XX 110003.95.02.XX.XX.ST9.XX.XX 110003.95.03.XX.XX.ST9.XX.XX 110003.95.06.XX.XX.ST9.XX.XX 110003.95.07.XX.XX.ST9.XX.XX 110003.95.08.XX.XX.ST9.XX.XX 110003.95.11.XX.XX.ST9.XX.XX 110003.95.12.XX.XX.ST9.XX.XX 110003.95.13.XX.XX.ST9.XX.XX
3	Add number of OPAQUE diffusers. *Añade el número de difusores OPAQUE.*	ACC10254.95.XX (6 uds.)
4	Verify DRIVER depending on the number of LED modules. *Verifica el DRIVER dependiendo del número de módulos LED.*	DR10254.02.XX

● Select finishes






OKKO
MODULAR

REF 10254.PN | 10254.SR

Let's create

Give full rein to your immagination. Configure your Okko Modular to suit best your project needs
¡Da rienda suelta a tu imaginación! Configura tu Okko Modular según las necesidades de tu proyecto

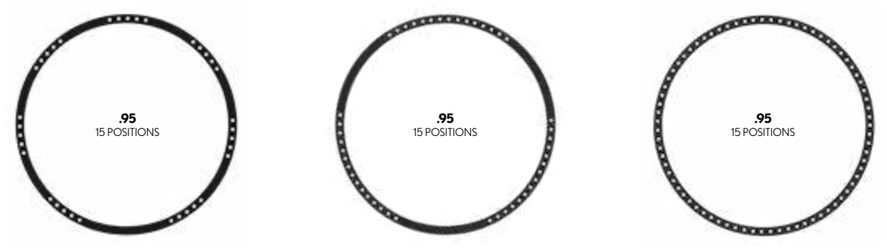


PHOTOMETRY



INCLUDED (.PN)

SC03.SA
WIRE 3M.

PROFILE





FINISHES

● COLORS

DIMENSIONS

⬟ LENGTHS mm.

790 | 1185 | 1580 | 1975

LIGHTING OPTIONS

■ BEAM ANGLE

24º | 40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

.PN
2 x Suspension cables 3m
NON-DIM DOWN or DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
.SR
Surface mounting kit

new





ON DEMAND

Emergency Lighting *
Motion Detection
Wireless Control Options (Casambi)

REMOTE

* Delivered separately
(not installed in luminaire).

INSTALLATIONS



OKKO
MODULAR LINE

REF 210012.PN | 210012.SR





.PN
PENDANT

·210012 OKKO MODULAR LINE | PN - Pag. 175

.SR
SURFACE

·210012 OKKO MODULAR LINE | SR - Pag. 175



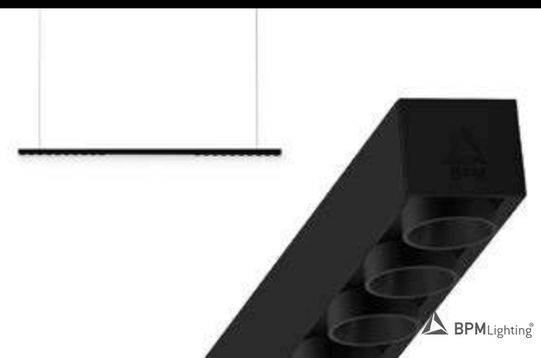

OKKO LINE	REF.	DIMENSION ⬟	FINISH	POSITIONS
	210012	.02	●	2
		.03		3
		.04		4
		.05		5

.02 - 2 POSITIONS - 790mm | 1 | 2 |

.03 - 3 POSITIONS - 1185mm | 1 | 2 | 3 |

.04 - 4 POSITIONS - 1580mm | 1 | 2 | 3 | 4 |

.05 - 5 POSITIONS - 1975mm | 1 | 2 | 3 | 4 | 5 |

Reference order | 210012.XX | .SR .PN | .XX

OKKO LED MODULES	REF.	DIMENSION ⬟	POSITION	FINISH	OPTIC OPTIONS ■	POWER	CRI	LUMEN .27	LUMEN .30	LUMEN .40	WATT	mA	SKETCH
	110004	.10	.01	●	.24 .40 .60	.ST	.9	1114	1245	1320	11.5	500	395
			.02										
			.03										
			.04										
			.05										

Reference order | 110004.XX.XX.XX.ST9.XX

OPAQUE	REF.	DIMENSION ⬟	FINISH	SKETCH
	ACC210012	.10	●	395

Reference order | ACC210012.XX.XX




OKKO LINE DRIVER	DIMENSION ⬟		DIMM ▼
DR210012	.01	1 - 5 modules	.DA .PU .D1
	.02	6 - 9 modules	
	.03	10 - 13 modules	

Reference order | DR210012.XX.XX

COVERT KIT	REF.	FINISH
	TF24	●


Reference order | TF24 | .SR .PN | .XX



CONNECTION BOX AND DRIVER BOX FOR REMOTE DRIVER		DRIVER BOX NON-DIMM	DRIVER BOX DIMMABLE	FINISH
				●
CB09.12	CB04.OP *	CB09.32	CB09.40	

* No finish color, use this reference as it is (CB04.OP).
Sin acabado de color, la referencia es tal cual (CB04.OP)

Reference order | CBXXXX.XX

SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA

REFERENCE ORDER EXAMPLE
EJEMPLO DE REFERENCIA




.05 - 5 POSITIONS

Create an OKKO like the one in the example. *Crea un OKKO como el del ejemplo:*

1	Select PROFILE . *Selecciona PERFIL.*	210012.05.PN.XX
2	Confirm LED MODULES position. *Confirma posición de los módulos LED.*	110004..10.01.XX.XX.ST9.XX.XX 110004..10.02.XX.XX.ST9.XX.XX 110004..10.04.XX.XX.ST9.XX.XX 110004..10.05.XX.XX.ST9.XX.XX
3	Add number of OPAQUE diffusers. *Añade el número de difusores OPAQUE.*	ACC210012.10.XX (1 ud.)
4	Verify DRIVER depending on the number of LED modules. *Verifica el DRIVER dependiendo del número de módulos LED.*	DR210012.01.XX

● Select finishes





OKKO
MODULAR LINE

REF 210012.PN | 210012.SR




PHOTOMETRY



INCLUDED (.PN)

SC03.SA
WIRE 3M.

PROFILE





FINISHES

● COLORS

DIMENSIONS

⬟ DIAMETERS mm.

650 | 950 | 1250

LIGHTING OPTIONS

■ BEAM ANGLE

24º | 40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION


DOWN


LUMINAIRE INCLUDES

.PN
3 x Suspension cables 3m
NON-DIM DOWN or DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
.SR
Surface mounting kit

REMOTE

new

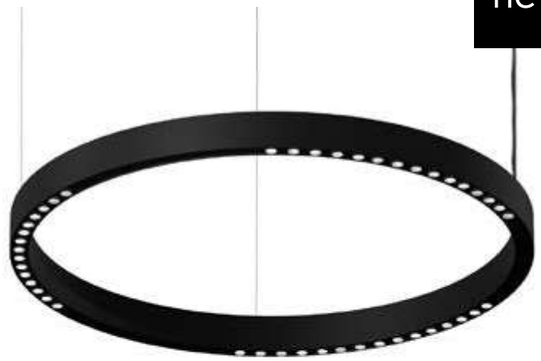



ON DEMAND

Emergency Lighting *
Motion Detection
Wireless Control Options (Casambi)

* Delivered separately
(not installed in luminaire).

.SR
.PN
PENDANT | SURFACE

INSTALLATIONS

ALUMINIUM PC · 0° · 0° · CRI ≥90 · IK06 · IP20 IP40 · LIFE 50000H · DIM OPTIONAL · REMOTE · INDOOR · 220-240 V 50-60 Hz · CE

OVALI MODULAR

REF 10252.PN | 10252.SR



.PN
PENDANT

·10252 OVALI MODULAR | PN
Pag. 175




.SR
SURFACE

·10252 OVALI MODULAR| SR
Pag. 175






OVALI	REF.	DIMENSION ⬟	FINISH	POSITIONS
	10252	.65	●	10
		.95		15
		.125		20

Reference order | 10252.XX ⬟ | .SR .PN | .XX ●

Configure your OVALI combining LED modules and OPAQUE as you wish.
Configura tu OVALI combinando los módulos LED y OPAQUES que desees.

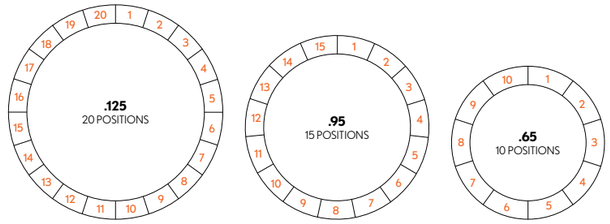

OVALI LED MODULES	REF.	DIMENSION ⬟	POSITION	FINISH	OPTIC OPTIONS ■	POWER	CRI	LUMEN .27	LUMEN .30	LUMEN .40	WATT	mA	SKETCH
	110002	.65	.01 ~.10	●	.24 .40 .60	.ST	.9	541	586	671	7	500	
		.95	.01 ~.15					541	586	671	7	500	
		.125	.01 ~.20					541	586	671	7	500	

Reference order | 110002.XX ⬟ .XX ● .XX ■ .XX .ST .9 .XX

OVALI OPAQUE	REF.	DIMENSION ⬟	FINISH	SKETCH
	ACC10252	.65	●	
		.95		
		.125		



Reference order | ACC10252.XX ● .XX ●

OVALI DRIVER	DIMENSION ⬟		DIMM ▼
DR10252	.01	1 - 4 modules	.DA .PU .D1
	.02	5 - 10 modules	
	.03	11 - 13 modules	
	.04	14 - 17 modules	
	.05	18 - 20 modules	



Reference order | DR10252.XX ⬟ .XX ▼

CABLE CONCENTRATOR	CONNECTION BOX	REF.	FINISH
	 Ø100 40	CB10	●
	 Ø160 25,5	CB02	
	 Ø285 23	CB05	

Reference order | CBXX.XX ●


CABLE CONCENTRATOR KIT	CONNECTION BOX	REF.	FOR MODEL	FINISH
	 Ø125 + CB02	SC22	.65	●
	 Ø215 + CB05	SC23	.95 .125	

Reference order | SC20.XX ●

CONNECTION BOX AND DRIVER BOX FOR REMOTE DRIVER		DRIVER BOX NON-DIMM	DRIVER BOX DIMMABLE	FINISH
 Ø102 40 418 40		 Ø310 33.5	 Ø415 33.5	●
CB03	CB04.OP *	CB05.32	CB12.40	


* No finish color, use this reference as it is (CB04.OP).
Sin acabado de color, la referencia es tal cual (CB04.OP)

Reference order | CBXXXX.XX ●

SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA

REFERENCE ORDER EXAMPLE
EJEMPLO DE REFERENCIA



Create an OVALI like the one in the example. *Crea un OVALI como el del ejemplo:*

1	Select PROFILE . *Selecciona PERFIL.*	10252.95.PN.XX
2	Confirm LED MODULES position. *Confirma posición de los módulos LED.*	110002.95.01.XX.XX.ST.9.XX.XX 110002.95.02.XX.XX.ST.9.XX.XX 110002.95.03.XX.XX.ST.9.XX.XX 110002.95.06.XX.XX.ST.9.XX.XX 110002.95.07.XX.XX.ST.9.XX.XX 110002.95.08.XX.XX.ST.9.XX.XX 110002.95.11.XX.XX.ST.9.XX.XX 110002.95.12.XX.XX.ST.9.XX.XX 110002.95.13.XX.XX.ST.9.XX.XX
3	Add number of OPAQUE diffusers. *Añade el número de difusores OPAQUE.*	ACC10252.95.XX (6 uds.)
4	Verify DRIVER depending on the number of LED modules. *Verifica el DRIVER dependiendo del número de módulos LED.*	DR10252.02.XX

● Select finishes







OVALI
MODULAR


REF 10252.PN | 10252.SR

Let's create

Give full rein to your immagination. Configure your Ovali Modular to suit best your project needs
¡Da rienda suelta a tu imaginación! Configura tu Ovali Modular según las necesidades de tu proyecto








PHOTOMETRY



INCLUDED (.PN)

SC03.SA
WIRE 3M.

PROFILE





FINISHES

● COLORS

DIMENSIONS

⬟ LENGTHS mm.

790 | 1185 | 1580 | 1975

LIGHTING OPTIONS

■ BEAM ANGLE

24º | 40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

.PN
2 x Suspension cables 3m
NON-DIM DOWN or DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
.SR
Surface mounting kit

new





REMOTE

ON DEMAND

Emergency Lighting *
Motion Detection
Wireless Control Options (Casambi)

* Delivered separately
(not installed in luminaire).

.SR
.PN
PENDANT | SURFACE

INSTALLATIONS

ALUMINIUM PC | 0° | 0° | CRI ≥90 | IK08
IP20 IP40 | LIFE 50000H | DIM OPTIONAL | REMOTE
INDOOR | 220-240 V 50-60 Hz | CE

OVALI
MODULAR LINE

REF 210013.PN | 210013.SR





.PN
PENDANT

·210013 OVALI MODULAR LINE | PN
Pag. 175

.SR
SURFACE

·210013 OVALI MODULAR LINE | SR
Pag. 175



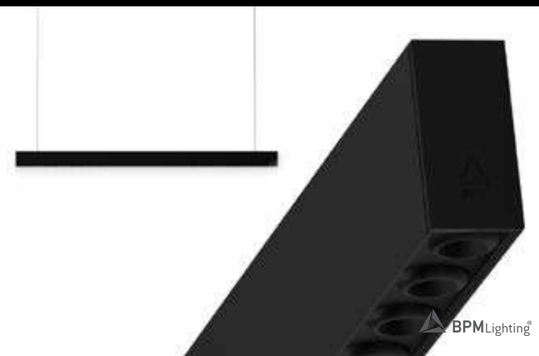

OVALI LINE	REF.	DIMENSION ⬟	FINISH	POSITIONS
	210013	.02	●	2
		.03		3
		.04		4
		.05		5

.02 - 2 POSITIONS - 790mm (1 2)
.03 - 3 POSITIONS - 1185mm (1 2 3)
.04 - 4 POSITIONS - 1580mm (1 2 3 4)
.05 - 5 POSITIONS - 1975mm (1 2 3 4 5)

Reference order | 210013.XX | .SR .PN | .XX

OVALI ELECTRIC SYSTEM	REF.	DIMENSION ⬟	POSITION	FINISH	OPTIC OPTIONS ■	POWER	CRI	LUMEN .27	LUMEN .30	LUMEN .40	WATT	mA	SKETCH
	110005	.10	.01	●	.24 .40 .60	.ST	.9	1114	1245	1320	11.5	500	395
			.02										
			.03										
			.04										
			.05										

Reference order | 110005.XX.XX.XX.ST9.XX

OVALI OPAQUE	REF.	DIMENSION ⬟	FINISH	
	ACC210013	.10	●	395


Reference order | ACC210013.XX.XX




OKKO LINE DRIVER	DIMENSION ⬟		DIMM ▼
DR210013	.01	1 - 5 modules	.DA .PU .D1
	.02	6 - 9 modules	
	.03	10 - 13 modules	

Reference order | DR210013.XX.XX

COVERT KIT	REF.	FINISH
	TF25	●


Reference order | TF25 | .SR .PN | .XX

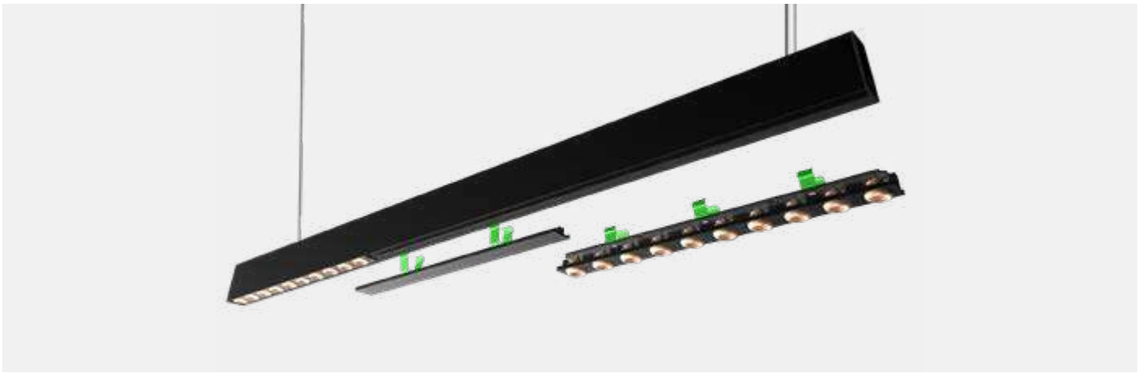

CONNECTION BOX AND DRIVER BOX FOR REMOTE DRIVER		DRIVER BOX NON-DIMM	DRIVER BOX DIMMABLE	FINISH
				
CB09.12	CB04.OP *	CB09.32	CB09.40	

* No finish color, use this reference as it is (CB04.OP).
Sin acabado de color, la referencia es tal cual (CB04.OP)

Reference order | CBXXXX.XX

SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA

REFERENCE ORDER EXAMPLE
EJEMPLO DE REFERENCIA



.05 - 5 POSITIONS

Create an OVALI like the one in the example. *Crea un OVALI como el del ejemplo:*

1	Select PROFILE . *Selecciona PERFIL.*	21001305.PN.XX
2	Confirm LED MODULES position. *Confirma posición de los módulos LED.*	110005.10.01.XX.XX.ST9.XX.XX 110005.10.02.XX.XX.ST9.XX.XX 110005.10.04.XX.XX.ST9.XX.XX 110005.10.05.XX.XX.ST9.XX.XX
3	Add number of OPAQUE diffusers. *Añade el número de difusores OPAQUE.*	ACC210013.10.XX (1 ud.)
4	Verify DRIVER depending on the number of LED modules. *Verifica el DRIVER dependiendo del número de módulos LED.*	DR210013.01.XX


● Select finishes





OVALI
MODULAR LINE

REF 210013.PN | 210013.SR

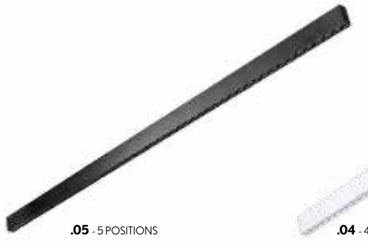

.05 - 5 POSITIONS



.04 - 4 POSITIONS



.03 - 3 POSITIONS



.02 - 2 POSITIONS

PHOTOMETRY




24º 40º 60º

INCLUDED (.PN)

SC03.SA
WIRE 3M.

PROFILE



ACOUSTIC
SYSTEM

Sustainability, acoustics & lighting in one solution

Pleasing lighting and sound solutions. Everything in perfect harmony. That's BPM Acoustic, an innovative response to specific lighting for noisy areas and when peace and quiet are essential.
BPM Acoustic also features avant-garde panel design, with a hidden lighting solution to achieve a quiet environment in an unobtrusive way. And another plus point is sustainability.

Sostenibilidad, acústica e iluminación en una solución

Soluciones lumínicas, acústicas y estéticas. Todo a la vez, y todo en armonía. Así es BPM Acoustic, una respuesta innovadora a necesidades específicas de iluminación en espacios de gran carga sonora o donde se requiere de un ambiente de silencio.
BPM Acoustic es además una propuesta vanguardista en cuanto a diseño de panel, con una solución de iluminación oculta para incidir en el concepto de discreción y tranquilidad con el valor incorporado de la sostenibilidad.

BPMLighting®
Let's get brighter



FINISHES

● ACOUSTIC COLORS

● PROFILE COLORS

DIMENSIONS

⬟ LENGTHS mm.

1170

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH


▲ LIGHT DISTRIBUTION


DOWN

LUMINAIRE INCLUDES

.PN
2 x Suspension cables 3m
NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
DIM DOWN: 1 x Feed Hose 5 x 0,75mm² Diffuser
Cover Kit
Connection Box CB09.12
.SR
Surface mouting kit

new

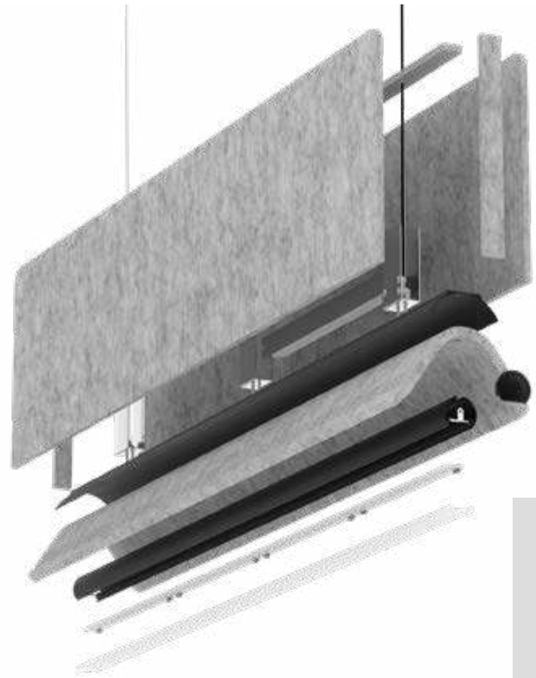



ON DEMAND

Emergency Lighting*
Motion Detection
Well-Certified LED Boards
Special Color Temperature
RGB
TW
Thematic LED
Wireless Control Options (Casambi)
CRI 80


* Delivered separately
(not installed in luminaire).

.SR
.PN
PENDANT | SURFACE

ALUMINIUM PC | 0° | 0° | CRI ≥90 | IK06 | IP20 IP40 | LIFE 50000H | DIM OPTIONAL | INTEGRATED | INDOOR | 220-240 V 50-60 Hz | CE

ACOUSTIC LAMBDA

REF 230001.PN | 230001.SR

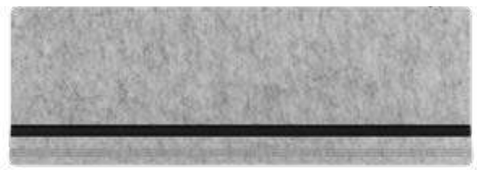







REF.	DIMENSION ⬟	FINISH ●		DIFFUSER ■	POWER	CRI	DOWNLIGHT * | LUMEN .27	.30	.40	WATT	DIMM ▼
230001	**.01** 1170mm	**.50** **.51** **.52**	**WH** **BK**	**.OP** **.MP**	**.ST**	**.9**	3060	3180	3300	24	**.DA** **.PU** **.D1**

Reference order | ⬟ | .SR | ● | ■ | ▼
230001.01 | .PN | .XX-XX.XX.ST.9.XX.XX






.PN



.SR

* Down light (direct light) works at 500mA. *La luz directa trabaja a 500mA.*

- Select Acoustic finishes



.50 .51 .52

- Select Profile finishes



.WH .BK




ACOUSTIC LAMBDA

REF 230001.PN | 230001.SR

ACOUSTIC PROPERTIES


ENVIRONMENTAL:	Comply with the requirements detailed in the BREEAM International, BREEAM-NOR v6.0 and LEED v4.1. Standards
FIRE TEST:	Classification B-s1, d0 and CTEDB-SI Compliant
BAFFLE THIKNESS:	155Kg/m^3
BABBLE DENSITY:	9mm
SOUND ABSORPTION COEFFICIENT:	0,77 αw

PHOTOMETRY




OPAL MICROPRISMATIC

INCLUDED (.PN)



SB09.12 CONNECTION BOX | SC03.SA WIRE 3M. | COVER KIT

PROFILE





Designed by Rafa Ortega, this model belongs to Papyrus collection, a selection of luminaires that give shape and style to your decorative schemes while providing sustainable sound insulation in the room.
Diseñado por Rafa Ortega, este modelo pertenece a la colección Papyrus, una colección que da forma y estilo a tus esquemas decorativos a la vez que proporciona un aislamiento acústico sostenible en la estancia.

new

FINISHES

● ACOUSTIC COLORS

● PROFILE COLORS

DIMENSIONS

⬟ LENGTHS mm.

1200

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS


DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

.PN
2 x Suspension cables 3m
NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
DIM DOWN: 1 x Feed Hose 5 x 0,75mm²
Diffuser - Cover Kit
Connection Box CB09.12
.SR
Surface mounting kit

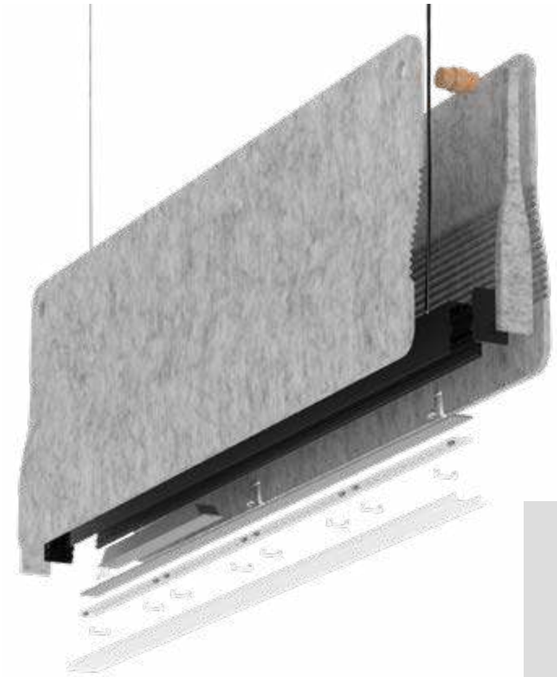



ON DEMAND

Emergency Lighting*
Motion Detection
Well-Certified LED Boards
Special Color Temperature
RGB
TW
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately (not installed in luminaire).



ACOUSTIC ALBA

Designed by Rafa Ortega

REF 230004.PN | 230004.SR









REF.	DIMENSION ⬟	FINISH ●		DIFFUSER ■	POWER	CRI	DOWNLIGHT * | LUMEN .27	.30	.40	WATT	DIMM ▼
230004	**.01** 1200mm	**.50** **.51**	**WH** **BK**	**.OP** **.MP**	.ST	.9	3060	3180	3300	24	**.DA** **.PU** **.D1**

Reference order | 230004.01 ⬟ | .SR | .PN | ● .XX-XX.XX.ST.9.XX.XX ■ ▼





.PN

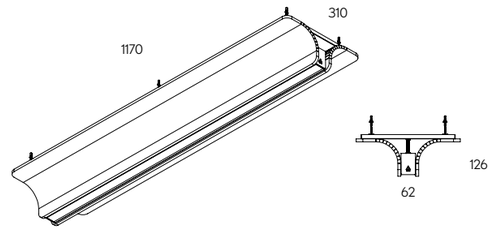

.SR


* Down light (direct light) works at 500mA. *La luz directa trabaja a 500mA.*

PENDANT | SURFACE

.SR

.PN

- Select Acoustic finishes



.50 .51

- Select Profile finishes



.WH .BK



ACOUSTIC ALBA


Designed by Rafa Ortega

REF 230004.PN | 230004.SR

ACOUSTIC PROPERTIES


ENVIRONMENTAL:	Comply with the requirements detailed in the BREEAM International, BREEAM-NOR v6.0 and LEED v4.1. Standards
FIRE TEST:	Classification B-s1, d0 and CTEDB-SI Compliant
BAFFLE THIKNESS:	155Kg/m^3
BABBLE DENSITY:	9mm
SOUND ABSORPTION COEFFICIENT:	0,77 αw

PHOTOMETRY




OPAL MICROPRISMATIC


INCLUDED



SB0912 CONNECTION BOX | SC03.SA WIRE 3M. | COVER KIT

PROFILE



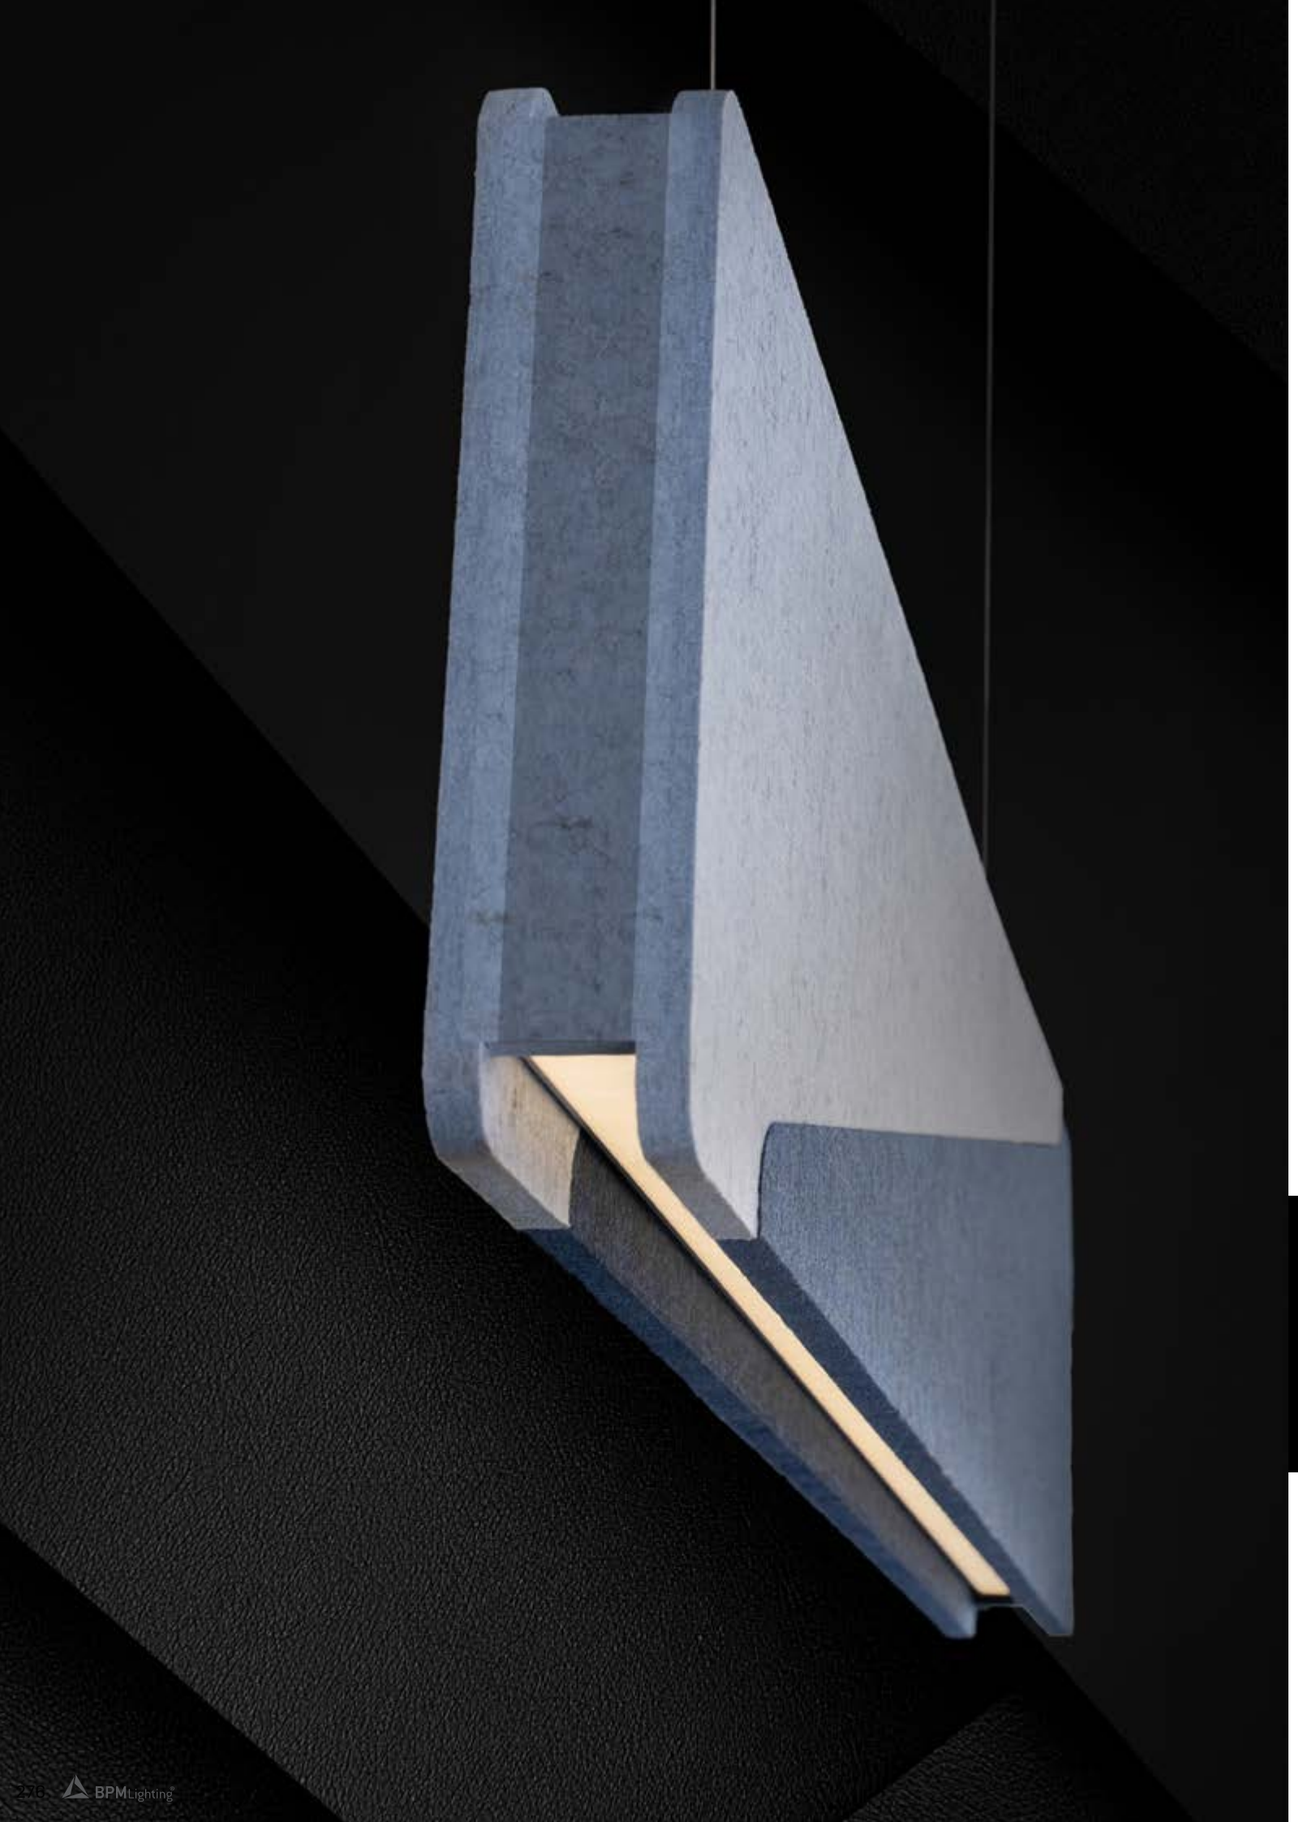

FINISHES

● ACOUSTIC COLORS

● PROFILE COLORS

DIMENSIONS

⬟ LENGTHS mm.

1190

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH


▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

2 x Suspension cables 3m
NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
DIM DOWN: 1 x Feed Hose 5 x 0,75mm²
Diffuser
Cover Kit
Connection Box CB09.12

new

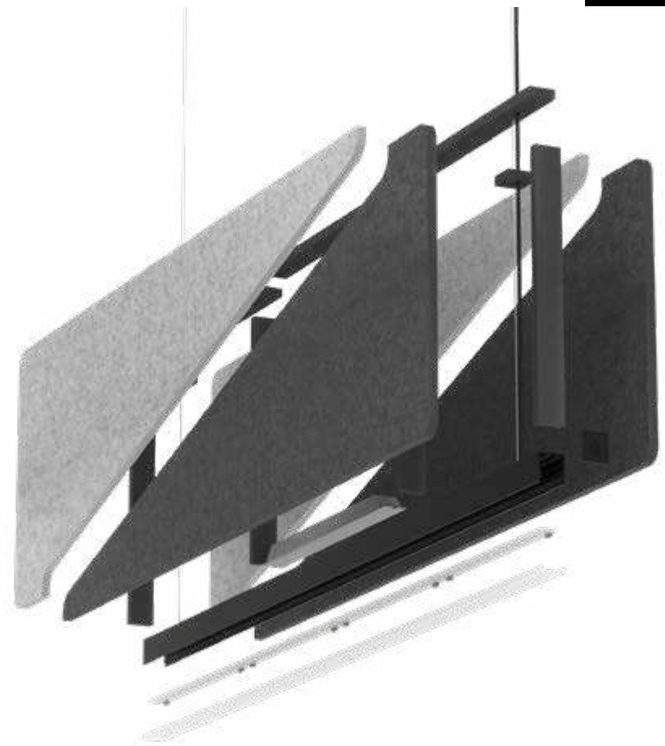

ON DEMAND

Emergency Lighting*
Motion Detection
Well-Certified LED Boards
Special Color Temperature
RGB
TW
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).



ACOUSTIC
ALBA MINI

REF 230008.PN








REF.	DIMENSION ⬟	FINISH ●		DIFFUSER ■	POWER	CRI	DOWNLIGHT * | LUMEN .27	.30	.40	WATT	DIMM ▼
230008	**.01** 1190mm	**.50-51** **.53-54** **.50-53**	**WH** **BK**	**.OP** **.MP**	**.ST**	**.9**	3060	3180	3300	24	**.DA** **.PU** **.D1**

Reference order | 230008.01.PN.XX-XX.XX.ST.9.XX.XX

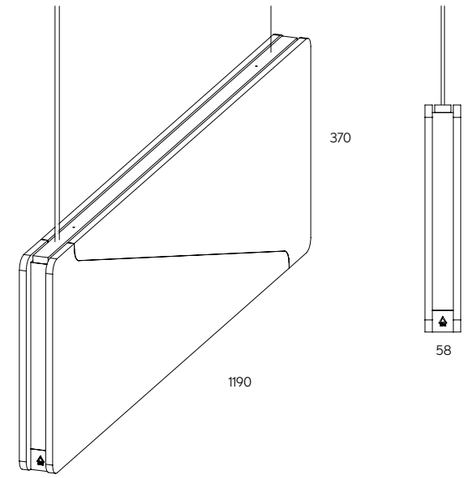

* Down light (direct light) works at 500mA. *La luz directa trabaja a 500mA.*

.PN

PENDANT

- Select acoustic finishes



.50-51 .53-54 .50-53

- Select profile finishes



.WH .BK




ACOUSTIC ALBA MINI

REF 230008.PN

ACOUSTIC PROPERTIES


ENVIRONMENTAL:	Comply with the requirements detailed in the BREEAM International, BREEAM-NOR v6.0 and LEED v4.1. Standards
FIRE TEST:	Classification B-s1, d0 and CTEDB-SI Compliant
BAFFLE THIKNESS:	190Kg/m^3
BABBLE DENSITY:	12mm
SOUND ABSORPTION COEFFICIENT:	0,92 αw

PHOTOMETRY




OPAL MICROPRISMATIC

INCLUDED



SB09.12 CONNECTION BOX SC03.SA WIRE 3M. COVER KIT

PROFILE



Designed by Rafa Ortega, this model belongs to Papyrus collection, a selection of luminaires that give shape and style to your decorative schemes while providing sustainable sound insulation in the room.
Diseñado por Rafa Ortega, este modelo pertenece a la colección Papyrus, una colección que da forma y estilo a tus esquemas decorativos a la vez que proporciona un aislamiento acústico sostenible en la estancia.

FINISHES

● ACOUSTIC COLORS

● PROFILE COLORS

DIMENSIONS

⬟ LENGTHS mm.

1200

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH


▲ LIGHT DISTRIBUTION


DOWN

LUMINAIRE INCLUDES

2 x Suspension cables 3m
NON-DIM DOWN or DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
Connection Box (CB09.32)
Cover Kit
Diffuser

new

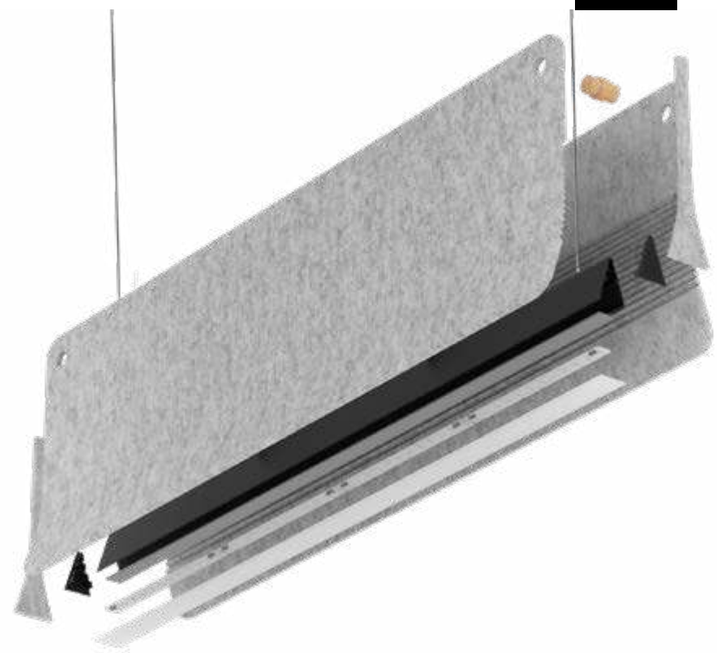



ON DEMAND

Emergency Lighting*
Motion Detection
Well-Certified LED Boards
Special Color Temperature
RGB
TW
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).

.PN

PENDANT

ALUMINIUM PC | 0° | 0° | CRI ≥90 | IK08 | IP40 | LIFE 50000H | DIM OPTIONAL | INTEGRATED | INDOOR | 220-240 V 50-60 Hz | CE

ACOUSTIC ALZIRA

Designed by Rafa Ortega

REF 230002.PN









REF.	DIMENSION ⬟	FINISH ●		DIFFUSER ■	POWER	CRI	DOWNLIGHT * | LUMEN .27	.30	.40	WATT K	DIMM ▼
230002	**.01** 1200mm	**.50** **.51**	**WH** **BK**	**.OP** **.MP**	.ST	.9	3060	3180	3300	24	**.DA** **.PU** **.D1**


Reference order | 230002.XX.PN.XX-XX.XX.XX.9.XX.XX

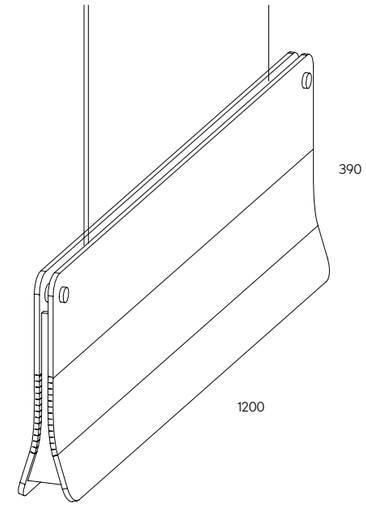



* Down light (direct light) works at 500mA. *La luz directa trabaja a 500mA.*

- Select Acoustic finishes



.50 .51

- Select Profile finishes



.WH .BK



ACOUSTIC ALZIRA


Designed by Rafa Ortega

REF 230002.PN

ACOUSTIC PROPERTIES


ENVIRONMENTAL:	Comply with the requirements detailed in the BREEAM International, BREEAM-NOR v6.0 and LEED v4.1. Standards
FIRE TEST:	Classification B-s1, d0 and CTEDB-SI Compliant
BAFFLE THIKNESS:	155Kg/m^3
BABBLE DENSITY:	9mm
SOUND ABSORPTION COEFFICIENT:	0,77 αw

PHOTOMETRY



OPAL MICROPRISMATIC

INCLUDED




CONNECTION BOX

SC03.SA WIRE 3M.



COVERT KIT

PROFILE





FINISHES

● ACOUSTIC COLORS

● PROFILE COLORS

DIMENSIONS

⬟ LENGTHS mm.

1163

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH


▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

2 x Suspension cables 3m
NON-DIM DOWN or DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
Diffuser
Cover Kit
Connection Box (CB09.32)

new

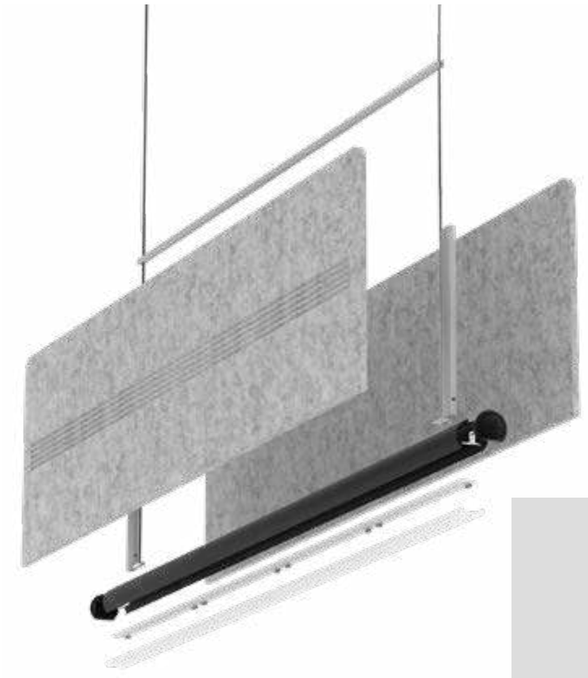



ON DEMAND

Emergency Lighting*
Motion Detection
Well-Certified LED Boards
Special Color Temperature
RGB
TW
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).

PENDANT .PN



ACOUSTIC LINGGO MINI

REF 230007.PN









REF.	DIMENSION ⬟	FINISH ●		DIFFUSER ■	POWER	CRI	DOWNLIGHT * | LUMEN .27	.30	.40	WATT K	DIMM ▼
230007	**.01** 1163mm	**.50** **.51**	**WH** **BK**	**.OP** **.MP**	**.ST**	**.9**	3060	3180	3300	24	**.DA** **.PU** **.D1**

Reference order | 230007.XX.PN.XX-XX.XX.ST.9.XX.XX

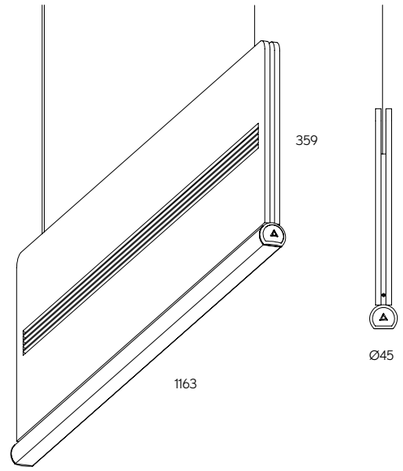

* Down light (direct light) works at 500mA. *La luz directa trabaja a 500mA.*

- Select Acoustic finishes



.50 .51

- Select Profile finishes



WH BK




ACOUSTIC LINGGO MINI

REF 230007.PN

ACOUSTIC PROPERTIES


ENVIRONMENTAL:	Comply with the requirements detailed in the BREEAM International, BREEAM-NOR v6.0 and LEED v4.1. Standards
FIRE TEST:	Classification B-s1, d0 and CTEDB-SI Compliant
BAFFLE THIKNESS:	155Kg/m^3
BABBLE DENSITY:	9mm
SOUND ABSORPTION COEFFICIENT:	0,77 αw

PHOTOMETRY



OPAL

INCLUDED




CB09.32
CONNECTION BOX

SC03.SA
WIRE 3M.



COVER KIT

PROFILE



new

FINISHES

● ACOUSTIC COLORS

● PROFILE COLORS

DIMENSIONS

⬟ LENGTHS MM.

1190

COMPONENTS

SLIM PATRICIA
SLIM LED BALL
SLIM TUBE
SLIM WALL WASHER
SLIM LENSES
SLIM MOTION LENSES
SLIM LED MODULES

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS


DALI | 1.10

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

Suspension cables
NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
DIM DOWN: 1 x Feed Hose 5 x 0,75mm²
Cover Kit
Connection Box CB09.12

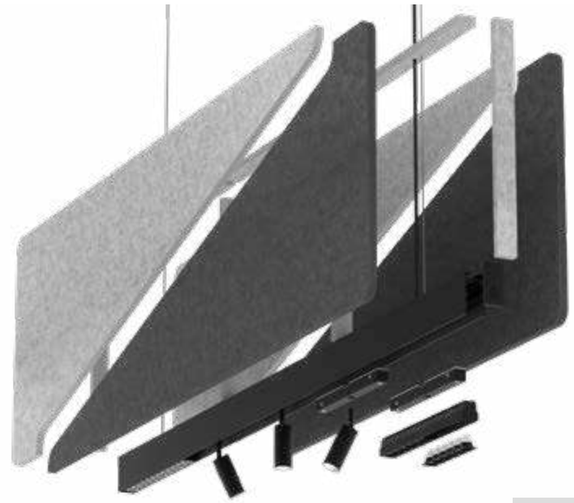




.PN

PENDANT





ACOUSTIC ALARIK SLIM

REF 230009.PN

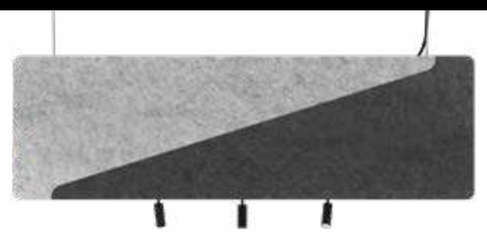





ALARIK SLIM	REF.	DIMEN-SION ⬟	FINISH ●	SKETCH
	230009	.01 1190mm.	●	


POWER	DIMENSION ⬟	WATT
DR48	.01	75

Reference order | 230009.XX.PN.XX-XX-XX


Reference order | DR48.XX

SLIM PATRICIA	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	11544	.01	.BK-BK .WH-WH	.15 .38 .60	.ST	.9	.27	576	8	48	.DA .D1	
							.30	607				
							.40	695				
	11544	.02	.BK-BK .WH-WH	.15 .38 .60	.ST	.9	.27	1173	15	48	.DA .D1	
							.30	1181				
							.40	1207				
	11546	.03	.BK-BK .WH-WHz	.15-36 .36-60	.ST	.9	.27	2038	25	48	.DA .D1	
							.30	2254				
							.40	2320				


Reference order | 11544.XX.XX.XX.ST.9.XX.XX

SLIM LED BALL	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	11551	.01	.BK-BK .WH-WH	-	.ST	.9	.27	760	8	48	.DA .D1	
							.30	808				
							.40	848				



Reference order | 11551.XX.XX.XX.ST.9.XX.XX

SLIM TUBE	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VaC	DIMM ▼	SKETCH
	11552	.01 40 x 40	.BK-BK	.15 .38	.ST	.9	.27	660	8	48	.DA .D1	
							.30	750				
							.40	827				
	11552	.02 60 x 60	.BK-BK	.15 .38	.ST	.9	.27	1320	15	48	.DA .D1	
							.30	1511				
							.40	1654				

Reference order | 11552XX.XX.XX.ST.9.XX.XX

SLIM WALL WASHER	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VaC	DIMM ▼	SKETCH
	11550	.06	.BK-BK	-	.ST	.9	.27	1100	15	48	.DA .D1	
							.30	1169				
							.40	1251				

Reference order | 11550.XX.XX.XX.ST.9.XX.XX

SLIM LENSES	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VaC	DIMM ▼	SKETCH
	11548	.06	.BK-BK	.15 .38	.ST	.9	.27	660	8	48	.DA .D1	
							.30	750				
							.40	827				
	11548	.12	.BK-BK	.15 .38	.ST	.9	.27	1320	15	48	.DA .D1	
							.30	1511				
							.40	1654				


Reference order | 11548.XX.XX.XX.ST.9.XX.XX

- Select Acoustic finishes



- Select Profile finishes





ACOUSTIC ALARIK SLIM

REF 230009.PN

PHOTOMETRY

PATRICIA



15º 24º 38º

PHOTOMETRY


LENSES



20º 40º 60º


PHOTOMETRY

LED MODULES



OPAL MICROPRISMATIC

INCLUDED




SB09.12 CONNECTION BOX


SC03.SA WIRE 3M.

COVER KIT




PROFILE






SLIM MOTION LENSES	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VaC	DIMM ▼	SKETCH
	11547	.06	.BK-BK	.15 .38	.ST	.9	.27	660	8	48	.DA .D1	
							.30	750				
							.40	827				

Reference order 11547.XX.XX.XX.ST.9.XX.XX

SLIM LED MODULES	REF.	DIMEN-SION ⬟	FINISH ●	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	VaC	DIMM ▼	SKETCH
	11549	.01	.BK-BK	.OP	.ST	.9	.27	558	9	48	.DA .D1	
							.30	560				
							.40	604				
	11549	.02	.BK-BK	.OP	.ST	.9	.27	1115	18	48	.DA .D1	
							.30	1120				
							.40	1208				
	11549	.03	.BK-BK	.OP	.ST	.9	.27	1670	24	48	.DA .D1	
							.30	1680				
							.40	1812				

Reference order 11549.XX.XX.XX.ST.9.XX.XX

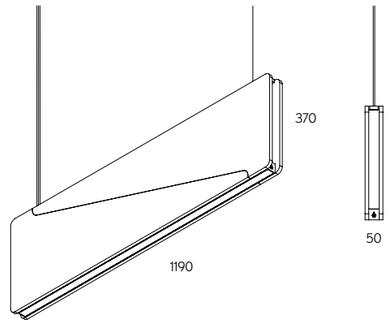

- Select Acoustic finishes



.50-51 .53-54 .53-50

- Select Profile finishes



WH BK



ACOUSTIC ALARIK SLIM


REF 230009.PN

ACOUSTIC PROPERTIES

ENVIRONMENTAL:	Comply with the requirements detailed in the BREEAM International, BREEAM-NOR v6.0 and LEED v4.1. Standards
FIRE TEST:	Classification B-s1, d0 and CTEDB-SI Compliant
BAFFLE THIKNESS:	190 Kg/m^3
BABBLE DENSITY:	12mm
SOUND ABSORPTION COEFFICIENT:	0,92 α_w


PHOTOMETRY

LED MODULES




OPAL MICROPRISMATIC

INCLUDED



SB09.12 CONNECTION BOX SC03.SA WIRE 3M. COVER KIT

PROFILE





FINISHES

● PROFILE COLORS

● LED MODULE COLORS

ACOUSTIC COLORS

LED MODULE COLORS

DIMENSIONS

⬟ LENGTHS mm.

1000

LIGHTING OPTIONS

■ BEAM OPTIONS

20º | 40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10


▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

2 x Suspension cables 3m
Connection Box
Cover Kit

new

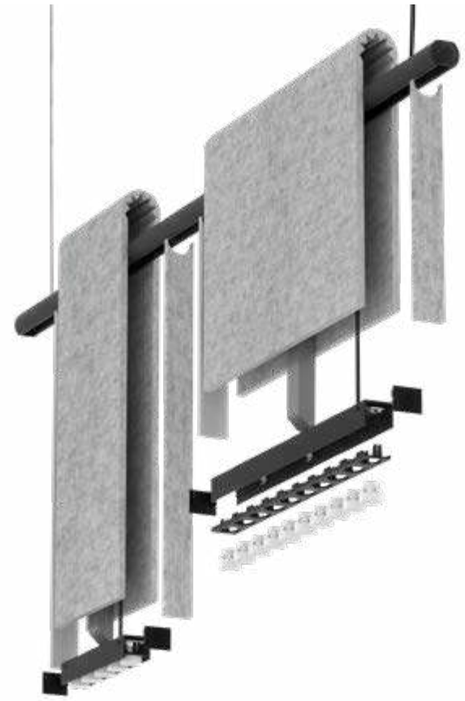



48V. REMOTE


.PN

PENDANT


ALUMINIUM PC | 0° | 0° | CRI ≥90 | IK06 | IP40 | LIFE 50000H | DIM OPTIONAL | | 48V. REMOTE | INDOOR | 220-240 V 50-60 Hz | CE

ACOUSTIC OKKO

REF 230003.PN

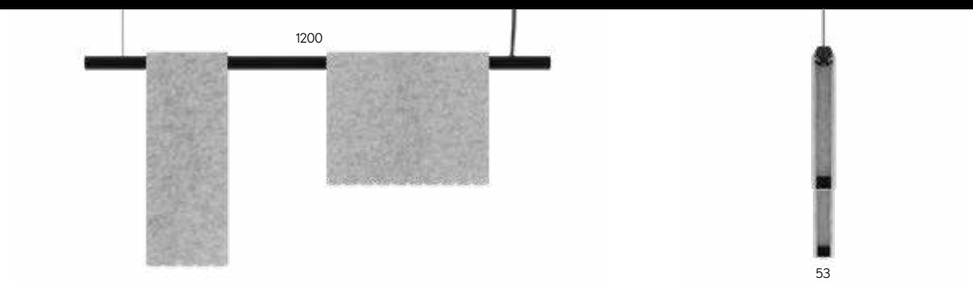

REFERENCE ORDER EXAMPLE | *EJEMPLO DE REFERENCIA*

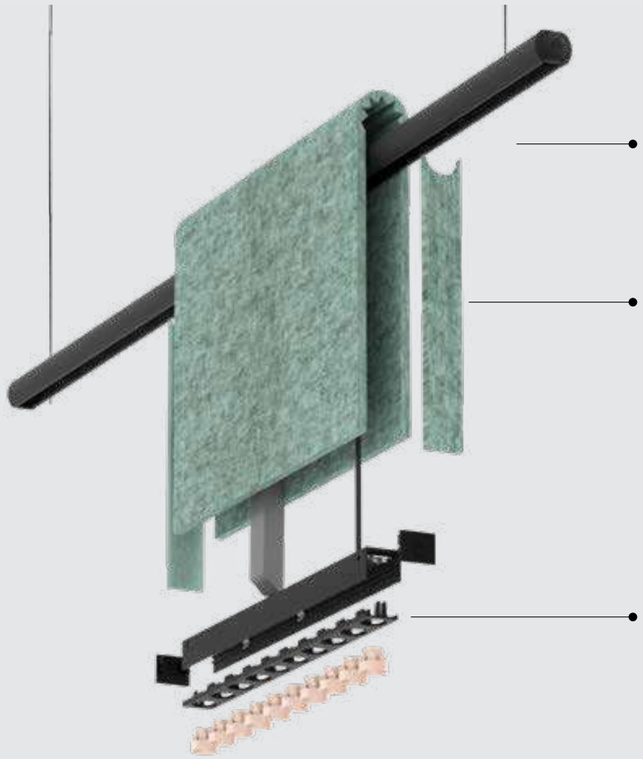

ACOUSTIC OKKO LINE PROFILE
PROFILE FINISH

ACOUSTIC OKKO LED MODULE
ACOUSTIC FINISH

ACOUSTIC OKKO LED MODULE
LED MODULE FINISH

ACOUSTIC OKKO LINE PROFILE

Reference order | 230003.01.PN.BK-BK

ACOUSTIC OKKO LED MODULES


Reference order | 140002.01.55-BK-CR.XX.ST.9.XX.XX

ACOUSTIC OKKO LINE	REF.	DIMENSION ⬟	FINISH ●
	**230003**	**.01** 1000mm	**.WH-WH** **.BK-BK**


POWER	DIMENSION ⬟	WATT
DR21002	**.01**	75
	.02	120
	.03	200

Reference order | 230003.01.PN.XX

Reference order | DR21002.XX

ACOUSTIC OKKO LED MODULES	REF.	DIMENSION ⬟	FINISH ●		OPTIC OPTIONS ■	POWER	CRI	LUMEN .27	LUMEN .30	LUMEN .40	WATT	mA	DIMM ▼	SKETCH
	**140001**	**.01**	**.50** **.51** **.55**	●	**.24** **.40** **.60**	**.ST**	**.9**	552	623	660	6	500	**.DA** **.D1**	 200 300 200 600
		**.02**												

Reference order | 140001.XX.XX-XX.XX.ST.9.XX.XX


ACOUSTIC OKKO LED MODULES	REF.	DIMENSION ⬟	FINISH ●		OPTIC OPTIONS ■	POWER	CRI	LUMEN .27	LUMEN .30	LUMEN .40	WATT	mA	DIMM ▼	SKETCH
	**140002**	**.01**	**.50** **.51** **.55**	●	**.24** **.40** **.60**	**.ST**	**.9**	1114	1245	1320	12	500	**.DA** **.D1**	 400 300 400 600
		**.02**												

Reference order | 140002.XX.XX-XX.XX.ST.9.XX.XX

.PN


PENDANT

- Select acoustic finishes



.50 .51 .55

- Select LED modules finishes

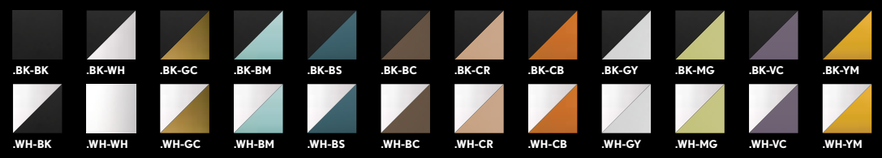

.BK-BK .BK-WH .BK-GC .BK-BM .BK-BS .BK-BC .BK-CR .BK-CB .BK-GY .BK-MG .BK-VC .BK-YM
.WH-BK .WH-WH .WH-GC .WH-BM .WH-BS .WH-BC .WH-CR .WH-CB .WH-GY .WH-MG .WH-VC .WH-YM



ACOUSTIC OKKO

REF 230003.PN

ACOUSTIC PROPERTIES


ENVIRONMENTAL:	Comply with the requirements detailed in the BREEAM International, BREEAM-NOR v6.0 and LEED v4.1. Standards
FIRE TEST:	Classification B-s1, d0 and CTEDB-SI Compliant
BAFFLE THIKNESS:	155Kg/m^3
BABBLE DENSITY:	9mm
SOUND ABSORPTION COEFFICIENT:	0,77 αw

PHOTOMETRY




20º 40º 60º

INCLUDED



CB0912 CONNECTION BOX | SC03.SA WIRE 3M. | COVER KIT

PROFILE



Ø37

new

FINISHES

● ACOUSTIC COLORS

● PROFILE COLORS

DIMENSIONS

⬟ DIAMETERS mm. | HEIGHT 38 mm

350 | 450 | 650 | 950 | 1250

LIGHTING OPTIONS

■ DIFFUSERS

SILICONE

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS


DALI | 1.10 | PUSH


▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

3 x Suspension cables 3m
1 x Feed Hose 3 x 0,75mm² (.125 1 Feed Hose 5 x 0,75mm²)
Electric system
Connection Box CB03 + Driver Box CB04.OP
Cover Kit

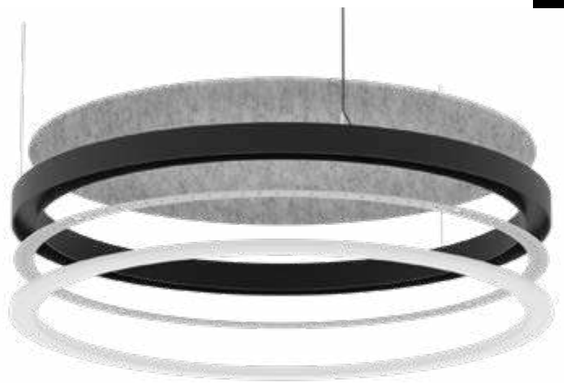



REMOTE

ON DEMAND

Special RAL Color
Number of switches
Emergency Lighting*
Motion Detection
Tunable White
RGB
Wireless Control Options (Casambi)

* Delivered separately
(not installed in luminaire).

.PN

PENDANT

ALUMINIUM SILICONE | 0° | 0° | CRI ≥90 | IK06 | IP40 | LIFE 50000H | DIM OPTIONAL | REMOTE | INDOOR | 220-240 V 50-60 Hz | CE

ACOUSTIC
ALBERTA SOFT

REF 230010.PN



Ø350mm | Ø450mm | Ø650mm | Ø950mm | Ø1250mm





50




ALBERTA SOFT	REF.	DIMENSION ⬟	FINISH ●		DIFFUSER ■	POWER	CRI	LUMEN .27	LUMEN .30	LUMEN .40	WATT	mA	DIMM ▼	SKETCH
	230010	.35	.50 .51	WH BK	.SI	.ST	.9	5280	5316	5844	56	700	.DA .PU .D1	 38 Int. Ø 286 Ext. Ø 350
	230010	.45	.50 .51	WH BK	.SI	.ST	.9	7086	7121	7747	70	700	.DA .PU .D1	 38 Int. Ø 386 Ext. Ø 450
	230010	.65	.50 .51	WH BK	.SI	.ST	.9	8785	9040	9687	86	700	.DA .PU .D1	 38 Int. Ø 586 Ext. Ø 650
	230010	.95	.50 .51	WH BK	.SI	.ST	.9	13298	13519	14703	129	700	.DA .PU .D1	 38 Ø INT. 886 Ø EXT. 950
	230010	.125	.50 .51	WH BK	.SI	.ST	.9	17816	18135	18118	172	700	.DA .PU .D1	 38 Ø INT. 1186 Ø EXT. 1250

Reference order | 230010.XX.PN.XX-XX.XX.ST.9.XX.XX

DRIVER BOX NON-DIMM		DRIVER BOX DIMMABLE		FINISH
 30 45 320	 300 Ø66	 30 45 400	 380 Ø66	●
CB09.32	CB08.30	CB09.40	CB09.38	

Reference order | CB09.XX.XX

- Select Acoustic finishes



.50 .51

- Select Profile finishes



.WH .BK



ACOUSTIC ALBERTA SOFT

REF 230010.PN

ACOUSTIC PROPERTIES


ENVIRONMENTAL:	Comply with the requirements detailed in the BREEAM International, BREEAM-NOR v6.0 and LEED v4.1. Standards
FIRE TEST:	Classification B-s1, d0 and CTEDB-SI Compliant
BAFFLE THIKNESS:	155Kg/m^3
BABBLE DENSITY:	9mm
SOUND ABSORPTION COEFFICIENT:	0,77 αw

PHOTOMETRY




SILICONE

INCLUDED




CB03
CONNECTION BOX




CB04
DRIVER BOX

SC03.SA
WIRE 3M.

PROFILE



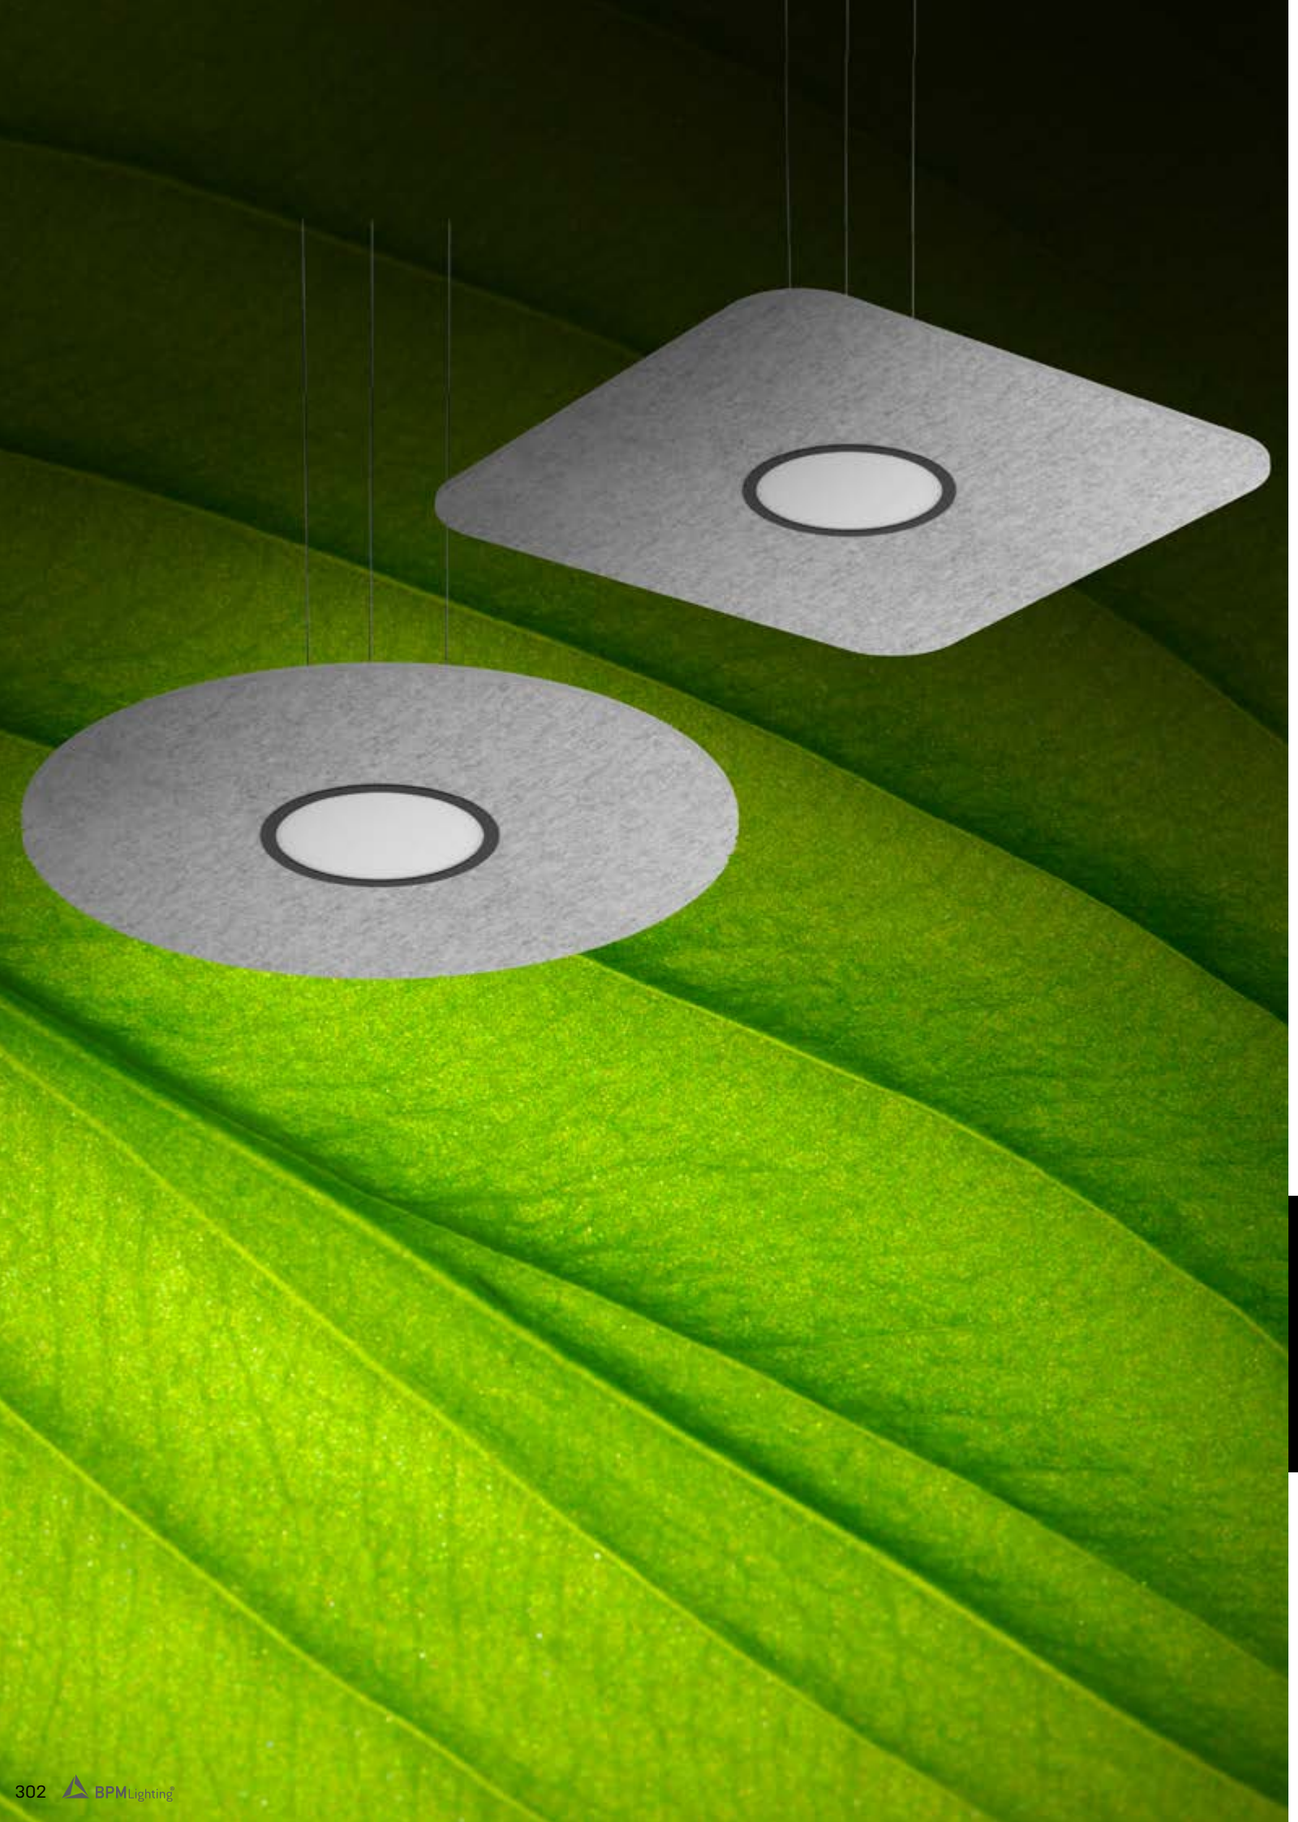

FINISHES

● ACOUSTIC COLORS

● PROFILE COLORS

DIMENSIONS

⬟ mm.

800 | 1000 | 1200

LIGHTING OPTIONS

■ DIFFUSERS

OPAL

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION


DOWN

LUMINAIRE INCLUDES

3 x Suspension cables 3m
NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
DIM DOWN: 1 x Feed Hose 5 x 0,75mm²
Connection box CB03 with luminaire's finish

new





ON DEMAND

Special RAL Color
Special Color Temperature
Emergency Lighting*
Motion Detection
RGB
CRI 80
Wireless Control Options (Casambi)

* Delivered separately
(not installed in luminaire).


.PN



PENDANT




ACOUSTIC RD | SQ
ALABAMA

REF 460001.PN | 460003.PN

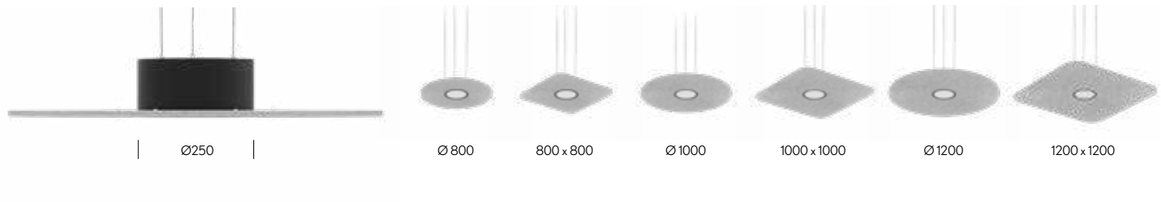


ALABAMA RD	REF.	DIMENSION ⬟	FINISH		DIFFUSER ■	POWER	CRI	LUMEN .27	LUMEN .30	LUMEN .40	WATT	mA	DIMM ▼	SKETCH
	460001	.01	●	WH BK	.OP	.ST	.9	-	1590	1650	12	500	.DA .PU .D1	 Ø800
		.02												 Ø1000
		.03												 Ø1200

Reference order | 460001.XX.PN.XX-XX.XX.XX.X.XX.XX

ALABAMA SQ	REF.	DIMENSION ⬟	FINISH		DIFFUSER ■	POWER	CRI	LUMEN .27	LUMEN .30	LUMEN .40	WATT	mA	DIMM ▼	SKETCH
	460003	.01	●	WH BK	.OP	.ST	.9	-	1590	1650	12	500	.DA .PU .D1	 800 800
		.02												1000 1000
		.03												1200 1200

Reference order | 460003.XX.PN.XX-XX.XX.XX.X.XX.XX

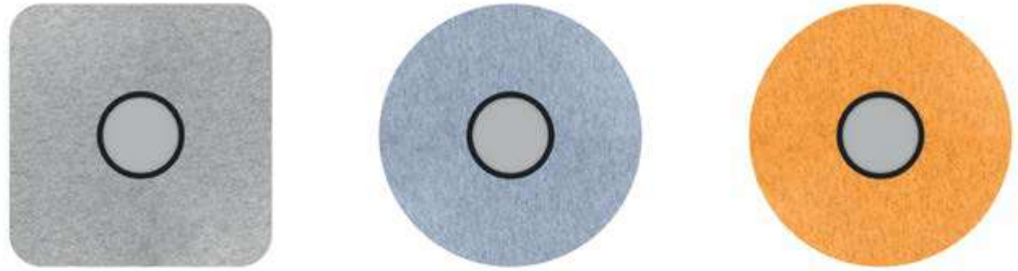





- Select Acoustic finishes



- Select Profile finishes





ACOUSTIC RD | SQ
ALABAMA

REF 460001.PN | 460003.PN

ACOUSTIC PROPERTIES


ENVIRONMENTAL:	Comply with the requirements detailed in the BREEAM International, BREEAM-NOR v6.0 and LEED v4.1. Standards
FIRE TEST:	Classification B-s1, d0 and CTEDB-SI Compliant
BAFFLE THIKNESS:	155Kg/m^3
BABBLE DENSITY:	9mm
SOUND ABSORPTION COEFFICIENT:	0,77 αw

PHOTOMETRY



OPAL

INCLUDED



CB03
CONNECTION BOX

SC03.SA
WIRE 3M.

PROFILE





FINISHES

● ACOUSTIC COLORS

● SPOTLIGHT COLORS

DIMENSIONS

⬟ DIAMETERS mm

800 | 1000 | 1200

LIGHTING OPTIONS

■ BEAM ANGLE

15º 25º 38º 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION


DOWN

LUMINAIRE INCLUDES

3 x Suspension cables 3m
1 x Feed Hose 3 x 0,75mm²
Connection box CB03 BK or WH finish

new





ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options (Casambi)

* Accesories are delivered separately (not installed in luminaire).

.PN

PENDANT

ALUMINIUM PC | 0° | 0° | CRI ≥90 | IK06 | IP40 | L80B10 50000H | DIM OPTIONAL | | REMOTE | INDOOR | 220-240 V 50-60 Hz | CE

ACOUSTIC RD | SQ
KLIMT FIX

REF 460002.PN | 460004.PN



Ø100




Ø800 | 800 x 800 | Ø1000 | 1000 x 1000 | Ø1200 | 1200 x 1200





ROUND



SQUARE

KIMT FIX RD	REF.	DIMENSION ⬟	FINISH		OPTIC OPTIONS ■	POWER	CRI	LUMEN .27	LUMEN .30	LUMEN .40	WATT	mA	DIMM ▼	SKETCH
	460002	.01	●	WH BK BK-GD WH-GD	.15 .25 .38 .60	.ST	.9	803	983	991	11	500	.DA .PU .D1	 Ø800
		.02												 Ø1000
		.03												 Ø1200

Reference order | 460002.XX.PN.XX-XX.XX.XX.X.XX.XX

KLIMT FIX SQ	REF.	DIMENSION ⬟	FINISH		OPTIC OPTIONS ■	POWER	CRI	LUMEN .27	LUMEN .30	LUMEN .40	WATT	mA	DIMM ▼	SKETCH
	460004	.01	●	WH BK BK-GD WH-GD	.15 .25 .38 .60	.ST	.9	803	983	991	11	500	.DA .PU .D1	 800 800
		.02												 1000 1000
		.03												 1200 1200

Reference order | 460004.XX.PN.XX-XX.XX.XX.X.XX.XX

PENDANT

- Select Acoustic finishes



.61 .60 .55 .53 .54 .57 .51 .50 .56 .52

- Select Spotlight finishes



.WH .BK .BK-GD .WH-GD




ACOUSTIC RD | SQ
KLIMT FIX

REF 460002.PN | 460004.PN

ACOUSTIC PROPERTIES


ENVIRONMENTAL:	Comply with the requirements detailed in the BREEAM International, BREEAM-NOR v6.0 and LEED v4.1. Standards
FIRE TEST:	Classification B-s1, d0 and CTEDB-SI Compliant
BAFFLE THIKNESS:	155Kg/m^3
BABBLE DENSITY:	9mm
SOUND ABSORPTION COEFFICIENT:	0,77 αw

PHOTOMETRY

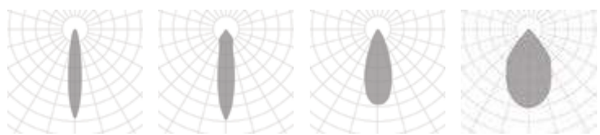

15º 25º 38º 60º

INCLUDED



CB03
CONNECTION BOX

SC03.SA
WIRE 3M.




FINISHES

- ACOUSTIC COLORS

DIMENSIONS

⬟ SIZES mm.


Ø80	Ø100	Ø120
80x80	100x100	120x120

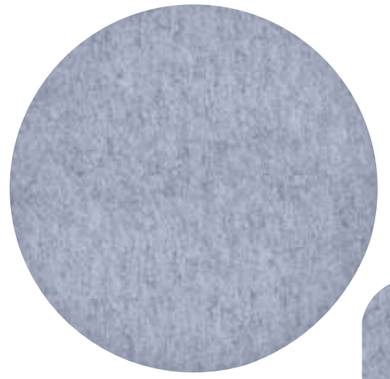





.SR



.SR



.PN



.PN

RD PANEL	REF.	DIMENSION ⬟	FINISH	SKETCH
	AC.RD	.01	●	 Ø80
		.02		 Ø100
		.03		 Ø120

Reference order AC.RD.XX | .SR .PN | .XX

SQ PANEL	REF.	DIMENSION ⬟	FINISH	SKETCH
	AC.SQ	.01	●	 80x80
		.02		 100x100
		.03		 120x120

Reference order AC.SQ.XX | .SR .PN | .XX

PENDANT | SURFACE

ACOUSTIC ACCESORIES
RD | SQ PANEL

REF AC.RD | AC.SQ

Select Acoustic finishes



.61 .60 .55 .53 .54 .57 .51 .50 .56 .52



FINISHES


- ACOUSTIC COLORS

DIMENSIONS

- SIZES mm

2400x300	2400x600



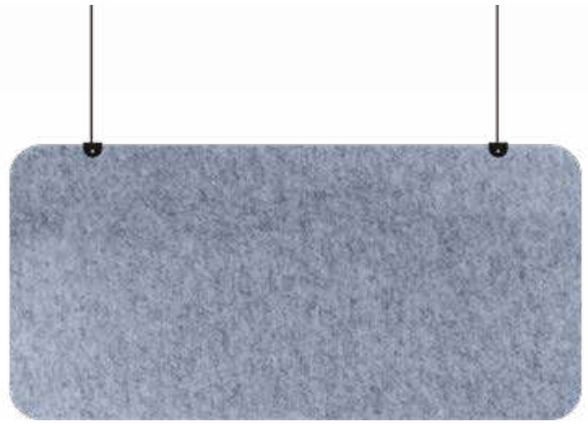



.PN



.SR

RD PANEL	REF.	DIMENSION ⬟	FINISH	SKETCH
	AC.VT	.01	●	300 / 2400
		.02		600 / 2400

Reference order | AC.VT.XX | .SR .PN | .XX

ACOUSTIC ACCESORIES
VT PANEL

REF AC.VT

Select Acoustic finishes



.61 .60 .55 .53 .54 .57 .51 .50 .56 .52



FINISHES

- COLORS

DIMENSIONS

- SIZES mm.

600x600 | 1200x600

new



RD PANEL	REF.	DIMENSION	FINISH	SKETCH
	AC.MD	.01	●	600 / 600
		.02		600 / 1200

Reference order | AC.MD.XX.RF.XX

.RF

RECESSED FRAME

ALUMINIUM PC · 0° · 0° · CRI ≥90 · IK08 · IP20 IP40 · LIFE 50000H · DIM OPTIONAL · INTEGRATED · INDOOR · 220-240 V 50-60 Hz · CE

ACOUSTIC ACCESORIES
MD PANEL

REF AC.MD.RF

Select Acoustic finishes

.61 .60 .55 .53 .54 .57 .51 .50 .56 .52

Avant-garde design




With flair and imagination, some products offer boundless possibilities. Our Tech lights bring you to a journey of simple designs that enhance every project and adapt to every need: Klimt, Martorell, Cube, among others...

Estética vanguardista

Con estilo e imaginación, algunos productos ofrecen grandes posibilidades. Esta colección te invita a un viaje de diseños sencillos que realzan cada proyecto y se adaptan a cada necesidad: Klimt, Martorell, Cube entre otros...

TECH

SURFACE

MARTORELL	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1 ▼	SKETCH
	**20115**	**.01** *2	●	**LED**	**.24 .32**	**.ST**	**.9**	**.27**	175	3	700	**.DA .PU .D1**	 85 Ø33
								.30	188				
								.40	199				
	**20115**	**.02**	●	**LED**	**.15 .24 .32**	**.ST**	**.9**	**.27**	470	8	700	**.DA .PU .D1**	 140 Ø40
								.30	498				
								.40	515				
	**20115**	**.03**	●	**LED**	**.24 .32**	**.ST**	**.9**	**.27**	1071	15	350	**.DA .PU .D1**	 150 Ø60
								.30	1156				
								.40	1198				

Reference order | 20115.XX ⬟ | .SR .PN | .XX.XX.ST.9.XX.XX ● ■ ▼

● Select finishes



*1 Remote driver when dimmable. *Driver remoto cuando es dimable.*
*2 Dimming options require the combination of a minimum of 2 luminaires. *Las opciones de regulación necesitan la combinación de un mínimo de 2 luminarias.*

• FINISHES

EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

15º | 24º | 32º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm (.02, .03)
Tunable White (.02, .03)
Honey Comb (.03)
Wireless Control Options
Special RAL Color



.SR
.PN
PENDANT | SURFACE

MARTORELL

REF 20115.PN | 20115.SR

INSTALLATIONS



.PN
PENDANT
·20115 MARTORELL | PN
Pag. 175

.TK
TRACKLIGHT
·20115 MARTORELL | TK
Pag. 175

.SR
SURFACE
·20115 MARTORELL | SR
Pag. 175

.RF
RECESSED FRAME
·20115 MARTORELL | RF
Pag. 175




.TR
TRIMLESS
·20115 MARTORELL | TR
Pag. 175



PHOTOMETRY



15º 24º 32º

MARTORELL MOVE	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1 ▼	SKETCH
	**20110**	**.01**	●	**LED**	**.24 .38**	**.ST**	**.9**	**.27**	167	3	700	**.DA .PU .D1**	
								.30	184				
								.40	206				
	**20110**	**.02**	●	**LED**	**.15 .24 .38**	**.ST**	**.9**	**.27**	465	9	700	**.DA .PU .D1**	
								.30	507				
								.40	548				
	**20110**	**.03**	●	**LED**	**.15 .24 .38 .60**	**.ST**	**.9**	**.27**	1058	15	350	**.DA .PU .D1**	
								.30	1096				
								.40	1231				

Reference order | 20110.XX.SR.XX.XX.ST.9.XX.XX

● Select finishes



*1 Remote driver when dimmable. *Driver remoto cuando es dimable.*
*2 Dimming options require the combination of a minimum of 2 luminaires. *Las opciones de regulación necesitan la combinación de un mínimo de 2 luminarias.*

● FINISHES

EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

24º 38º | 15º 24º 38º | 15º 24º 38º 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm (.02, .03)
Tunable White (.02, .03)
Honey Comb (.03)
Wireless Control Options



.SR

SURFACE

INSTALLATIONS



.SR
SURFACE

·20110 MARTORELL MOVE | SR
Pag. 175



.RF
RECESSED FRAME


·20110 MARTORELL MOVE | SR
Pag. 175




MARTORELL MOVE

REF 20110.SR

PHOTOMETRY

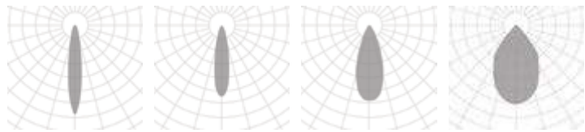

15º 24º 38º 60º

MARTORELL TUBE MOVE	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM OP. ▼	SKETCH
	**20138** Ø60x186	**.03**	●	**LED**	**.19** **.24** **.38**	.ST	.9	.27	796	10	500	**.DA** **.PU** **.D1**	
								.30	841				
								.40	929				

Reference order | ⬟ ● ■ ▼ 20138.03.SR.XX.XX.ST.9.XX.XX

● Select finishes



*1 Remote driver when dimmable. *Driver remoto cuando es dimable.*

• FINISHES

EXTERNAL COLOR



INTERNAL COLOR



DIMENSIONS

⬟ View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE

19º | 24º | 38º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options



MARTORELL
TUBE MOVE

REF 20138.SR



INSTALLATIONS



.SR
SURFACE

·20138 MARTORELL TUBE MOVE | SR
Pag. 175


.TK
TRACKLIGHT

·20138 MARTORELL TUBE MOVE | TK
Pag. 175


PHOTOMETRY





MARTORELL SQ	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1 ▼	SKETCH
	20132	.01	●	LED	.25 .38 .60	.ST	.9	.27	720	10	500	.DA .PU .D1	
								.30	759				
								.40	908				

Reference order ⬟ ● ■ ▼
20132.01.SR.XX.XX.ST.9.XX.XX

MARTORELL SQ2	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	20133	.01	●	LED	.25 .38 .60	.ST	.9	.27	1440	20	500	.DA .PU .D1	
								.30	1518				
								.40	1816				

Reference order ⬟ ● ■ ▼
20133.01.SR.XX.XX.ST.9.XX.XX

● Select finishes



*1 Remote driver when dimmable. *Driver remoto cuando es dimable.*

• FINISHES

EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE

25º | 38º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options
Special RAL Color



INSTALLATIONS



MARTORELL
SQ | SQ2


REF 20132.SR | REF 20133.SR



.SR
SURFACE

·20132 MARTORELL SQ | SR ·20133 MARTORELL SQ2 | SR
Pag. 175


PHOTOMETRY

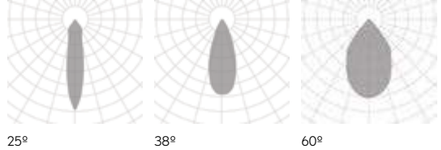

25º 38º 60º

MARTORELL TUBULAR 40	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1 ▼	SKETCH
	20192	**.01**	●	LED	**.20 .40**	**.ST**	**.9**	**.27**	808	14	300	**.DA .PU .D1**	 400 Ø40
								.30	820				
								.40	881				
	20192	**.02**	●	LED	**.20 .40**	**.ST**	**.9**	**.27**	808	14	300	**.DA .PU .D1**	 600 Ø40
								.30	820				
								.40	881				

Reference order | 20192.XX | .SR .PN | .XX.XX.ST.9.XX.XX

MARTORELL TUBULAR 60	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1 ▼	SKETCH
	20196	**.01**	●	LED	**.20 .40**	**.ST**	**.9**	**.27**	1662	21	350	**.DA .PU .D1**	 400 Ø60
								.30	1716				
								.40	1729				
	**20196**	**.02**	●	LED	**.20 .40**	**.ST**	**.9**	**.27**	1662	21	350	**.DA .PU .D1**	 600 Ø60
								.30	1716				
								.40	1729				

Reference order | 20196.XX | .SR .PN | .XX.XX.ST.9.XX.XX

● Select finishes



*1 Remote driver when dimmable. *Driver remoto cuando es dimable.*

● FINISHES

EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ View in family specifications

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

20º | 40º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

INCLUDED (.PN)

Suspension cable 1.5m
Connection box with luminaire's finish

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options
Special RAL Color



new

.SR
.PN
PENDANT | SURFACE

INSTALLATIONS



MARTORELL
TUBULAR 40 | TUBULAR 60

REF 20192.SR | 20196.SR | 20192.PN | 20196.PN

.PN
PENDANT

·20192 TUBULAR 40 | PN ·20196 TUBULAR 60 | PN
Pag. 175

.SR
SURFACE


·20192 TUBULAR 40 | PN ·20196 TUBULAR 60 | SR
Pag. 175

PHOTOMETRY



20º 40º



MARTORELL TILT	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1 ▼	SKETCH
	20195	.01	●	LED	.20 .40	.ST	.9	.27	164	3	700	.DA .PU .D1	
								.30	155				
								.40	188				

Reference order | 20195.01.SR.XX.XX.ST.9.XX.XX

● Select intenal - external finishes



.WH-WH .BK-BK

*1 Remote driver when dimmable. *Driver remoto cuando es dimable.*

• FINISHES

COLOR

□ ■

DIMENSIONS

⬟ View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE

20º | 40º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options
Special RAL Color



.SR
SURFACE

INSTALLATIONS



MARTORELL
TUBULAR TILT

REF 20195.SR






.SR
SURFACE

·20195 MARTORELL TUBULAR TILT | SR
Pag. 175

PHOTOMETRY



20º 40º

MARTORELL CRATE	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1 ▼	SKETCH
	**20176**	**.01**	●	**LED**	**.15 .24 .32**	**.ST**	**.9**	**.27**	470	8	700	**.DA .PU .D1**	
								.30	498				
								.40	515				
	**20176**	**.02**	●	**LED**	**.15 .24 .32**	**.ST**	**.9**	**.27**	940	16	700	**.DA .PU .D1**	
								.30	996				
								.40	1030				
	**20176**	**.03**	●	**LED**	**.15 .24 .32**	**.ST**	**.9**	**.27**	1410	24	700	**.DA .PU .D1**	
								.30	1494				
								.40	1545				

Reference order ⬟ ● ■ ▼

20176.XX.SR.XX.XX.ST.9.XX.XX

● Select finishes



*1 Remote driver when dimmable. *Driver remoto cuando es dimable.*

• FINISHES

EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

15º | 24º | 32º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options



INSTALLATIONS



MARTORELL CRATE

REF 20176.SR



.SR
SURFACE

·20176 MARTORELL CRATE | SR
Pag. 175




.RF
RECESSED FRAME

·20176 MARTORELL CRATE | RF
Pag. 175

PHOTOMETRY





MARTORELL MINI CRATE	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1 ▼	SKETCH
	20175	.01 *2	●	LED	.20 .40 .60	.ST	.9	.27	175	3	700	.DA .PU .D1	
								.30	188				
								.40	199				
	20175	.02	●	LED	.20 .40 .60	.ST	.9	.27	350	6	700	.DA .PU .D1	
								.30	276				
								.40	398				
	20175	.03	●	LED	.20 .40 .60	.ST	.9	.27	525	9	700	.DA .PU .D1	
								.30	564				
								.40	597				

Reference order ⬟ ● ■ ▼

20175.XX.SR.XX.XX.ST.9.XX.XX

● Select external-internal finishes


BK-BK

WH-WH

*1 Remote driver when dimmable. *Driver remoto cuando es dimable.*
*2 Dimming options require the combination of a minimum of 2 luminaires. *Las opciones de regulación necesitan la combinación de un mínimo de 2 luminarias.*

• FINISHES

COLOR

□ ■

DIMENSIONS

⬟ View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

20º | 40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Wireless Control Options



.SR

SURFACE

INSTALLATIONS



MARTORELL
MINI CRATE

REF 20175.SR



.SR
SURFACE

·20175 MARTORELL MINI CRATE | SR
Pag. 175

.RF
RECESSED FRAME

·20175 MARTORELL MINI CRATE | RF
Pag. 175

PHOTOMETRY


20º 40º 60º



CATLI	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1 ▼	SKETCH
	3010	.01	●	GU10	.GU	GU10				8			97 Ø80
				LED	.40 .60	.ST BPM50	.9	.27	480	7	350	.DA .PU .D1	
								.30	514				
								.40	565				

Reference order | 3010.01.SR.XX.XX.XX.X.XX.XX

CATLI SQ	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1 ▼	SKETCH
	3011	.01	●	GU10	.GU	GU10				8			97 80x80
				LED	.40 .60	.ST BPM50	.9	.27	480	7	350	.DA .PU .D1	
								.30	514				
								.40	565				

Reference order | 3011.01.SR.XX.XX.XX.X.XX.XX

- Select intenal - external finishes



.WH-WH .BK-BK .SA-SA

*1 Remote driver when dimmable. *Driver remoto cuando es dimable.*

• FINISHES

COLOR

DIMENSIONS

⬟ View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE / LAMP

40º | 60º | GU

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options



INSTALLATIONS



CATLI | CATLI SQ

REF 3010.SR | 3011.SR



.SR
SURFACE

·3010 CATLI | SR ·3011 CATLI SQ | SR
Pag. 175

.RF
RECESSED FRAME

·3010 CATLI | RF ·3011 CATLI SQ | RF
Pag. 175

PHOTOMETRY



40º 60º



KLIMT	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1 ▼	SKETCH
	20134	.01	●	LED	.15 .24 .38	.ST	.9	.27	395	8	700	.DA .PU .D1	 94 Ø75
								.30	497				
								.40	550				
	20134	.02	●	LED	.15 .24 .38 .60	.ST	.9	.27	803	11	500	.DA .PU .D1	 98 Ø100
								.30	983				
								.40	991				
	20134	.03	●	LED	.15 .24 .38 .60	.ST	.9	.27	1945	30	700	.DA .PU .D1	 144 Ø125
								.30	2073				
								.40	2311				

Reference order ⬟ ● ■ ▼

20134.XX.SR.XX.XX.ST.9.XX.XX

● Select external - internal finishes



BK-BK BK-GC WH-WH WH-GC

*1 Remote driver when dimmable. (.01 .02) *Driver remoto cuando es dimable (.01 .02).*

• FINISHES

EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

15º 24º 38º | 15º 24º 38º 60º | 15º 24º 38º 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options
Special RAL Color



.SR

SURFACE

INSTALLATIONS



.SR
SURFACE

·20134 KLIMT | SR
Pag. 175

.TK
TRACKLIGHT

·20134 KLIMT | TK
Pag. 175

.RF
RECESSED FRAME

·20134 KLIMT | RF
Pag. 175



KLIMT

REF 20134.SR

PHOTOMETRY



15º 24º 38º 60º

KLIMT FIX	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1 ▼	SKETCH
	**20135**	**.01**	●	**LED**	**.18 .24 .38**	**.ST**	**.9**	**.27**	395	8	700	**.DA .PU .D1**	 94 Ø75
								.30	497				
								.40	659				
	**20135**	**.02**	●	**LED**	**.18 .24 .38 .60**	**.ST**	**.9**	**.27**	803	11	500	**.DA .PU .D1**	 98 Ø100
								.30	983				
								.40	991				
	**20135**	**.03**	●	**LED**	**.18 .24 .38 .60**	**.ST**	**.9**	**.27**	1945	30	700	**.DA .PU .D1**	 144 Ø125
								.30	2073				
								.40	2311				

Reference order | 20135.XX.SR.XX.XX.ST.9.XX.XX

● Select external - internal finishes



BK-BK BK-GC WH-WH WH-GC

*1 Remote driver when dimmable. (.01 .02) *Driver remoto cuando es dimable (.01 .02).*

● FINISHES

EXTERNAL COLOR



INTERNAL COLOR



DIMENSIONS

⬟ View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

18º 24º 38º | 18º 24º 38º 60º | 18º 24º 38º 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options
Special RAL Color



new

.SR

SURFACE

INSTALLATIONS



.SR
SURFACE

·20135 KLIMT FIX | SR
Pag. 175

.RF
RECESSED FRAME

·20135 KLIMT FIX | RF
Pag. 175



KLIMT FIX


REF 20135.SR

PHOTOMETRY



18º 24º 38º 60º



GEO	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1 ▼	SKETCH
	30511	.01	●	LED	.15 .24 .38	.ST	.9	.27	498	8	700	.DA .PU .D1	 120 Ø82
								.30	513				
								.40	622				
	30511	.02	●	LED	.15 .24 .38 .60	.ST	.9	.27	1075	14	350	.DA .PU .D1	 145 Ø102
								.30	1114				
								.40	1319				
	30511	.03	●	LED	.15 .24 .38 .60	.ST	.9	.27	1856	30	700	.DA .PU .D1	 170 Ø125
								.30	2031				
								.40	2529				

Reference order | ⬟ ● ■ ▼ 30511.XX.SR.XX.XX.ST.9.XX.XX

• FINISHES

COLORS

□ ■

DIMENSIONS

⬟ View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

15º 24º 38º | 15º 24º 38º 60º | 15º 24º 38º 60º

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

new



● Select external - internal finishes



BK-BK WH-WH

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options
Special RAL Color

*1 Remote driver when dimmable. (.01 .02) *Driver remoto cuando es dimable (.01 .02).*

INSTALLATIONS



GEO

REF 30511.SR





.SR
SURFACE

·30511 GEO | SR
Pag. 175

.TK
TRACKLIGHT

·30511 GEO | TK
Pag. 175


.RF
RECESSED FRAME

·30511 GEO | RF
Pag. 175


PHOTOMETRY




15º 24º 38º 60º

CUBE SQ	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM OP. ▼	SKETCH
	8201	.01	●	LED	.24 .40 .60	.ST	.9	.27	738	11	350	.DA .PU .D1	
								.30	862				
								.40	929				

Reference order | 8201.01.SR.XX.XX.ST.9.XX.XX

CUBE SQ2	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM OP. ▼	SKETCH
	8202	.01	●	LED	.24 .40 .60	.ST	.9	.27	1476	22	350	.DA .PU .D1	
								.30	1724				
								.40	1857				

Reference order | 8202.01.SR.XX.XX.ST.9.XX.XX

CUBE SQ3	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM OP. ▼	SKETCH
	8203	.01	●	LED	.24 .40 .60	.ST	.9	.27	2214	33	350	.DA .PU .D1	
								.30	2586				
								.40	2786				

Reference order | 8203.01.SR.XX.XX.ST.9.XX.XX

● Select external - internal finishes



• FINISHES

EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ View in family specifications

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

24º | 40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options



.SR

SURFACE

INSTALLATIONS



CUBE
SQ | SQ2 | SQ3

REF 8201.SR | REF 8202.SR | REF 8203.SR



.SR
SURFACE

·8201 CUBE ·8202 CUBE 2 ·8203 CUBE 3 | SR
Pag. 175

.RF
RECESSED FRAME


·8201 CUBE ·8202 CUBE 2 ·8203 CUBE 3 | RF
Pag. 175

.TR
TRIMLESS


·8201 CUBE ·8202 CUBE 2 ·8203 CUBE 3 | TR
Pag. 175

PHOTOMETRY




GRAN CUBE SQ	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM OP. ▼	SKETCH
	8201	.02	●	LED	.20 .40 .60	.ST	.9	.27	1242	19	500	.DA .PU .D1	
								.30	1345				
								.40	1867				

Reference order | 8201.02.SR.XX.XX.ST.9.XX.XX

GRAN CUBE SQ2	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM OP. ▼	SKETCH
	8202	.02	●	LED	.20 .40 .60	.ST	.9	.27	2484	38	500	.DA .PU .D1	
								.30	2670				
								.40	3734				

Reference order | 8202.02.SR.XX.XX.ST.9.XX.XX

GRAN CUBE SQ3	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM OP. ▼	SKETCH
	8203	.02	●	LED	.20 .40 .60	.ST	.9	.27	3726	58	500	.DA .PU .D1	
								.30	4035				
								.40	5601				

Reference order | 8203.02.SR.XX.XX.ST.9.XX.XX

● Select external - internal finishes



• FINISHES

EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ View in family specifications

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

24º | 40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options



.SR

SURFACE

INSTALLATIONS



GRAN CUBE
SQ | SQ2 | SQ3

REF 8201.SR | REF 8202.SR | REF 8203.SR

.SR
SURFACE

·8201 CUBE ·8202 CUBE 2 ·8203 CUBE 3 | SR
Pag. 175

.RF
RECESSED FRAME

·8201 CUBE ·8202 CUBE 2 ·8203 CUBE 3 | RF
Pag. 175

.TR
TRIMLESS


·8201 CUBE ·8202 CUBE 2 ·8203 CUBE 3 | TR
Pag. 175

PHOTOMETRY



CUBE TUBE	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM OP. ▼	SKETCH
	9050	.01	●	LED	.15 .40 .60	.ST	.9	.27 .30 .40	567 590 592	8	350	.DA .PU .D1	 185 Ø86
	9050	.02	●	LED	.15 .40 .60	.ST	.9	.27 .30 .40	567 590 592	8	350	.DA .PU .D1	 250 Ø86
	9050	.03	●	LED	.15 .40 .60	.ST	.9	.27 .30 .40	567 590 592	8	350	.DA .PU .D1	 350 Ø86
	9050	.04	●	LED	.15 .40 .60	.ST	.9	.27 .30 .40	567 590 592	8	350	.DA .PU .D1	 450 Ø86

Reference order | 9050.XX | .SR .PN | .XX.XX.ST.9.XX.XX

CUBE TUBE	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	9052	.01	.●	LED	.24 .40 .60	.ST	.9	.27 .30 .40	1109 1597 1664	18	500	.DA .PU .D1	175 Ø120

Reference order | 9052.01 | .SR .PN | .XX.XX.ST.9.XX.XX

● Select finishes



● FINISHES

EXTERNAL COLOR



INTERNAL COLOR



DIMENSIONS

⬟ View in family specifications

.01 | .02 | .03 | .04

LIGHTING OPTIONS

■ BEAM ANGLE

15º 40º 60º | 24º 40º 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

INCLUDED (.PN)

Suspension cable 1.5m
Connection box with luminaire's finish

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options (Casambi)
Special RAL Color



INSTALLATIONS



CUBE TUBE

REF 9050.SR | 9052.SR | 9050.PN | 9052.PN



.PN
PENDANT

· 9050 | 9052 CUBE TUBE | PN
Pag. 175

.TK
TRACKLIGHT

· 9050 | 9052 CUBE TUBE | TK
Pag. 175



.SR
SURFACE

· 9050 | 9052 CUBE TUBE | SR
Pag. 175

PHOTOMETRY



CUBE TUBE MOVE	REF.	DIMENSIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM OP. ▼	SKETCH
	9051	.01	●	LED	.15 .40 .60	.ST	.9	.27 .30 .40	633 745 968	11	500	.DA .PU .D1	 191 Ø100
	9051	.02	●	LED	.15 .40 .60	.ST	.9	.27 .30 .40	633 745 968	11	500	.DA .PU .D1	 250 Ø100
	9051	.03	●	LED	.15 .40 .60	.ST	.9	.27 .30 .40	633 745 968	11	500	.DA .PU .D1	 350 Ø100
	9051	.04	●	LED	.15 .40 .60	.ST	.9	.27 .30 .40	633 745 968	11	500	.DA .PU .D1	 450 Ø100

Reference order | 9051.XX | .SR .PN | .XX.XX.ST.9.XX.XX

CUBE TUBE MOVE	REF.	DIMENSIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM OP. ▼	SKETCH
	9053	.01	●	LED	.24 .40 .60	.ST	.9	.27 .30 .40	1359 1499 1734	20	500	.DA .PU .D1	165 Ø140

Reference order | 9053.01 | .SR .PN | .XX.XX.ST.9.XX.XX

● Select finishes



● FINISHES

EXTERNAL COLOR



INTERNAL COLOR



DIMENSIONS

⬟ View in family specifications

.01 | .02 | .03 | .04

LIGHTING OPTIONS

■ BEAM ANGLE

15º 40º 60º | 24º 40º 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

INCLUDED (.PN)

Suspension cable 1.5m
Connection box with luminaire's finish

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options
Special RAL Color



.SR
.PN
PENDANT | SURFACE

INSTALLATIONS



CUBE
TUBE MOVE

REF 9051.SR | 9053.SR | 9051.PN | 9053.PN



.PN
PENDANT



· 9051 | 9053 TUBE MOVE | PN
Pag. 175

.SR
SURFACE



· 9051 | 9053 TUBE MOVE | SR
Pag. 175

PHOTOMETRY



LUK FREIR	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	**20018**	**.01**	●	**.LED**	**.18 .40 .60**	**.ST**	**.9**	**.27**	830	9	350	**.DA .PU .D1**	
								.30	845				
								.40	895				
	**20018**	**.02**	●	**.LED**	**.24 .40 .60**	**.ST**	**.9**	**.27**	1271	16	500	**.DA .PU .D1**	
								.30	1616				
								.40	1682				

Reference order | 20018XX.SR.XX.XX.ST.9.XX.XX

LUK FREIR 2	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	**20019**	**.01**	●	**.LED**	**.18 .40 .60**	**.ST**	**.9**	**.27**	1660	18	350	**.DA .PU .D1**	
								.30	1690				
								.40	1790				
	**20019**	**.02**	●	**.LED**	**.24 .40 .60**	**.ST**	**.9**	**.27**	2542	32	500	**.DA .PU .D1**	
								.30	3232				
								.40	3364				

Reference order | 20019.XX.SR.XX.XX.ST.9.XX.XX

● Select finishes



• FINISHES

COLORS

DIMENSIONS

⬟ View in family specifications

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

18º 40º 60º | 24º 40º 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options



.SR

SURFACE

INSTALLATIONS



LUK
FREIR | FREIR 2

REF 20018.SR | REF 20019.SR



.SR
SURFACE

·20018 LUK FREIR ·20019 LUK FREIR 2 | SR
Pag. 175

.RF
RECESSED FRAME


·20018 LUK FREIR ·20019 LUK FREIR 2 | RF
Pag. 175

.TR
TRIMLESS

·20018 LUK FREIR ·20019 LUK FREIR 2 | TR
Pag. 175

PHOTOMETRY



LUK CRUSADER	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM OP. ▼	SKETCH
	20082	.01	●	LED	.24 .40 .60	.ST	.9	.27	1633	20	700	.DA .PU .D1	 172 Ø120
								.30	2138				
								.40	2228				

Reference order | 20082.01.SR.XX.XX.ST.9.XX.XX

• FINISHES

COLORS

DIMENSIONS

⬟ View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE

24º | 40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION


DOWN



● Select finishes



BK-BK WH-WH WH-BK



.SR
SURFACE

LUK CRUSADER

REF 20082.SR



INSTALLATIONS



.SR
SURFACE

·20082 LUK CRUSADER | SR
Pag. 175

.TK
TRACKLIGHT


·20082 LUK CRUSADER | TK
Pag. 175

PHOTOMETRY




24º 40º 60º




LUK HAWKEYE	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM OP. ▼	SKETCH
	20083	.01	●	LED	.24 .40 .60	.ST	.9	.27	1633	20	700	.DA .PU .D1	
								.30	2138				
								.40	2228				

Reference order | 20083.01.SR.XX.XX.ST.9.XX.XX


LUK HAWKEYE 2	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM OP. ▼	SKETCH
	20084	.01	●	LED	.24 .40 .60	.ST	.9	.27	3266	40	700	.DA .PU .D1	
								.30	4276				
								.40	4456				

Reference order | 20084.01.SR.XX.XX.ST.9.XX.XX

● Select finishes



BK-BK WH-WH WH-BK



• FINISHES

COLORS

DIMENSIONS

⬟ View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE

24º | 40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN



.SR

SURFACE

INSTALLATIONS



LUK
HAWKEYE | HAWKEYE 2
REF 20083.SR | 20084.SR

.SR
SURFACE

·20083 HAWKEYE ·20084 HAWKEYE 2 | SR
Pag. 175

.TK
TRACKLIGHT

·20083 HAWKEYE ·20084 HAWKEYE 2 | TK
Pag. 175


PHOTOMETRY



24º 40º 60º






ORACLE	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	**20087**	**.01**	●	**LED**	**.20** **.40** **.60**	**.ST**	**.9**	**.27**	1079	14	500	**.DA** **.PU** **.D1**	
								.30	1216				
								.40	1273				

Reference order | 20087.01 | .SR .PN | .XX.XX.ST.9.XX.XX

● Select finishes

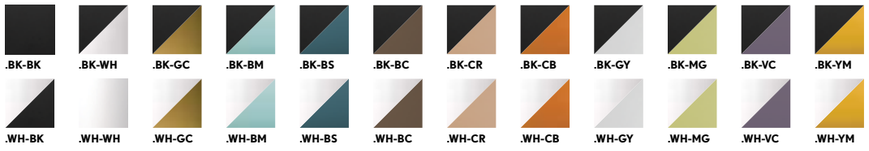

• FINISHES

EXTERNAL COLOR



INTERNAL COLOR



DIMENSIONS

⬟ View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE

20º | 40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

INCLUDED (.PN)

Suspension cable 1.5m
Connection box with luminaire's finish

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options



INSTALLATIONS



ORACLE

REF 20087.SR | 20087.PN



.PN
PENDANT

·20087 ORACLE | PN
Pag. 175


.TK
TRACKLIGHT

·20087 ORACLE | TK
Pag. 175


.SR
SURFACE

·20087 ORACLE | SR
Pag. 175

PHOTOMETRY

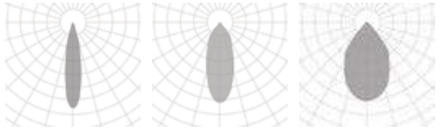



FACE TUBULAR MOVE	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1 ▼	SKETCH
	20205	.01	●	LED	.38	.ST	.9	.27	480	8	350	.DA .PU .D1	
								.30	493				
								.40	496				

Reference order | 20205.01.SR.XX.XX.ST.9.XX.XX

- Select external-internal finishes


.WH-WH .BK-BK .GC-GC .CB-CB

*1 Remote driver when dimmable. *Driver remoto cuando es dimable.*

• FINISHES

COLORS



DIMENSIONS

⬟ View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE

38º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Wireless Control Options
Special RAL Color



new

.SR

SURFACE

INSTALLATIONS



FACE
TUBULAR MOVE

REF 20205.SR



.SR
SURFACE

·20205 FACE TUBULAR MOVE | SR
Pag. 175

.RF
RECESSED FRAME


·20205 FACE TUBULAR MOVE | RF
Pag. 175

PHOTOMETRY



38º



FACE TUBULAR	REF.	DIMEN-SIONS ⬟	FINISHES	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1 ▼	SKETCH
	**20205**	**.01** 300 x Ø40	●	LED	**.40**	.ST	.9	.27	633	11	500	.DA .PU .D1	 300 Ø40
								.30	678				
								.40	701				
	**20205**	**.02** 400x Ø40	●	LED	**.40**	.ST	.9	.27	633	11	500	.DA .PU .D1	 400 Ø40
								.30	678				
								.40	701				

Reference order | ⬟ ● ■ ▼ 20205.XX.PN.XX.XX.ST.9.XX.XX

- Select external-internal finishes


.WH-WH .BK-BK .GC-GC .CB-CB

*1 Remote driver when dimmable. *Driver remoto cuando es dimable.*

• FINISHES

COLORS

DIMENSIONS

⬟ View in family specifications

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

40º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

INCLUDED

Suspension cable 1.5m
Connection box with luminaire's finish

ON DEMAND

Wireless Control Options
Special RAL Color

new



.PN
PENDANT

INSTALLATIONS



FACE TUBULAR


REF 20205.PN



.PN
PENDANT

·20205 FACE TUBULAR | PN
Pag. 175

PHOTOMETRY

24º

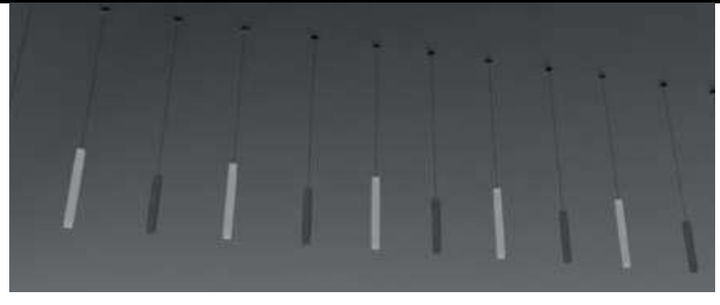

FACE TUBULAR	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1 ▼	SKETCH
	**20207**	**.01** 300 x Ø60	●	LED	**.40**	.ST	.9	.27	1059	16	700	.DA .PU .D1	 300 Ø60
								.30	1062				
								.40	1108				
	**20207**	**.02** 400 x Ø60	●	LED	**.40**	.ST	.9	.27	1059	16	700	.DA .PU .D1	 400 Ø60
								.30	1062				
								.40	1108				

Reference order | 20207.XX.PN.XX.XX.ST.9.XX.XX

● Select external-internal finishes


.WH-WH .BK-BK .GC-GC .CB-CB

*1 Remote driver when dimmable. *Driver remoto cuando es dimable.*

• FINISHES

COLORS



DIMENSIONS

⬟ View in family specifications

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

40º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

INCLUDED

Suspension cable 1.5m
Connection box with luminaire's finish

ON DEMAND

Wireless Control Options
Special RAL Color

new



.PN
PENDANT

PENDANT

INSTALLATIONS



FACE
TUBULAR SPAC

REF 20207.PN




.PN
PENDANT


·20207 FACE TUBULAR SPAC | PN
Pag. 175

PHOTOMETRY



40º

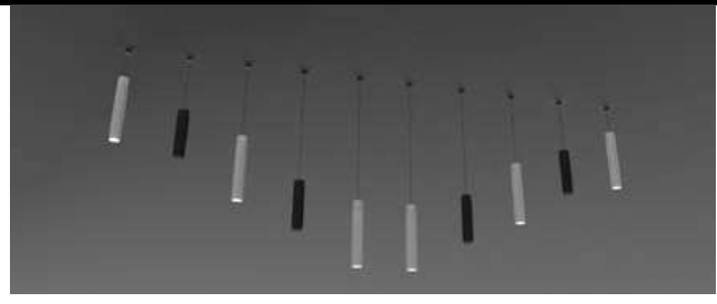

FACE KIERA	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1 ▼	SKETCH
	**20204**	**.01** 57 x Ø56	●	LED	**.38**	**.ST**	**.9**	**.27**	411	5	500	**.DA .PU .D1**	 57 Ø56
								.30	447				
								.40	488				
	**20204**	**.02** 81 x Ø75	●	LED	**.38**	**.ST**	**.9**	**.27**	572	8	700	**.DA .PU .D1**	 81 Ø75
								.30	574				
								.40	594				
	**20204**	**.03** 115 x Ø100	●	LED	**.38**	**.ST**	**.9**	**.27**	1396	18	500	**.DA .PU .D1**	 115 Ø100
								.30	1655				
								.40	1962				

Reference order ⬟ ● ■ ▼

20204.XX.PN.XX.XX.ST.9.XX.XX

● Select external-internal finishes


BK-BK

WH-WH

*1 Remote driver when dimmable. *Driver remoto cuando es dimable.*

• FINISHES

COLORS



DIMENSIONS

⬟ View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

38º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

INCLUDED

Suspension cable 1.5m
Connection box with luminaire's finish

ON DEMAND

Wireless Control Options



new

.PN

PENDANT

INSTALLATIONS



FACE
KIERA

REF 20204.PN






.PN
PENDANT

·20204 FACE KIERA | PN
Pag. 175

PHOTOMETRY



38º

KIERA CEMENT	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1 ▼	SKETCH
	**20208**	**.01** 57 x Ø56	●	LED	**.38**	**.ST**	**.9**	**.27**	411	5	500	**.DA .PU .D1**	 197 Ø56
								.30	447				
								.40	488				
	**20208**	**.02** 81 x Ø75	●	LED	**.38**	**.ST**	**.9**	**.27**	572	7	700	**.DA .PU .D1**	 269 Ø75
								.30	574				
								.40	594				
	**20208**	**.03** 115 x Ø100	●	LED	**.38**	**.ST**	**.9**	**.27**	1396	18	500	**.DA .PU .D1**	 342 Ø100
								.30	1655				
								.40	1962				

Reference order ⬟ ● ■ ▼

20208.XX.PN.XX.XX.ST.9.XX.XX

● Select finishes



.BK-GY

*1 Remote driver when dimmable. *Driver remoto cuando es dimable.*

• FINISHES

COLORS



DIMENSIONS

⬟ View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

38º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

INCLUDED

Suspension cable 1.5m
Connection box with luminaire's finish

ON DEMAND

Wireless Control Options




new

.PN

PENDANT

INSTALLATIONS



FACE
KIERA CEMENT

REF 20208.PN






.PN
PENDANT

·20208 FACE KIERA CEMENT | PN
Pag. 175

PHOTOMETRY



38º

FACE IRIS	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1 ▼	SKETCH
	**20203**	**.01** 72 x Ø105	●	LED	**.60**	**.ST**	**.9**	**.27**	817	10	500	**.DA .PU .D1**	
								.30	852				
								.40	962				
	**20203**	**.02** 91 x Ø170	●	LED	**.60**	**.ST**	**.9**	**.27**	1504	20	500	**.DA .PU .D1**	
								.30	1811				
								.40	1858				
	**20203**	**.03** 112 x Ø270	●	LED	**.60**	**.ST**	**.9**	**.27**	1837	29	700	**.DA .PU .D1**	
								.30	2264				
								.40	2373				

Reference order | ⬟ ● ■ ▼
20203.XX.PN.XX.XX.ST.9.XX.XX

● Select external-internal finishes



*1 Remote driver when dimmable. *Driver remoto cuando es dimable.*

● FINISHES

COLORS



DIMENSIONS

⬟ View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

INCLUDED

Suspension cable 1.5m
Connection box with luminaire's finish

ON DEMAND

Wireless Control Options
Special RAL Color



new

.PN

PENDANT

INSTALLATIONS



FACE
IRIS

REF 20203.PN



.PN
PENDANT

·20203 FACE IRIS | PN
Pag. 175



PHOTOMETRY



60º





SUBLIM	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1 ▼	SKETCH
	20206	**.01** 270 x 40 x 40	●	LED	**.36**	**.ST**	**.9**	**.27**	467	9	350	**.DA .PU .D1**	 270 40
								.30	471				
								.40	511				
	20206	**.02** 400 x 40 x 40	●	LED	**.36**	**.ST**	**.9**	**.27**	467	9	350	**.DA .PU .D1**	 400 40
								.30	471				
								.40	511				
	**20206**	**.03** 1000 x 40 x 40	●	LED	**.36**	**.ST**	**.9**	**.27**	467	9	350	**.DA .PU .D1**	 1000 40
								.30	471				
								.40	511				

Reference order ⬟ ● ■ ▼

20206.XX.PN.XX.XX.ST.9.XX.XX

● Select external-internal finishes



.WH-WH .BK-BK .BC-BC .CB-CB

*1 Remote driver when dimmable. *Driver remoto cuando es dimable.*

● FINISHES

COLORS



DIMENSIONS

⬟ View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

36º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

INCLUDED

Suspension cable 1.5m
Connection box with luminaire's finish

ON DEMAND

Wireless Control Options
Special RAL Color



new

.PN

PENDANT

INSTALLATIONS



SUBLIM

REF 20206.PN



.PN
PENDANT

·20206 MARTORELL | PN
Pag. 175

PHOTOMETRY



36º



GALANTA BONETE	REF.	DIMENSIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1 ▼	SKETCH
	**20222**	**.01** 70 x Ø80	●	LED	**.OP**	**.ST**	**.9**	**.27**	419	6	500	**.DA .PU .D1**	 70 Ø80
								.30	474				
								.40	510				

Reference order | 20222.XX.PN.XX.XX.ST.9.XX.XX

● Select finishes



.WH-WH .BK-BK .GC-GC .BM-BM .BS-BS .BC-BC .CR-CR .CB-CB .GY-GY .MG-MG .VC-VC .YM-YM

*1 Remote driver when dimmable. *Driver remoto cuando es dimable.*

• FINISHES

COLORS

DIMENSIONS

⬟ View in family specifications

.01

LIGHTING OPTIONS

■ DIFFUSER

OPAL | -

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

INCLUDED

Suspension cable 1.5m
Connection box with luminaire's finish

ON DEMAND

Wireless Control Options

new



.PN
PENDANT

INSTALLATIONS



GALANTA
BONETE

REF 20222.PN



.PN
PENDANT


·20222 GALANTA BONETE | PN
Pag. 175

PHOTOMETRY



OPAL



VENISE	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	**410011**	**.01**	●	LED	**.OP**	**.ST**	**.9**	**.30**	583	12	500	**.DA .PU .D1**	 75 Ø200
	**410011**	**.02**	●	LED	**.OP**	**.ST**	**.9**	**.30**	1302	20	500	**.DA .PU .D1**	 105 Ø320
	**410011**	**.03**	●	LED	**.OP**	**.ST**	**.9**	**.30**	1343	30	700	**.DA .PU .D1**	 135 Ø450
	**410011**	**.04**	●	LED	**.OP**	**.ST**	**.9**	**.30**	2111	45	1050	**.DA .PU .D1**	 165 Ø600

Reference order | 410011.XX.PN.XX.XX.ST.9.XX.XX

● Select finishes



.BK-BK .BK-WH .BK-GC .BK-BM .BK-BS .BK-BC .BK-CR .BK-CB .BK-GY .BK-MG .BK-VC .BK-YM

● FINISHES

EXTERNAL COLOR

■

INTERNAL COLOR

DIMENSIONS

⬟ View in family specifications

.01

LIGHTING OPTIONS

■ DIFFUSER

OPAL | -

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

3000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

INCLUDED

Suspension cable 1.5m
Connection box with luminaire's finish

new



.PN
PENDANT

INSTALLATIONS

VENISE

REF 410011.PN



.PN
PENDANT

·410011 VENISE | PN
Pag. 175

PHOTOMETRY



OPAL



The invisible star

El protagonista invisible

The imperceivable force behind the project. An entity in its own right, whose only purpose is to enhance the ambiance, never draw attention to itself. Meet the White Structural Collection, a minimalist design featuring Crismosil , an innovative, exclusive material that integrates seamlessly in any space.


Ser el foco de atención sin ser visto. Una función en sí misma, con el único fin de dejar todo el protagonismo al espacio, nunca a la luminaria. Así se presenta la colección White Structural, resultado de un diseño minimalista y fruto de la producción exclusiva con Crismosil, un innovador material que permite una completa integración en los espacios.




STRUCTURAL

SURFACE

NOCTUA	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1 ▼	SKETCH
	10103	.01	●	GU5.3	.G5	GU5.3	-			8	-		
				GU10	.GU	GU10							
				LED	.40 .60	.ST BPM50	.9	.27	480	7	350	.DA .PU .D1	
								.30	514				
								.40	565				
						.HI BPM300		.27	686	10	500		
								.30	734				
								.40	810				

NOCTUA	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1 ▼	SKETCH
	10103	.02	●	GU5.3	.G5	GU5.3	-			8	-		
				GU10	.GU	GU10							
				LED	.40 .60	.ST BPM50	.9	.27	480	7	350	.DA .PU .D1	
								.30	514				
								.40	565				
						.HI BPM300		.27	686	10	500		
								.30	734				
								.40	810				

NOCTUA	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10103	.03	●	GU5.3	.G5	GU5.3	-			8	-		
				GU10	.GU	GU10				8			
				GX8.5	.GX	GX8.5				8			
				LED	.40 .60	.ST BPM3181	.9	.27	1370	16	500	.DA .PU .D1	
								.30	1442				
								.40	1522				

30° 10103.01 · 10103.02

45° 10103.03

LUMINAIRE INCLUDES

Surface mounting kit

Reference order

10103.XX.SR.XX.XX.XX.X.XX.XX

*1 Remote driver when dimmable. *Driver remoto cuando es dimable.*

• FINISHES

□

⬟ DIMENSIONS

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE / LAMP

40 | 60

GU5.3 | GU10 | GX8.5

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Wireless Control Options




.SR

SURFACE

• Select finishes



.WH-WH




NOCTUA


REF 10103.SR

PHOTOMETRY



40º 60º

NOCTUA	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1 ▼	SKETCH
	10099	.01	●	GU5.3	.G5	GU5.3	-			8	-		
				GU10	.GU	GU10							
				LED	.40 .60	.ST BPM50	.9	.27	480	7	350	.DA .PU .D1	
								.30	514				
								.40	565				
						.HI BPM500		.27	686	10	500		
								.30	734				
								.40	810				

NOCTUA	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10099	.02	●	GU5.3	.G5	GU5.3	-			8	-		
				GU10	.GU	GU10				8			
				GX8.5	.GX	GX8.5				8			
				LED	.40 .60	.ST BPM3181	.9	.27	1370	16	500	.DA .PU .D1	
								.30	1442				
								.40	1522				

30º 10099.01

45º 10099.02

LUMINAIRE INCLUDES

Surface mounting kit

Reference order | ⬟ 10099.XX ● .SR ■ .XX.XX ▼ .XX.X.XX.XX

*1 Remote driver when dimmable. *Driver remoto cuando es dimable.*

• FINISHES

□

⬟ DIMENSIONS

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE / LAMP

40 | 60

GU5.3 | GU10 | GX8.5

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS


DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Wireless Control Options

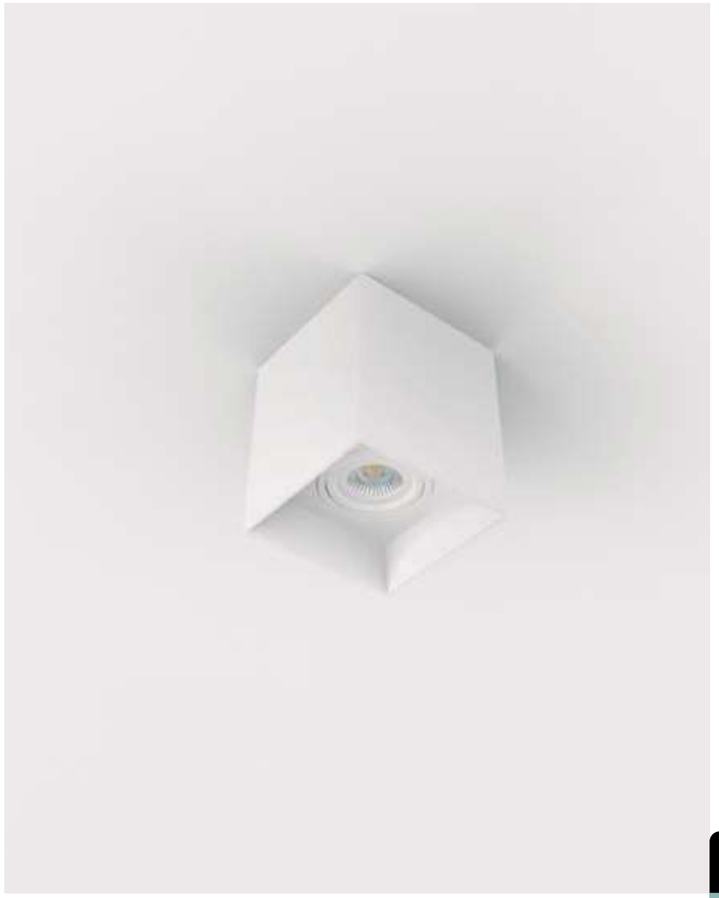

.SR

SURFACE

● Select finishes



.WH-WH



NOCTUA SQ


REF 10099.SR

PHOTOMETRY



40º

60º

NOCTUA DEEP	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1 ▼	SKETCH
	10100	.01	●	GU5.3	.G5	GU5.3	-			8	-		
				GU10	.GU	GU10							
				LED	.40 .60	.ST BPM50	.9	.27	480	7	350	.DA .PU .D1	
								.30	514				
								.40	565				
						.HI BPM300		.27	686	10	500		
								.30	734				
								.40	810				

Con difusor opal.
With opal optic cover.

LUMINAIRE INCLUDES

Surface mounting kit

Reference order ⬟ ● ■ ▼

10100.01.SR.XX.XX.XX.X.XX.XX

*1 Remote driver when dimmable. *Driver remoto cuando es dimable.*



• FINISHES

□

⬟ DIMENSIONS

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE / LAMP

40 | 60

GU5.3 | GU10

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Wireless Control Options



.SR

SURFACE

● Select finishes



.WH-WH




NOCTUA DEEP


REF 10100.SR

PHOTOMETRY



40º 60º

NOCTUA VENUS	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1 ▼	SKETCH
	10102	.01	●	GU5.3	.G5	GU5.3	-			8	-		
				GU10	.GU	GU10							
				LED	.40 .60	.ST BPM50	.9	.27	480	7	350	.DA .PU .D1	
								.30	514				
								.40	565				
						.HI BPM300		.27	686	10	500		
								.30	734				
								.40	810				

NOCTUA VENUS	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10102	.02	●	GU5.3	.G5	G53	-			8	-		
				GU10	.GU	GU10				8			
				GX8.5	.GX	GX8.5				8			
				LED	.40 .60	.ST BPM3181	.9	.27	1370	16	500	.DA .PU .D1	
								.30	1442				
								.40	1522				

30° 10102.01

45° 10102.02

LUMINAIRE INCLUDES

Surface mounting kit

Reference order | ⬟ 10102.01.SR.XX.XX.XX.X.XX.XX ● ■ ▼

*1 Remote driver when dimmable. *Driver remoto cuando es dimable.*

• FINISHES

□

⬟ DIMENSIONS

.01

LIGHTING OPTIONS

■ BEAM ANGLE / LAMP

40	60

GU5.3	GU10	GX8.5

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K	3000K	4000K

▼ DIMMABLE OPTIONS

DALI	1..10	PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Wireless Control Options



.SR

SURFACE

● Select finishes



.WH-WH




NOCTUA VENUS

REF 10102.SR

PHOTOMETRY



40º 60º

NOCTUA OUT	REF.	DIMEN-SIONS ⬟	FINISHES	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10099	.03	CEM	LED	.40	.ST	.8	.30	653	13	550	-	
								.40	786				

LUMINAIRE INCLUDES

Surface mounting kit

Reference order ⬟ ● ■

10099.03.OUT.XX.ST.8.XX

• FINISHES

⬟ DIMENSIONS

.03

LIGHTING OPTIONS

■ BEAM ANGLE / LAMP

40

POWER

STANDARD

CRI

8

COLOR TEMPERATURE

3000K | 4000K

▼ DIMMABLE OPTIONS

-

▲ LIGHT DISTRIBUTION

DOWN

new





.SR

SURFACE

NOCTUA OUT

REF 10119.SR

PHOTOMETRY



40º



60º

RECESSED WITH FRAME

ALABAMA



ALABAMA

10158 PAG. XXX

OHIO



OHIO

10188 PAG. XXX

OHIO SQ

10204 PAG. XXX


ALBERTA



ALBERTA

10176 PAG. XXX

new



ALBERTA SOFT

10217 PAG. XXX

FLORIDA



FLORIDA

10190 PAG. XXX

FLORIDA SQ

10191 PAG. XXX

ALBA



ALBA PLUS

10178 PAG. XXX



ALBA


10160 PAG. XXX



ALBA MINI

10211 PAG. XXX


new



ALBA PLUS ASIMETRIC

210008 PAG. XXX

new



ALBA ASIMETRIC

210009 PAG. XXX

BOLD



BOLD

10190 PAG. XXX



BOLD LINE

10191 PAG. XXX

WING



WING

10200 PAG. XXX

ALARIK

new



ALARIK SLIM

20224 PAG. XXX

MODULIGHT



MODULIGHT

10210 PAG. XXX

MARTORELL



MARTORELL

20115 PAG. XXX



MARTORELL MOVE

20110 PAG. XXX



MARTORELL TARREGA

20117 PAG. XXX



MARTORELL TARREGA SQ

20116 PAG. XXX



MARTORELL TARREGA SQ2

20119 PAG. XXX



MARTORELL CRATE

20176 PAG. XXX



MARTORELL MINI CRATE

20175 PAG. XXX

CATLI



CATLI

3010 PAG. XXX



CATLI SQ

3011 PAG. XXX



CATLI SQ2

3012 PAG. XXX



CATLI SQ3

3013 PAG. XXX



CATLI HALKA

3017 PAG. XXX



CATLI HALKA SQ

3021 PAG. XXX



CATLI ODALKI

3018 PAG. XXX

IP65



CATLI CLASSIC

3005 PAG. XXX

IP65



CATLI CLASSIC SQ

3006 PAG. XXX



CATLI CARE

3000 PAG. XXX



CATLI CARE 2

3001 PAG. XXX

VISUAL INDEX

KLIMT



KLIMT

20134 PAG. XXX

new



KLIMT FIX

20135 PAG. XXX

GEO

new



GEO

30511 PAG. XXX

CAN REVIEW



CAN REVIEW

20149 PAG. XXX

VADI



VADI

3177 PAG. XXX

ALDAIA



ALDAIA

20120 PAG. XXX



ALDAIA SQ

20157 PAG. XXX

KONI



KONI

3161 PAG. XXX

new



KONI SQ

3169 PAG. XXX

new



KONI DEEP

3171 PAG. XXX



KONI TURTA

3156 PAG. XXX

LUK



LUK FREIR

20018 PAG. XXX



LUK FREIR 2

20019 PAG. XXX



LUK

20028 PAG. XXX



LUK 2

20071 PAG. XXX

CUBE



CUBE

8201 PAG. XXX



CUBE SQ2

8202 PAG. XXX



CUBE SQ3

8203 PAG. XXX



CUBE SPOT MOVE

3121 PAG. XXX



CUBE SPOT 2 MOVE

3136 PAG. XXX



CUBE SPOT SQ MOVE

3134 PAG. XXX



CUBE SPOT SQ 2 MOVE

3135 PAG. XXX



CUBE SPOT

3120 PAG. XXX



CUBE SPOT 2

3131 PAG. XXX

SU

IP65



SU

3149 PAG. XXX

IP65



SU SQ

3150 PAG. XXX

IP65



SU OTIS

3234 PAG. XXX

FACE



FACE TUBULAR MOVE

20205 PAG. XXX

RECESSED WITH FRAME

LENT



LENT MODULAR

10216 PAG. XXX



LENT MOTION

10212 PAG. XXX

SASSY



SASSY

410002 PAG. XXX



SASSY SQ

410003 PAG. XXX

OKKO



OKKO

410012 PAG. XXX

OVALI



OVALI

410013 PAG. XXX

BASIT



BASIT

8012 PAG. XXX



BASIT MOVE

8013 PAG. XXX



BASIT MONET

20130 PAG. XXX



BASIT MONET 2

20131 PAG. XXX



BASIT LLORENS

20140 PAG. XXX



BASIT LLORENS SQ

20144 PAG. XXX



BASIT DERIN

8010 PAG. XXX

GALANTA



GALANTA DEEP

410001 PAG. XXX

CASTEJON



CASTEJON

20173 PAG. XXX



CASTEJON SQ

20174 PAG. XXX

ROY



ROY

20154 PAG. XXX

VIO



VIO

20185 PAG. XXX



VIO DEEP

20186 PAG. XXX



VIO DOME

20183 PAG. XXX



VIO SQ

20181 PAG. XXX



VIO MOVE

20184 PAG. XXX



VIO DEEP MOVE

20187 PAG. XXX



VIO DOME MOVE

20182 PAG. XXX



VIO SQ MOVE

20180 PAG. XXX



FINISHES

● COLORS

DIMENSIONS

⬟ DIAMETERS mm. | HEIGHT 129 mm

350 | 450 | 650 | 950 | 1250

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN

LUMINAIRE INCLUDES

Recessed with frame mounting kit



ON DEMAND

Special RAL Color
Special Color Temperature
Number of switches
Emergency Lighting*
CRI 80
Motion Detection
RGB
Wireless Control Options (Casambi)

* Accesories are delivered separately (not installed in luminaire).

.RF

RECESSED FRAME

ALABAMA

REF 10158.RF



INSTALLATIONS



.PN
PENDANT

·10158 ALABAMA | PN
Pag. 175

.SR
SURFACE


·10158 ALABAMA | SR
Pag. 175

.RF
RECESSED FRAME







·10158 ALABAMA | RF
Pag. 175

.TR
TRIMLESS

·10158 ALABAMA | TR
Pag. 175






ALABAMA	REF.	DIMEN-SION ⬟	FINISH	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	**10158**	**.35**	●	**.OP .MP**	**.ST**	**.9**	**.27**	-	18	500	**.DA .PU .D1**	
							.30	2385				
							.40	2475				
						.8	**.TW ***	-	-	-	-	
					.HI	**.9**	**.27**	-	35	500	**.DA .PU .D1**	
							.30	4767				
							.40	4956				
	**10158**	**.45**	●	**.OP .MP**	**.ST**	**.9**	**.27**	4590	35	500	**.DA .PU .D1**	
							.30	4770				
							.40	4950				
						.8	**.TW ***	11400 - 11820	76	700	**.DA**	
					.HI	**.9**	**.27**	9180	71	500	**.DA .PU .D1**	
							.30	9534				
							.40	9912				
	**10158**	**.65**	●	**.OP .MP**	**.ST**	**.9**	**.27**	9180	71	500	**.DA .PU .D1**	
							.30	9540				
							.40	9900				
						.8	**.TW ***	22800-23640	152	700	**.DA**	
					.HI	**.9**	**.27**	18360	142	500	**.DA .PU .D1**	
							.30	19068				
							.40	19824				
	**10158**	**.95**	●	**.OP .MP**	**.ST**	**.9**	**.27**	16830	130	500	**.DA .PU .D1**	
							.30	17490				
							.40	18150				
						.8	**.TW ***	41800-43340	279	700	**.DA**	
					.HI	**.9**	**.27**	33660	260	500	**.DA .PU .D1**	
							.30	34958				
							.40	36344				
	**10158**	**.125**	●	**.OP .MP**	**.ST**	**.9**	**.27**	27540	212	500	**.DA .PU .D1**	
							.30	28620				
							.40	29700				
						.8	**.TW ***	68400-70920	457	700	**.DA**	
					.HI	**.9**	**.27**	55080	425	500	**.DA .PU .D1**	
							.30	57204				
							.40	59472				

Reference order | 10158.XX.RF.XX.XX.XX.X.XX.XX

● Select external finishes








ALABAMA

REF 10158.RF

PHOTOMETRY



OPAL MICROPRISMATIC

INCLUDED



RF INSTALATION KIT

PROFILE



RECESSED FRAME

.RF



FINISHES

● EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ DIAMETERS mm. | HEIGHT 114 mm

350 | 450 | 650 | 950 | 1250

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN

LUMINAIRE INCLUDES

Recessed with frame mounting kit





ON DEMAND


Special RAL Color
Number of switches
Emergency Lighting*
Motion Detection
Wireless Control Options (Casambi)

* Accesories are delivered separately (not installed in luminaire).

.RF

RECESSED FRAME

INSTALLATIONS



FLORIDA

REF 10190.RF



.PN
PENDANT

·10190 FLORIDA | PN
Pag. 175

.SR
SURFACE

·10190 FLORIDA | SR
Pag. 175

.RF
RECESSED FRAME







·10190 FLORIDA | RF
Pag. 175

.TR
TRIMLESS

·10190 FLORIDA | TR
Pag. 175





FLORIDA	REF.	DIMEN-SION ⬟	FINISH	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	**10190**	**.35**	●	**.OP .MP**	**.ST**	**.9**	**.27**	2706	27	700	**.DA .PU .D1**	
							.30	2940				
							.40	3000				
	**10190**	**.45**	●	**.OP .MP**	**.ST**	**.9**	**.27**	4510	45	700	**.DA .PU .D1**	
							.30	4900				
							.40	5000				
	**10190**	**.65**	●	**.OP .MP**	**.ST**	**.9**	**.27**	10824	109	700	**.DA .PU .D1**	
							.30	11760				
							.40	12000				
	**10190**	**.95**	●	**.OP .MP**	**.ST**	**.9**	**.27**	19844	200	700	**.DA .PU .D1**	
							.30	21560				
							.40	22000				
	**10190**	**.125**	●	**.OP .MP**	**.ST**	**.9**	**.27**	31570	318	700	**.DA .PU .D1**	
							.30	34300				
							.40	35000				

Reference order ⬟ ● ■ ▼

10190.XX.RF.XX.XX.ST.9.XX.XX



RECESSED FRAME

.RF

- Select finishes


.BK-BK	.BK-WH	.BK-GC	.BK-BM	.BK-BS	.BK-BC	.BK-CR	.BK-CB	.BK-GY	.BK-MG	.BK-VC	.BK-YM
.WH-BK	.WH-WH	.WH-GC	.WH-BM	.WH-BS	.WH-BC	.WH-CR	.WH-CB	.WH-GY	.WH-MG	.WH-VC	.WH-YM



FLORIDA

REF 10190.RF

PHOTOMETRY




OPAL MICROPRISMATIC

INCLUDED



RF INSTALATION KIT

PROFILE





FINISHES

● EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ DIAMETERS mm. | HEIGHT 114 mm

350 | 450 | 650 | 950 | 1250

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN

LUMINAIRE INCLUDES

Recessed with frame mounting kit





ON DEMAND

Special RAL Color
Number of switches
Emergency Lighting*
Motion Detection
Wireless Control Options (Casambi)

* Accesories are delivered separately (not installed in luminaire).

.RF

RECESSED FRAME

INSTALLATIONS



FLORIDA SQ

REF 10191.RF



.PN
PENDANT

·10191 FLORIDA SQ | PN
Pag. 175

.SR
SURFACE

·10191 FLORIDA SQ | SR
Pag. 175

.RF
RECESSED FRAME








·10191 FLORIDA SQ | RF
Pag. 175

.TR
TRIMLESS


·10191 FLORIDA SQ | TR
Pag. 175





FLORIDA SQ	REF.	DIMEN-SION ⬟	FINISH	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10191	.35	●	.OP .MP	.ST	.9	.27	2706	27	700	.DA .PU .D1	
							.30	2940				
							.40	3000				
	10191	.45	●	.OP .MP	.ST	.9	.27	5412	55	700	.DA .PU .D1	
							.30	5880				
							.40	6000				
	10191	.65	●	.OP .MP	.ST	.9	.27	10824	109	700	.DA .PU .D1	
							.30	11760				
							.40	12000				
	10191	.95	●	.OP .MP	.ST	.9	.27	21648	218	700	.DA .PU .D1	
							.30	23520				
							.40	24000				
	10191	.125	●	.OP .MP	.ST	.9	.27	36080	364	700	.DA .PU .D1	
							.30	39200				
							.40	40000				

Reference order | 10191.XX.RF.XX.XX.ST.9.XX.XX

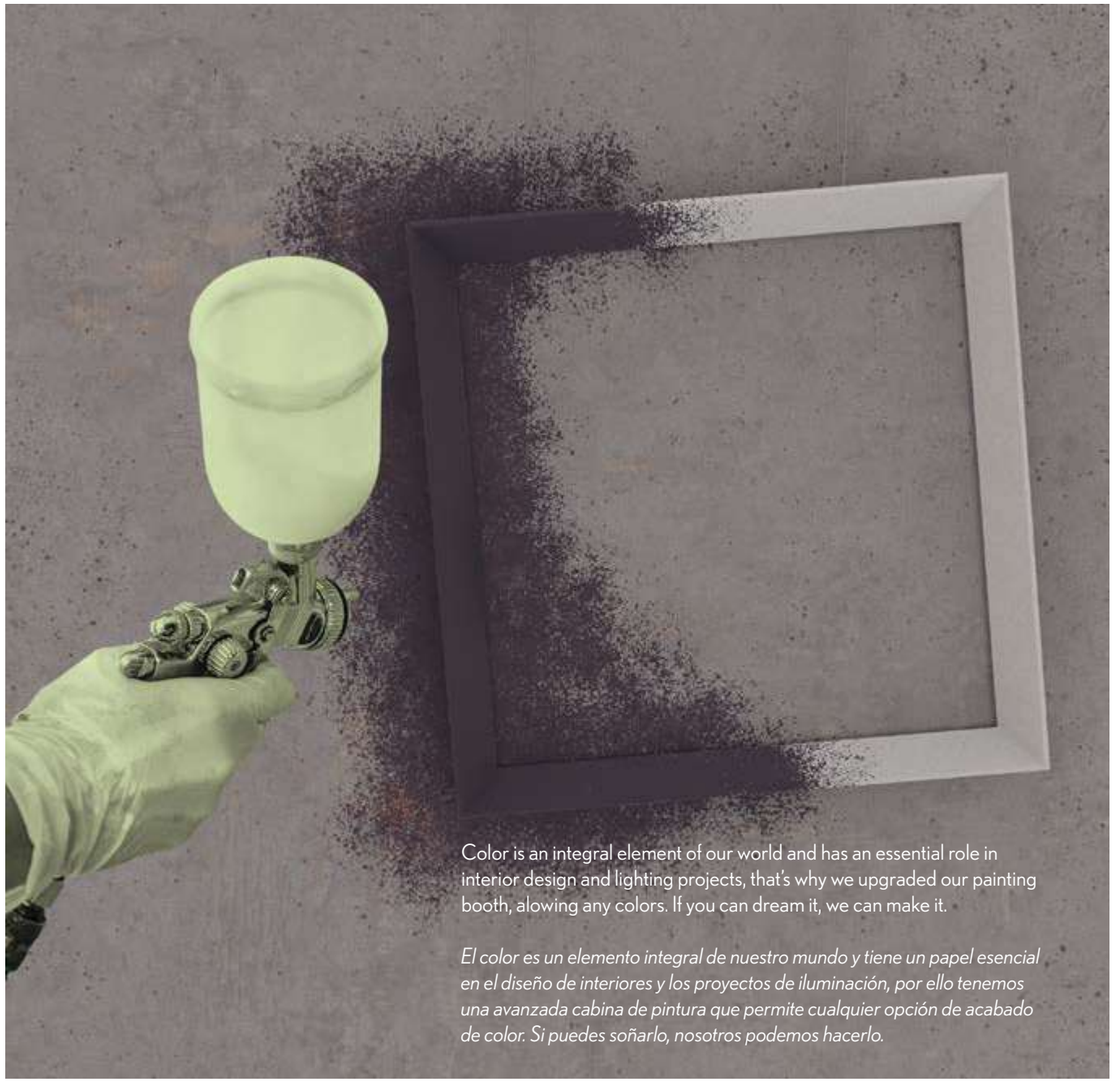

Color is an integral element of our world and has an essential role in interior design and lighting projects, that's why we upgraded our painting booth, alowing any colors. If you can dream it, we can make it.

El color es un elemento integral de nuestro mundo y tiene un papel esencial en el diseño de interiores y los proyectos de iluminación, por ello tenemos una avanzada cabina de pintura que permite cualquier opción de acabado de color. Si puedes soñarlo, nosotros podemos hacerlo.

- Select finishes


.BK-BK	.BK-WH	.BK-GC	.BK-BM	.BK-BS	.BK-BC	.BK-CR	.BK-CB	.BK-GY	.BK-MG	.BK-VC	.BK-YM
.WH-BK	.WH-WH	.WH-GC	.WH-BM	.WH-BS	.WH-BC	.WH-CR	.WH-CB	.WH-GY	.WH-MG	.WH-VC	.WH-YM



FLORIDA SQ

REF 10191.RF

PHOTOMETRY




OPAL MICROPRISMATIC

INCLUDED



RF INSTALATION KIT

PROFILE





FINISHES

● COLORS

DIMENSIONS

⬟ DIAMETERS mm. | HEIGHT 125 mm

650 | 950 | 1250

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN

LUMINAIRE INCLUDES

Recessed with frame mounting kit




ON DEMAND

Special RAL Color
Special Color Temperature
Number of switches
Emergency Lighting*
CRI 80
Motion Detection
RGB
Wireless Control Options (Casambi)
Other Dimensions

* Accesories are delivered separately (not installed in luminaire).

ALBERTA

REF 10176.RF

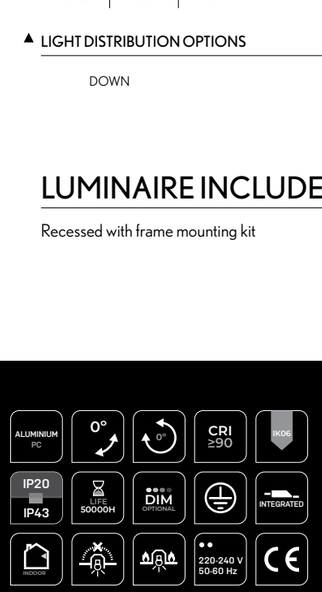

INSTALLATIONS



.PN
PENDANT


·10176 ALBERTA | PN
Pag. 175

.RF
RECESSED FRAME




·10176 ALBERTA | RF
Pag. 175

.TR
TRIMLESS

·10176 ALBERTA | TR
Pag. 175






ALBERTA	REF.	DIMEN-SION ⬟	FINISH	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10176	.65	●	.OP .MP	.ST	.9	.27	3825	30	500	.DA .PU .D1	 653 mm. 230 mm. 125 Ø INT. 343 Ø EXT. 666
							.30	3975				
							.40	4125				
						.8	.TW *1	9500 - 9850	64	700	.DA	
					.HI	.9	.27	7650	59	500	.DA .PU .D1	
							.30	7945				
							.40	8260				
	10176	.95	●	.OP .MP	.ST	.9	.27	6120	47	500	.DA .PU .D1	 953 mm. 230 mm. 125 Ø INT. 543 Ø EXT. 966
							.30	6360				
							.40	6600				
						.8	.TW *1	15200 - 15760	102	700	.DA	
					.HI	.9	.27	12240	94	500	.DA .PU .D1	
							.30	12712				
							.40	13216				
	10176	.125	●	.OP .MP	.ST	.9	.27	7650	59	500	.DA .PU .D1	 1253 mm. 230 mm. 125 Ø INT. 743 Ø EXT. 1266
							.30	7950				
							.40	8250				
						.8	.TW *1	19000-19700	127	700	.DA	
					.HI	.9	.27	15300	118	500	.DA .PU .D1	
							.30	15890				
							.40	16520				

Reference order | 10176.XX.RF.XX.XX.XX.X.XX.XX



● Select finishes






ALBERTA


REF 10176.RF

PHOTOMETRY



OPAL MICROPRISMATIC

INCLUDED



RF INSTALATION KIT

PROFILE



*1 Tunable White (.TW) values correspond to 2700K and 6500K - .TW is only available for DALI dimmable (.DA), CRI 80 (.8) 700mA. *Los valores del blanco dinámico (.TW) corresponden a 2700K y 6500K. -.TW solo está disponible con protocolo DALI (.DA), CRI 80 (.8) 700mA.*



new

FINISHES

● COLORS

DIMENSIONS

⬟ DIAMETERS mm. | HEIGHT 38 mm

350 | 450 | 650 | 950 | 1250 | 1500

2000 | 2500 | 3000 | 4000 | 5000 | 6000

LIGHTING OPTIONS

■ DIFFUSERS

SILICONE

POWERS

STANDARD

CRI

90

COLOR TEMPERATURES

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN

LUMINAIRE INCLUDES



REMOTE

ON DEMAND

Special RAL Color
Number of switches
Emergency Lighting*
Motion Detection
Tunable White
RGB
Wireless Control Options (Casambi)

* Delivered separately
(not installed in luminaire).

.RF


RECESSED FRAME

INSTALLATIONS

ALUMINIUM SILICONE | 0° | 0° | CRI ≥90 | IK06
IP20 IP43 | LIFE 50000H | DIM OPTIONAL | | REMOTE
INDOOR | | | 220-240 V 50-60 Hz | CE

ALBERTA SOFT

REF 10217.RF

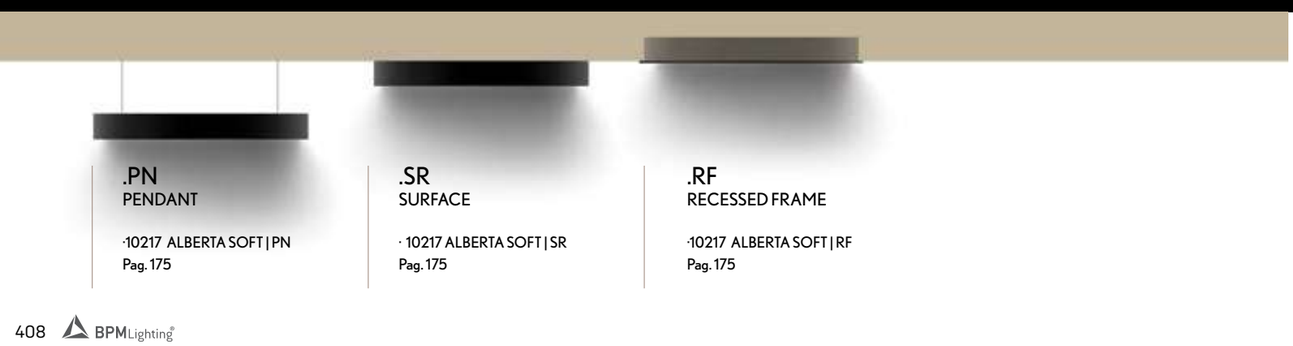

.PN
PENDANT


·10217 ALBERTA SOFT | PN
Pag. 175

.SR
SURFACE






· 10217 ALBERTA SOFT | SR
Pag. 175

.RF
RECESSED FRAME








·10217 ALBERTA SOFT | RF
Pag. 175





ALBERTA SOFT	REF.	DIMEN-SION ⬟	FINISH	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	**10217**	**.35**	●	**.SI**	.ST	.9	.27	5280	56	700	.DA .PU .D1	
							.30	5316				
							.40	5844				
	**10217**	**.45**	●	**.SI**	.ST	.9	.27	7086	70	700	.DA .PU .D1	
							.30	7121				
							.40	7747				
	**10217**	**.65**	●	**.SI**	.ST	.9	.27	8785	86	700	.DA .PU .D1	
							.30	9040				
							.40	9687				
	**10217**	**.95**	●	**.SI**	.ST	.9	.27	13298	129	700	.DA .PU .D1	
							.30	13519				
							.40	14703				
	**10217**	**.125**	●	**.SI**	.ST	.9	.27	17816	172	700	.DA .PU .D1	
							.30	18135				
							.40	18118				
	**10217**	**.150**	●	**.SI**	.ST	.9	.27	-	185	500	.DA .PU .D1	
							.30	25326				
							.40	26901				

Reference order | 10217.XX.RF.XX.XX.ST.9.XX.XX

ALBERTA SOFT	REF.	DIMEN-SION ⬟	FINISH	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	**10217**	**.200**	●	**.SI**	.ST	.9	.27	-	253	500	.DA .PU .D1	
							.30	34185				
							.40	35475				
	**10217**	**.250**	●	**.SI**	.ST	.9	.27	-	318	500	.DA .PU .D1	
							.30	42930				
							.40	44550				
	**10217**	**.300**	●	**.SI**	.ST	.9	.27	-	383	500	.DA .PU .D1	
							.30	51675				
							.40	53625				
	**10217**	**.400**	●	**.SI**	.ST	.9	.27	-	513	500	.DA .PU .D1	
							.30	86655				
							.40	89925				
	**10217**	**.500**	●	**.SI**	.ST	.9	.27	-	643	500	.DA .PU .D1	
							.30	86655				
							.40	89925				
	**10217**	**.600**	●	**.SI**	.ST	.9	.27	-	772	500	.DA .PU .D1	
							.30	104145				
							.40	108075				

Reference order | 10217.XX.RF.XX.XX.ST.9.XX.XX

RECESSED FRAME

.RF

● Select finishes





ALBERTA SOFT


REF 10217.RF

PHOTOMETRY




SILICONE

INCLUDED



RF INSTALATION KIT

PROFILE





FINISHES

● COLORS

DIMENSIONS

⬟ DIAMETERS mm. | HEIGHT 125 mm

250 | 350 | 450 | 650 | 950 | 1250

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD

CRI

STANDARD

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN

LUMINAIRE INCLUDES

Recessed with frame mounting kit



ON DEMAND

Special Color Temperature
Number of switches
Emergency Lighting*
Motion Detection
Wireless Control Options (Casambi)

* Accesories are delivered separately (not installed in luminaire).

.RF

RECESSED FRAME

INSTALLATIONS



OHIO

REF 10188.RF



.PN
PENDANT

·10188 OHIO SLIM | PN
Pag. 175

.SR
SURFACE


·10188 OHIO SLIM | SR
Pag. 175

.RF
RECESSED FRAME







·10188 OHIO | RF
Pag. 175

.TR
TRIMLESS

·10188 OHIO | TR
Pag. 175






OHIO	REF.	DIMEN-SION ⬟	FINISH	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	**10188**	**.25**	●	**.OP .MP**	**.ST**	**.9**	**.27**	-	12	700	**.DA .PU .D1**	
							.30	1590				
							.40	1650				
	**10188**	**.35**	●	**.OP .MP**	**.ST**	**.9**	**.27**	-	18	700	**.DA .PU .D1**	
							.30	2385				
							.40	2475				
	**10188**	**.45**	●	**.OP .MP**	**.ST**	**.9**	**.27**	4590	35	700	**.DA .PU .D1**	
							.30	4770				
							.40	4950				
	**10188**	**.65**	●	**.OP .MP**	**.ST**	**.9**	**.27**	9180	71	700	**.DA .PU .D1**	
							.30	9540				
							.40	9900				
	**10188**	**.95**	●	**.OP .MP**	**.ST**	**.9**	**.27**	16830	130	700	**.DA .PU .D1**	
							.30	17490				
							.40	18150				
	**10188**	**.125**	●	**.OP .MP**	**.ST**	**.9**	**.27**	27540	212	700	**.DA .PU .D1**	
							.30	28620				
							.40	29700				

Reference order | 10188.XX.RF.XX.XX.ST.9.XX.XX

● Select finishes



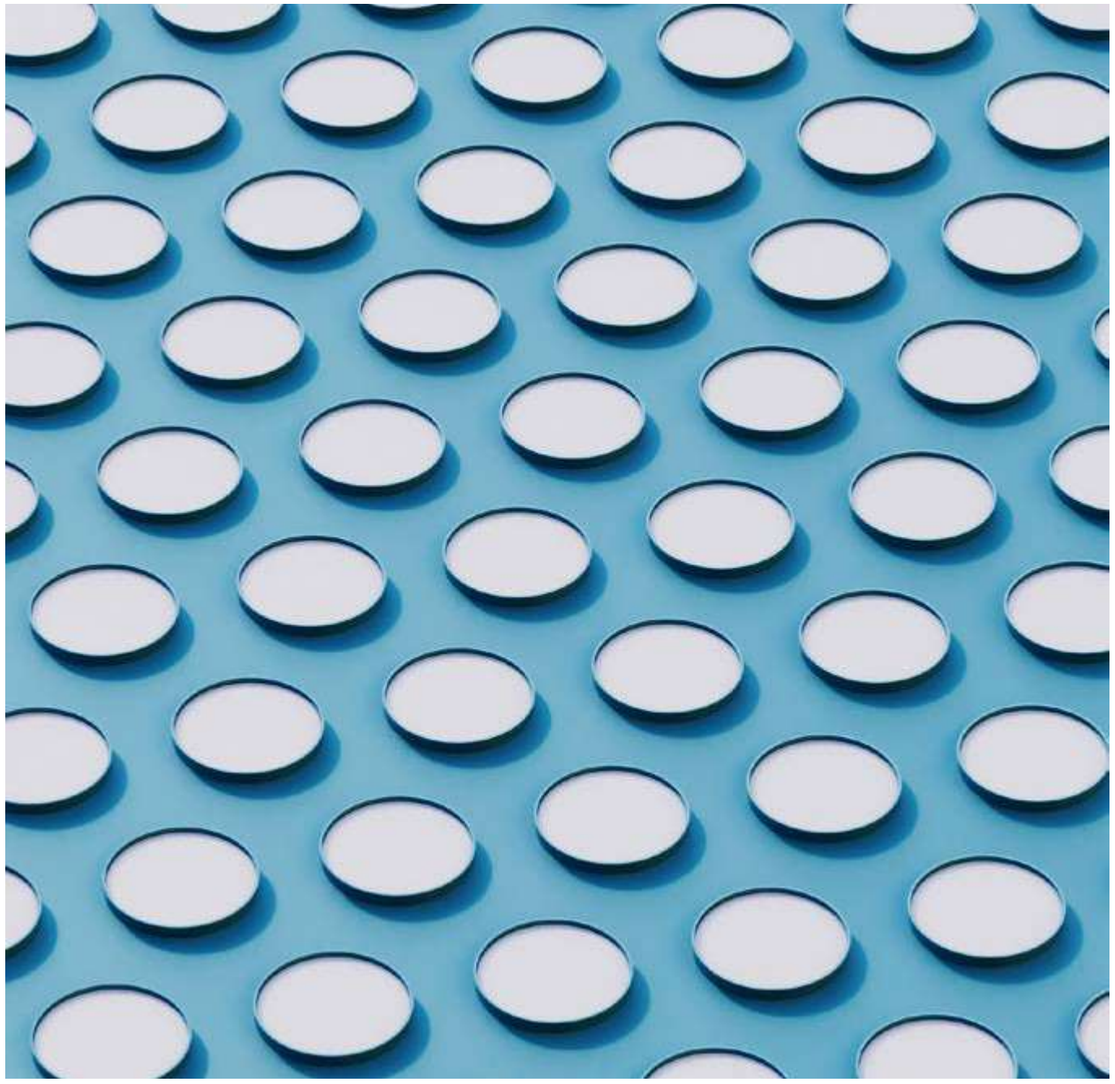


ALUMINIUM PC | 0° | 0° | CRI ≥90 | IK06 | IP20 IP43 | L70 50000H | DIM OPTIONAL | INTEGRATED | INDOOR | 220-240 V 50-60 Hz | CE

OHIO


REF 10188.RF

PHOTOMETRY




OPAL MICROPRISMATIC

INCLUDED



RF INSTALATION KIT

PROFILE





FINISHES

● COLORS

DIMENSIONS

⬟ DIAMETERS mm. | HEIGHT 125 mm

350 | 450 | 650 | 950 | 1250

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN

LUMINAIRE INCLUDES

Recessed with frame mounting kit



ON DEMAND

Special Color Temperature
Number of switches
Emergency Lighting*
Motion Detection
Wireless Control Options (Casambi)

* Accesories are delivered separately (not installed in luminaire).

.RF

RECESSED FRAME

INSTALLATIONS



OHIO SQ

REF 10204.RF



.RF
RECESSED FRAME






·10204 OHIO SQ | RF
Pag. 175

.TR
TRIMLESS

·10204 OHIO SQ | TR
Pag. 175





OHIO SQ	REF.	DIMEN-SION ⬟	FINISH	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	**10204**	**.35**	●	**.OP .MP**	**.ST**	**.9**	**.27**	2703	27	700	**.DA .PU .D1**	
							.30	2940				
							.40	3000				
	**10204**	**.45**	●	**.OP .MP**	**.ST**	**.9**	**.27**	5412	55	700	**.DA .PU .D1**	
							.30	5880				
							.40	6000				
	**10204**	**.65**	●	**.OP .MP**	**.ST**	**.9**	**.27**	10824	109	700	**.DA .PU .D1**	
							.30	11760				
							.40	12000				
	**10204**	**.95**	●	**.OP .MP**	**.ST**	**.9**	**.27**	21648	218	700	**.DA .PU .D1**	
							.30	23520				
							.40	24000				
	**10204**	**.125**	●	**.OP .MP**	**.ST**	**.9**	**.27**	36080	364	700	**.DA .PU .D1**	
							.30	39200				
							.40	40000				


Reference order | 10204.XX.RF.XX.XX.ST.9.XX.XX



RECESSED FRAME

.RF

- Select finishes






OHIO SQ


REF 10204.RF

PHOTOMETRY




OPAL MICROPRISMATIC

INCLUDED



RF INSTALATION KIT

PROFILE



8

A blank canvas.

There are no limits Don't worry about lighting. Imagine the end result and use our Line profiles to make it happen. Few collections can be combined in so many ways to create so many looks and fulfil so many functions. It's the joker in the pack for designing unique spaces..

When it comes to technology, there's no shortage of features: With options for indirect light, dimmer, tunable white, RedUGeR®, customisable technology... and more.

Un lienzo en blanco.

Vía libre. No pensar en las luminarias. Pensar en el resultado final, y nuestra perfilería lineal se adaptará a ello. Pocas colecciones se prestan a tantas combinaciones, tanto estéticas como de funcionamiento, por ello es un comodín a la hora de diseñar espacios que requieren de un plus de singularidad.

A nivel técnico, un auténtico compendio de ventajas: Capacidad de incorporar luz indirecta, regulaciones, blanco dinámico, RedUGeR® ,personalizable en aspectos técnicos... entre otros muchos beneficios.



LINES

RECESSED WITH FRAME



FINISHES

● COLORS

DIMENSIONS

⬟ LENGTHS mm.

863 | 1144 | 1425 | 1706 | 1987 | 2268

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS


DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

Recessed with frame mounting kit

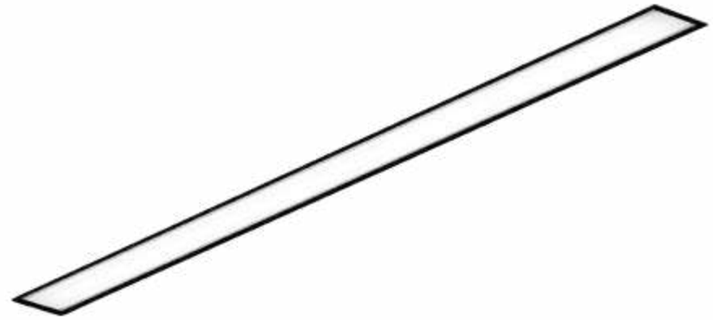



ON DEMAND

Emergency Lighting*
Motion Detection
Well-Certified LED Boards
Taylor your own design
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

INSTALLATIONS



ALBA
PLUS

REF 10178.RF



.PN
PENDANT

·10178 ALBA PLUS | PN
Pag. 175

.TK
TRACK

·10178 ALBA PLUS | TK
Pag. 175

.SR
SURFACE


·10178 ALBA PLUS | SR
Pag. 175


.RF
RECESSED FRAME

·10178 ALBA PLUS | RF
Pag. 175

.TR
TRIMLESS

·10178 ALBA PLUS | TR
Pag. 175



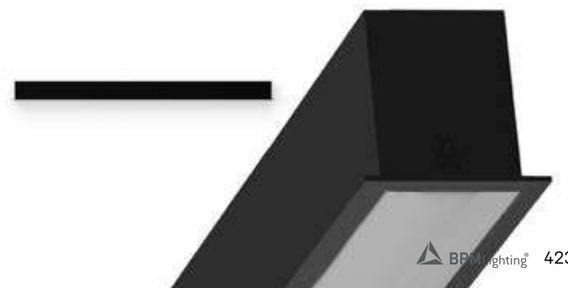

REF.	DIMENSION ⬟	MM	FINISH ●	DIFUSSER ■	POWER	CRI	DOWNLIGHT | LUMEN .27	.30	.40	.TW*2	WATT K	TW	DIMM ▼
10178	.03	863	●	.OP .MP	.ST	.9	2295	2385	2475	5700-8520	18	38	.DA .PU .D1
	.04	1144					3060	3180	3300	7600-11360	24	51	
	.05	1425					3825	3975	4125	9500-14200	30	64	
	.06	1706					4590	4770	4950	11400-17040	35	76	
	.07	1987					5355	5565	5775	13300-19880	41	89	
	.08	2268					6120	6360	6600	15200-22720	47	102	

REF.	DIMENSION ⬟	MM	FINISH ●	DIFUSSER ■	POWER	CRI	DOWNLIGHT | LUMEN .27	.30	.40	WATT	DIMM ▼
10178	.03	863	●	.OP .MP	.HI	.9	4590	4767	4956	35	.DA .PU .D1
	.04	1144					6120	6356	6608	47	
	.05	1425					7650	7945	8260	59	
	.06	1706					9180	9534	9912	71	
	.07	1987					10710	11123	11564	83	
	.08	2268					12240	12712	13216	94	

Reference order | 10178.XX.RF.XX.XX.XX.9.XX.XX

COMPONENTS

COVERT KIT	REF.	FINISH
	TF01	●

Reference order | TF01.RF.XX

REDUGER	REF.	POWER
	ACC.RG	.ST .HI

Reference order | ACC.RG.XX

JOINTS

LINEAR JOINT	ANGLE JOINT	T-JOINT	CROSS JOINT	ROOF-WALL JOINT	FINISH
					●
UR01 40 x75mm	UL01 130x130mm	UT01 223x151mm	UC01 210x210mm	UV01 130x130mm	

Reference order | XX01.RF.XX

.RF

RECESSED FRAME

● Select finish





ALBA PLUS


REF 10178.RF

PHOTOMETRY




OPAL MICROPRISMATIC

INCLUDED



RF INSTALATION KIT

PROFILE



*1 Tunable White (.TW) values correspond to 2700K and 6500K - .TW is only available for DALI dimmable (.DA), CRI 80 (.8) 700mA. *Los valores del blanco dinámico (.TW) corresponden a 2700K y 6500K. -.TW solo está disponible con protocolo DALI (.DA), CRI 80 (.8) 700mA.*

*2 Down light (direct light) works at 500mA. *La luz directa trabaja a 500mA.*



FINISHES

● COLORS

DIMENSIONS

⬟ LENGTHS mm.

863 | 1144 | 1425 | 1706 | 1987 | 2268

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS


DALI | 1.10 | PUSH


▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

Recessed with frame mounting kit

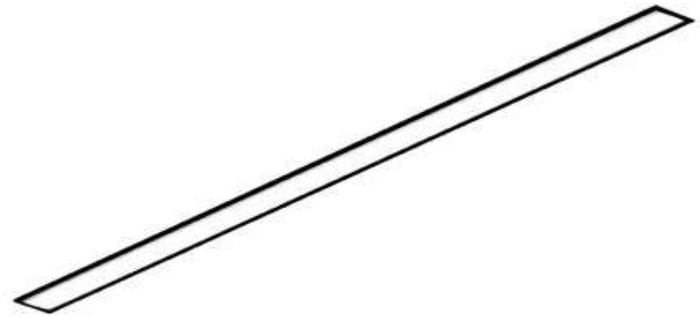



ON DEMAND

Emergency Lighting*
Motion Detection
Well-Certified LED Boards
Taylor your own design
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

RECESSED FRAME

INSTALLATIONS



ALBA

REF 10160.RF



.PN
PENDANT

·10160 ALBA | PN
Pag. 175

.WS
WALL SURFACE

·10160 ALBA | WS
Pag. 175

.TK
TRACK

·10160 ALBA | TK
Pag. 175

.SR
SURFACE


·10160 ALBA | SR
Pag. 175

.RF
RECESSED FRAME

·10160 ALBA | RF
Pag. 175

.TR
TRIMLESS

·10160 ALBA | TR
Pag. 175





REF.	DIMENSION ⬟	MM	FINISH	DIFUSSER ■	POWER	CRI	DOWNLIGHT | LUMEN .27	.30	.40	.TW*2	WATT K	TW	DIMM ▼
10160	.03	863	●	.OP .MP	.ST	.9	2295	2385	2475	5700-8520	18	38	.DA .PU .D1
	.04	1144					3060	3180	3300	7600-11360	24	51	
	.05	1425					3825	3975	4125	9500-14200	30	64	
	.06	1706					4590	4770	4950	11400-17040	35	76	
	.07	1987					5355	5565	5775	13300-19880	41	89	
	.08	2268					6120	6360	6600	15200-22720	47	102	

REF.	DIMENSION ⬟	MM	FINISH	DIFUSSER ■	POWER	CRI	DOWNLIGHT | LUMEN .27	.30	.40	WATT	DIMM ▼
10160	.03	863	●	.OP .MP	.HI	.9	4590	4767	4956	35	.DA .PU .D1
	.04	1144					6120	6356	6608	47	
	.05	1425					7650	7945	8260	59	
	.06	1706					9180	9534	9912	71	
	.07	1987					10710	11123	11564	83	
	.08	2268					12240	12712	13216	94	

Reference order | 10160.XX.RF.XX.XX.XX.9.XX.XX

COMPONENTS

COVERT KIT	REF.	FINISH
	TF02	●

Reference order | TF02.RF.XX

REDUGER	REF.	POWER
	ACC.RG	.ST .HI

Reference order | ACC.RG.XX

JOINTS

LINEAR JOINT	ANGLE JOINT	T-JOINT	CROSS JOINT	ROOF-WALL JOINT	FINISH
					●
UR02 XX x XXX	**UA02** 130x130mm	**UT02** 223x95mm	**UX02** 210x210mm	**UV02** XX x XXX	

Reference order | XX02.RF.XX

.RF

RECESSED FRAME

● Select finish





ALBA


REF 10160.RF

PHOTOMETRY




OPAL MICROPRISMATIC

INCLUDED




RF INSTALATION KIT

PROFILE



*1 Tunable White (.TW) values correspond to 2700K and 6500K - .TW is only available for DALI dimmable (.DA), CRI 80 (.8) 700mA. *Los valores del blanco dinámico (.TW) corresponden a 2700K y 6500K. -.TW solo está disponible con protocolo DALI (.DA), CRI 80 (.8) 700mA.*

*2 Down light (direct light) works at 500mA. *La luz directa trabaja a 500mA.*

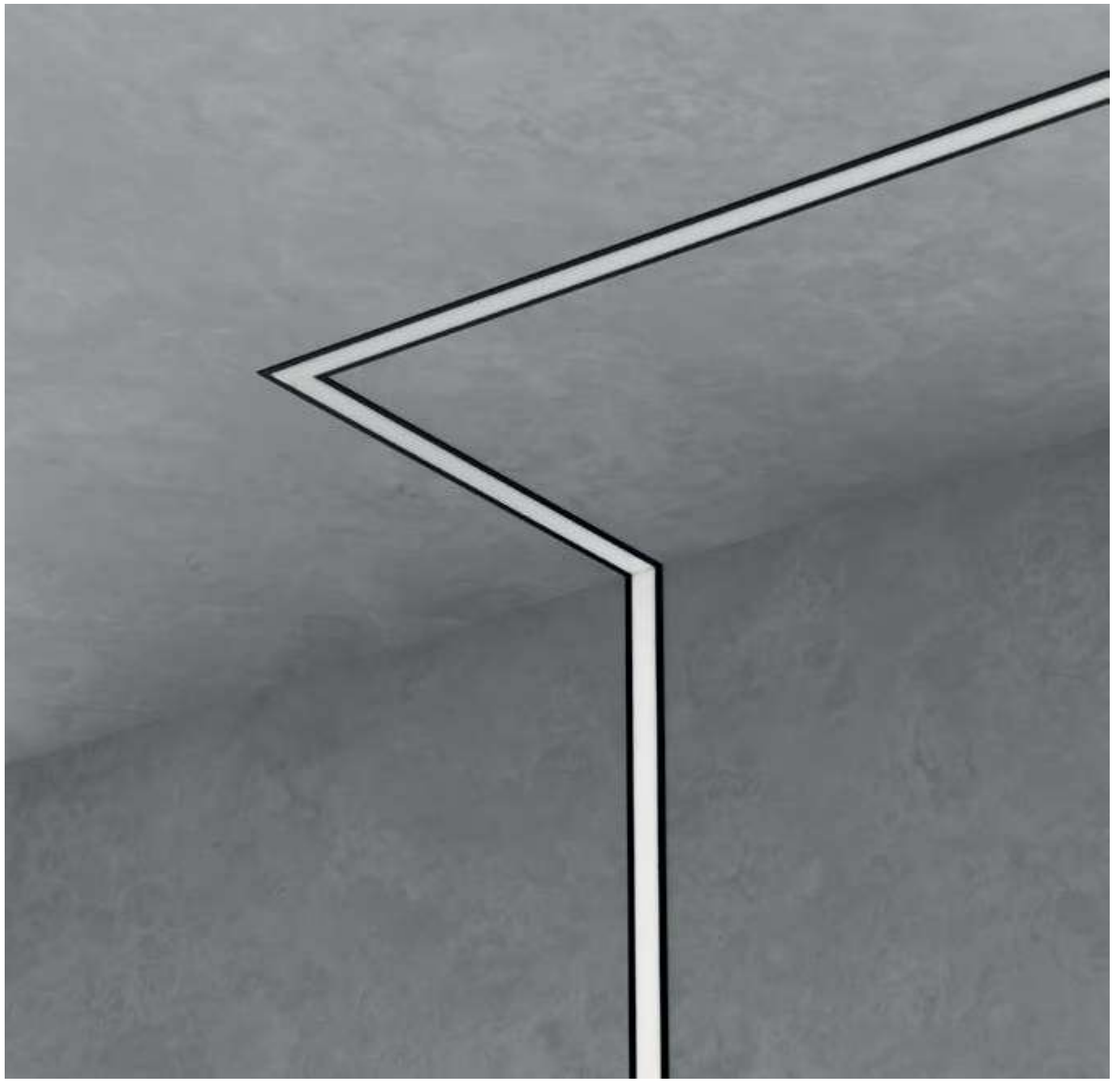

FINISHES

● COLORS

DIMENSIONS

⬟ LENGTHS mm.

868 | 1153 | 1434 | 1715 | 1996 | 2277

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS


DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

Recessed with frame mounting kit

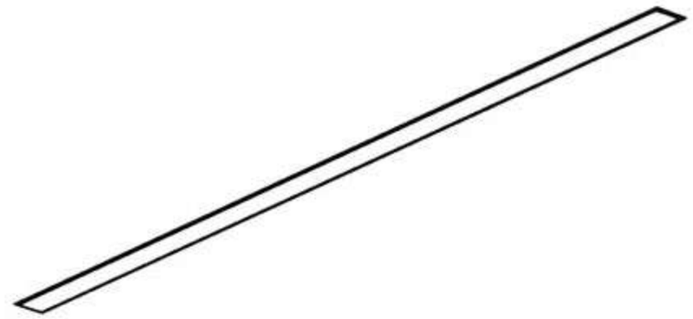



REMOTE

ON DEMAND

Emergency Lighting*
Motion Detection
Well-Certified LED Boards
Taylor your own design
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

RECESSED FRAME

INSTALLATIONS



ALBA MINI

REF 10211.RF



.PN
PENDANT

·10211 ALBA MINI | PN
Pag. 175

.SR
SURFACE


·10211 ALBA MINI | SR
Pag. 175

.RF
RECESSED FRAME

·10211 ALBA MINI | RF
Pag. 175

.TR
TRIMLESS

·10211 ALBA MINI | TR
Pag. 175





REF.	DIMENSION ⬟	MM	FINISH	DIFUSSER ■	POWER	CRI	DOWNLIGHT | LUMEN .27	.30	.40	.TW*2	WATT K	TW	DIMM ▼
10211	.03	868	●	.OP .MP	.ST	.9	2295	2385	2475	5700-5910	18	38	.DA .PU .D1
	.04	1149					3060	3180	3300	7600-7880	24	51	
	.05	1430					3825	3975	4125	9500-9850	30	64	
	.06	1711					4590	4770	4950	11400-11820	35	76	
	.07	1992					5355	5565	5775	13300-13790	41	89	
	.08	2273					6120	6360	6600	15200-15760	47	102	

REF.	DIMENSION ⬟	MM	FINISH	DIFUSSER ■	POWER	CRI	DOWNLIGHT | LUMEN .27	.30	.40	WATT	DIMM ▼
10211	.03	868	●	.OP .MP	.HI	.9	4590	4767	4956	35	.DA .PU .D1
	.04	1149					6120	6356	6608	47	
	.05	1430					7650	7945	8260	59	
	.06	1711					9180	9534	9912	71	
	.07	1992					10710	11123	11564	83	
	.08	2273					12240	12712	13216	94	

Reference order | 10211.XX.RF.XX.XX.XX.9.XX.XX

COMPONENTS

COVERT KIT	REF.	FINISH
	TF03	●

Reference order | TF03.RF.XX ●

JOINTS

LINEAR JOINT	ANGLE JOINT	T-JOINT	CROSS JOINT	ROOF-WALL JOINT	FINISH
					●
UR03 XX x XXX	**UL03** 130x130mm	**UT03** 223x121,5mm	**UC03** 210x210mm	**UV03** 130x130mm	

Reference order | XX03.RF.XX ●

.RF

RECESSED FRAME

● Select finish





ALBA MINI


REF 10211.RF

PHOTOMETRY




OPAL MICROPRISMATIC

INCLUDED



RF INSTALATION KIT

PROFILE



*1 Tunable White (.TW) values correspond to 2700K and 6500K - .TW is only available for DALI dimmable (.DA), CRI 80 (.8) 700mA. *Los valores del blanco dinámico (.TW) corresponden a 2700K y 6500K.*
-.TW solo está disponible con protocolo DALI (.DA), CRI 80 (.8) 700mA.
*2 Down light (direct light) works at 500mA. *La luz directa trabaja a 500mA.*



new

FINISHES

● COLORS

DIMENSIONS

⬟ LENGTHS mm.

863 | 1144 | 1425 | 1706 | 1987 | 2268

LIGHTING OPTIONS

■ DIFFUSERS

-

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH


▲ LIGHT DISTRIBUTION

ASYMETRIC DOWN

LUMINAIRE INCLUDES

Recessed with frame mounting kit





ON DEMAND

Emergency Lighting*
Well-Certified LED Boards
Taylor your own design
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80
Motion Detection

INSTALLATIONS



ALBA
PLUS ASIMETRIC

REF 210008.RF



.PN
PENDANT

·210008 ALBA PLUS ASIMETRIC | PN - Pag. 175

.SR
SURFACE


·210008 ALBA PLUS ASIMETRIC | SR - Pag. 175

.RF
RECESSED FRAME

·210008 ALBA PLUS ASIMETRIC | RF - Pag. 175

.TR
TRIMLESS

·210008 ALBA PLUS ASIMETRIC | TR - Pag. 175





REF.	DIMENSION ⬟	MM	FINISH ●	DIFUSSER ■	POWER	CRI	DOWNLIGHT | LUMEN .27	.30	.40	.TW*2	WATT K	TW	DIMM ▼
210008	.03	863	●	.OP .MP	.ST	.9	2295	2385	2475	5700-5910	18	38	.DA .PU .D1
	.04	1144					3060	3180	3300	7600-7880	24	51	
	.05	1425					3825	3975	4125	9500-9850	30	64	
	.06	1706					4590	4770	4950	11400-11820	35	76	
	.07	1987					5355	5565	5775	13300-13790	41	89	
	.08	2268					6120	6360	6600	15200-15760	47	102	

REF.	DIMENSION ⬟	MM	FINISH ●	DIFUSSER ■	POWER	CRI	DOWNLIGHT | LUMEN .27	.30	.40	WATT	DIMM ▼
210008	.03	863	●	.OP .MP	.HI	.9	4590	4767	4956	35	.DA .PU .D1
	.04	1144					6120	6356	6608	47	
	.05	1425					7650	7945	8260	59	
	.06	1706					9180	9534	9912	71	
	.07	1987					10710	11123	11564	83	
	.08	2268					12240	12712	13216	94	

Reference order | 210008.XX.RF.XX.XX.XX.X.XX.XX

COMPONENTS

COVERT KIT	REF.	FINISH
	TF05	●

Reference order | TF05.RF.XX

JOINTS

LINEAR JOINT

UR05 XX x XXX



RECESSED FRAME

.RF

● Select finish





ALBA
PLUS ASIMETRIC


REF 210008.RF

PHOTOMETRY




TRANSPARENT PC

INCLUDED



RF INSTALATION KIT

PROFILE



*1 Tunable White (.TW) values correspond to 2700K and 6500K - .TW is only available for DALI dimmable (.DA), CRI 80 (.8) 700mA. *Los valores del blanco dinámico (.TW) corresponden a 2700K y 6500K.*
-.TW solo está disponible con protocolo DALI (.DA), CRI 80 (.8) 700mA.
*2 Down light (direct light) works at 500mA. *La luz directa trabaja a 500mA.*



FINISHES

● COLORS

DIMENSIONS

⬟ LENGTHS mm.

863 | 1144 | 1425 | 1706 | 1987 | 2268

LIGHTING OPTIONS

■ DIFFUSERS

-

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

ASYMETRIC DOWN

LUMINAIRE INCLUDES

Recessed with frame mounting kit

new





ON DEMAND

Emergency Lighting*
Well-Certified LED Boards
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

.RF

RECESSED FRAME

INSTALLATIONS



ALBA
ASIMETRIC

REF 210009.RF



.PN
PENDANT

·210009 ALBA ASIMETRIC
| PN - Pag. 175

.WS
WALL SURFACE

·210009 ALABA ASIMETRIC
| WS - Pag. 175

.SR
SURFACE


·210009 ALBA ASIMETRIC
| SR - Pag. 175

.RF
RECESSED FRAME

·210009 ALBA ASIMETRIC
| RF - Pag. 175

.TR
TRIMLESS

·210009 ALBA ASIMETRIC
| TR - Pag. 175





REF.	DIMENSION ⬟	MM	FINISH	DIFUSSER ■	POWER	CRI	DOWNLIGHT | LUMEN .27	.30	.40	.TW*2	WATT K	TW	DIMM ▼
210009	.03	863	●	.OP .MP	.ST	.9	2295	2385	2475	5700-5910	18	38	.DA .PU .D1
	.04	1144					3060	3180	3300	7600-7880	24	51	
	.05	1425					3825	3975	4125	9500-9850	30	64	
	.06	1706					4590	4770	4950	11400-11820	35	76	
	.07	1987					5355	5565	5775	13300-13790	41	89	
	.08	2268					6120	6360	6600	15200-15760	47	102	

REF.	DIMENSION ⬟	MM	FINISH	DIFUSSER ■	POWER	CRI	DOWNLIGHT | LUMEN .27	.30	.40	WATT	DIMM ▼
210009	.03	863	●	.OP .MP	.HI	.9	4590	4767	4956	35	.DA .PU .D1
	.04	1144					6120	6356	6608	47	
	.05	1425					7650	7945	8260	59	
	.06	1706					9180	9534	9912	71	
	.07	1987					10710	11123	11564	83	
	.08	2268					12240	12712	13216	94	

Reference order | 210009.XX.RF.XX.XX.XX.X.XX.XX

COMPONENTS

COVERT KIT	REF.	FINISH
	TF06	●

Reference order | TF06.RF.XX

JOINTS

LINEAR JOINT

UR06 XX x XXX



RECESSED FRAME

.RF

● Select finish





ALBA
ASIMETRIC


REF 210009.RF

PHOTOMETRY




TRANSPARENT PC

INCLUDED



RF INSTALATION KIT

PROFILE



*1 Tunable White (.TW) values correspond to 2700K and 6500K - .TW is only available for DALI dimmable (.DA), CRI 80 (.8) 700mA. *Los valores del blanco dinámico (.TW) corresponden a 2700K y 6500K. -.TW solo está disponible con protocolo DALI (.DA), CRI 80 (.8) 700mA.*

*2 Down light (direct light) works at 500mA. *La luz directa trabaja a 500mA.*



FINISHES

● EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ LENGTHS mm.

863 | 1144 | 1425 | 1706 | 1987 | 2268

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

Recessed with frame mounting kit





ON DEMAND

Emergency Lighting *
Motion Detection
Well-Certified LED Boards
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

.RF

RECESSED FRAME

INSTALLATIONS



WING

REF 10200.RF



.PN
PENDANT

·10200 WING | PN
Pag. 175

.SR
SURFACE


·10200 WING | SR
Pag. 175

.RF
RECESSED FRAME

·10200 WING | RF
Pag. 175

.TR
TRIMLESS

·10200 WING | TR
Pag. 175





REF.	DIMENSION ⬟	MM	FINISH ●	DIFUSSER ■	POWER	CRI	DOWNLIGHT | LUMEN .27	.30	.40	.TW*2	WATT K	TW	DIMM ▼
10200	.03	863	●	.OP .MP	.ST	.9	2295	2385	2475	5700-5910	18	38	.DA .PU .D1
	.04	1144					3060	3180	3300	7600-7880	24	51	
	.05	1425					3825	3975	4125	9500-9850	30	64	
	.06	1706					4590	4770	4950	11400-11820	35	76	
	.07	1987					5355	5565	5775	13300-13790	41	89	
	.08	2268					6120	6360	6600	15200-15760	47	102	

REF.	DIMENSION ⬟	MM	FINISH ●	DIFUSSER ■	POWER	CRI	DOWNLIGHT | LUMEN .27	.30	.40	WATT	DIMM ▼
210009	.03	863	●	.OP .MP	.HI	.9	4590	4767	4956	35	.DA .PU .D1
	.04	1144					6120	6356	6608	47	
	.05	1425					7650	7945	8260	59	
	.06	1706					9180	9534	9912	71	
	.07	1987					10710	11123	11564	83	
	.08	2268					12240	12712	13216	94	

Reference order | 10200.XX.RF.XX.XX.XX.X.XX.XX

COMPONENTS

COVERT KIT	REF.	FINISH
	TF13	●

Reference order | TF13.RF.XX

REDUGER	REF.	POWER
	ACC.RG	.ST .HI


Reference order | ACC.RG.XX

JOINTS

LINEAR JOINT

UR13 40 x52mm

● Select finish

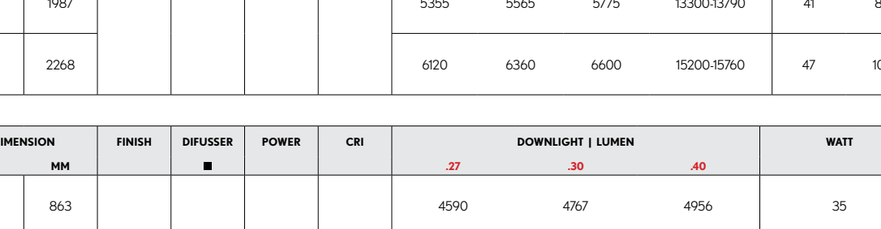



WING


REF 10200.RF

PHOTOMETRY




OPAL MICROPRISMATIC

INCLUDED



RF INSTALATION KIT

PROFILE



*1 Tunable White (.TW) values correspond to 2700K and 6500K - .TW is only available for DALI dimmable (.DA), CRI 80 (.8) 700mA. *Los valores del blanco dinámico (.TW) corresponden a 2700K y 6500K.*
-.TW solo está disponible con protocolo DALI (.DA), CRI 80 (.8) 700mA.
*2 Down light (direct light) works at 500mA. *La luz directa trabaja a 500mA.*



new

FINISHES

● COLORS

DIMENSIONS

⬟ LENGTHS mm.

863	1144	1425	1706
800	1520	2950	5100

LIGHTING OPTIONS

■ DIFFUSERS

OPAL

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS


DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

Recessed with frame mounting kit

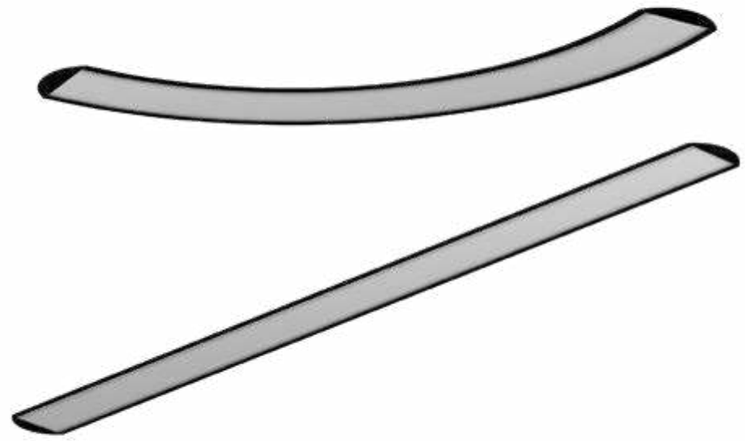

ON DEMAND

Emergency Lighting *
Motion Detection
Well-Certified LED Boards
Taylor your own design
Special Color Temperature
RGB
Wireless Control Options (Casambi)

RECESSED FRAME

BOLD | BOLD LINE

REF 210001.RF | 210015.RF

INSTALLATIONS



.PN
PENDANT

·210001 BOLD ·210015 BOLD LINE | PN
Pag. 175

.SR
SURFACE

·210001 BOLD ·210015 BOLD LINE | SR
Pag. 175

.RF
RECESSED FRAME

·210001 BOLD ·210015 BOLD LINE |RF
Pag. 175



BOLD						
.01 800 mm | 45º	**.02** 800 mm | 90º	**.03** 1520 mm | 45º	**.04** 1520 mm | 90º	**.05** 2950 mm | 45º	**.06** 2950 mm | 90º	**.07** 5100 mm | 45º
						

REF.	DIMENSION ⬟	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT *1 | LUMEN .27	.30	.40	WATT	DIMM ▼
210001	**.01**	●	**.OP**	**.ST**	**.9**	765	795	825	6	**.DA .PU .D1**
	.02					1530	1590	1650	12	
	.03					1530	1590	1650	12	
	.04					3060	3180	3300	24	
	.05					3060	3180	3300	24	
	.06					6120	6360	6600	47	
	0.7					5355	5565	5775	41	

REF.	DIMENSION ⬟	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT *1 | LUMEN .27	.30	.40	WATT	DIMM ▼
210001	**.01**	●	**.OP**	**.HI**	**.9**	1530	1589	1652	12	**.DA .PU .D1**
	.02					3060	3178	3304	24	
	.03					3060	3178	3304	24	
	.04					6120	6356	6608	47	
	.05					6120	6356	6608	47	
	.06					12240	12712	13216	94	
	0.7					10710	11123	11564	83	

Reference order | 210001.XX.RF.XX.XX.XX.9.XX.XX

BOLD LINE	REF.	DIMENSION ⬟	MM	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT *1 | LUMEN .27	.30	.40	WATT K	DIMM ▼
	**210015**	**.03**	863	●	**.OP .MP**	**.ST**	**.9**	2295	2385	2475	18	**.DA .PU .D1**
		.04	1144					3060	3180	3300	24	
		.05	1425					3825	3975	4125	30	
		.06	1706					4590	4770	4950	35	

BOLD LINE	REF.	DIMENSION ⬟	MM	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT *1 | LUMEN .27	.30	.40	WATT K	DIMM ▼
	**210015**	**.03**	863	●	**.OP .MP**	**.ST**	**.9**	4590	4767	4956	35	**.DA .PU .D1**
		.04	1144					6120	6356	6608	47	
		.05	1425					7650	7945	8260	59	
		.06	1706					9180	9534	9912	71	

Reference order | 210015.XX.SR.XX.XX.XX.9.XX.XX

COMPONENTS

COVERT KIT	REF.
	**CK18**

Reference order | CK18.RF.XX

● Select finish





BOLD | BOLD LINE


REF 210001.RF | 210015.RF

PHOTOMETRY




OPAL

INCLUDED



RF INSTALATION KIT

PROFILE



ALARIK SLIM

Mastering light has never been so easy

Alarik is a set of modular designs for building or simplifying your lighting scheme. With Mini and Slim versions - and their own subfamilies - they adapt to every need.

It's playtime! Lighting design with Alarik is an exercise is creativity. Freedom, functionality, uniqueness... In short, unbridled flexibility and total control over the final result.

Jugar con luz nunca ha sido tan fácil

Alarik combina referencias modulares que permiten crecer o simplificar los puntos de luz, así como versiones Mini y Slim - a la vez con sus propias subfamilias - que se adaptan a cada necesidad.

¡Que empiece el juego! Iluminar con Alarik es lo más parecido a un ejercicio de ingenio. Libertad, funcionalidad, singularidad... en definitiva, diseño sin ataduras y siempre con el control absoluto del resultado a obtener.

BPMLighting®



FINISHES

● COLORS

DIMENSIONS

⬟ LENGTHS

PER METER

COMPONENTS

SLIM PATRICIA
SLIM LED BALL
SLIM TUBE
SLIM WALL WASHER
SLIM LENSES
SLIM MOTION LENSES
SLIM LED MODULES

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

Trimless mounting kit

new



MAGNET

ON DEMAND

Taylor your own design

48V. REMOTE

RECESSED FRAME

ALARIK SLIM

REF 20224.RF

INSTALLATIONS

ALUMINIUM | 0° | 0° | CRI ≥90 | IK06 | IP20 IP20 | LIFE 50000H | DIM OPTIONAL | 48V. REMOTE | INDOOR | 220-240 V 50-60 Hz | CE



.PN
PENDANT

·20224 ALARIK SLIM | PN
Pag. 175

.SR
SURFACE

·20224 ALARIK SLIM | SR
Pag. 175

.RF
RECESSED FRAME


·20224 ALARIK SLIM | RF
Pag. 175

.TR
TRIMLESS

·20224 ALARIK SLIM | TR
Pag. 175





ALARIK SLIM	REF.	DIMEN-SION ⬟	FINISH ●	SKETCH
	**20224**	**.01** 1 mt.	●	 54 37

POWER	DIMENSION ⬟	WATT
DR48	**.01**	75
	.02	120
	.03	200

INTEGRATED POWER	REF.	WATT
	**10246.DR** (404x43x22mm)	200W


Reference order | 20224.XX.RF.XX

Reference order | DR48.XX

Reference order | 10246.DR

SLIM PATRICIA	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	**11544**	**.01**	●	**.15 .38 .60**	.ST	.9	.27	576	8	48	**.DA .D1**	 85 35
							.30	607				
							.40	695				
	**11544**	**.02**	●	**.15 .38 .60**	.ST	.9	.27	1173	15	48	**.DA .D1**	 120 55
							.30	1181				
							.40	1207				

Reference order | 11544.XX.XX.XX.ST.9.XX.XX

SLIM PATRICIA ZOOM	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	**11546**	**.03**	●	**.15-36 .36-60**	.ST	.9	.27	2038	25	48	**.DA .D1**	145 70
							.30	2254				
							.40	2320				


Reference order | 11546.XX.XX.XX.ST.9.XX.XX

SLIM LED BALL	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	**11551**	**.01**	●	**.37**	.ST	.9	.27	760	8	48	**.DA .D1**	 183 300-1200 Ø80
							.30	808				
							.40	848				



Reference order | 11551.XX.XX.XX.ST.9.XX.XX

SLIM LED TUBE	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	**11552**	**.01** Ø40 x 40	●	**.20 .40**	.ST	.9	.27	808	14	48	**.DA .D1**	 400 Ø40
							.30	820				
							.40	881				
	11552	**.02** Ø60 x 60	●	**.20 .40**	.ST	.9	.27	1662	21	48	**.DA .D1**	 600 Ø60
							.30	1716				
							.40	1729				

Reference order | 11552XX.XX.XX.ST.9.XX.XX

SLIM WALL WASHER	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	**11550**	**.01**	**.BK-BK**	-	.ST	.9	.27	1100	15	48	**.DA .D1**	 91 185 25
							.30	1169				
							.40	1251				

Reference order | 11550.XX.XX.XX.ST.9.XX.XX

SLIM LENSES	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	**11548**	**.01**	**.BK-BK**	**.15 .38**	.ST	.9	.27	660	8	48	**.DA .D1**	 118 23 43
							.30	750				
							.40	827				
	**11548**	**.02**	**.BK-BK**	**.15 .38**	.ST	.9	.27	1320	15	48	**.DA .D1**	 231 23 43
							.30	1511				
							.40	1654				

Reference order | 11548.XX.XX.XX.ST.9.XX.XX

RECESSED FRAME

.RF

- Select finish



.WH-WH .BK-BK




ALARIK
SLIM

REF 20224.RF

PHOTOMETRY

SLIM PATRICIA

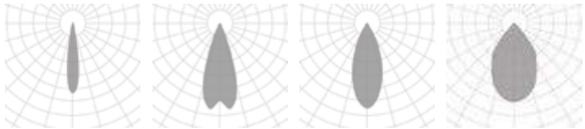

15º 36º 38º 60º

PHOTOMETRY


SLIM LED BALL SLIM WALL WASHER



XXº XXº


PHOTOMETRY

SLIM TUBE | SLIM LENSES




20º 40º




INCLUDED



RF INSTALATION KIT

SLIM MOTION LENSES	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	**11547**	**.01**	**.BK-BK**	**.15** **.38**	.ST	.9	**.27**	660	8	48	**.DA** **.D1**	
							.30	750				
							.40	827				

Reference order | ⬟ ● ■ ▼ 11547.XX.XX.XX.ST.9.XX.XX

SLIM LED MODULES	REF.	DIMEN-SION ⬟	FINISH ●	DIFUSSER ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	**11549**	**.01**	**.BK-BK**	**.OP**	.ST	.9	**.27**	558	9	48	**.DA** **.D1**	
							.30	560				
							.40	604				
	**11549**	**.02**	**.BK-BK**	**.OP**	.ST	.9	**.27**	1115	18	48	**.DA** **.D1**	
							.30	1120				
							.40	1208				
	**11549**	**.03**	**.BK-BK**	**.OP**	.ST	.9	**.27**	1670	24	48	**.DA** **.D1**	
							.30	1680				
							.40	1812				




Reference order | ⬟ ● ■ ▼ 11549.XX.XX.XX.ST.9.XX.XX


COMPONENTS

COVERT KIT	REF.	FINISH
	**TF19**	●

Reference order | ● TF19.RF.XX

JOINTS & CONNECTORS

LINEAR JOINT	ANGLE JOINT	ROOF-WALL JOINT
		
UR19	**UL19**	**UV19**

POWER FEEDER UNIT

ACC20224.CA

● Select finish




.WH-WH .BK-BK



ALARIK SLIM


REF 20224.RF

PHOTOMETRY




OPAL MICROPRISMATIC

INCLUDED



RF INSTALATION KIT

PROFILE





FINISHES

● COLORS

DIMENSIONS

● LENGTHS

PER METER

COMPONENTS

LED MODULES
LENSES
MINI TUBE
MINI TUBE STICK

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

Trimless mounting kit



ON DEMAND

Emergency Lighting*
Motion Detection
Taylor your own design
Special RAL Color
Tunable White

MODULIGHT

REF 10210.RF

INSTALLATIONS



.PN
PENDANT

·10210 MODULIGHT | PN
Pag. 175



.SR
SURFACE

·10210 MODULIGHT | SR
Pag. 175




.RF
RECESSED FRAME

·10210 MODULIGHT | RF
Pag. 175



.TR
TRIMLESS

·10210 MODULIGHT | TR
Pag. 175





MODULIGHT	REF.	DIMEN-SION ⬟ *2	FINISH ●	SKETCH
	**10210**	**.01** 1m	●	

Reference order | 10210.XX.RF.XX

DRIVER	DIMENSION * ⬟		DIMM ▼
DR10210	**.01**	0 - 15 W	**.DA .PU .D1**
	.02	16 - 30 W	
	.03	31 - 65 W	
	.04	66 - 90 W	


Reference order | DR10210.XX.XX

MINI TUBE	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	SKETCH
	**11526**	**.01** 100mm.	**.BK-BK .WH-WH**	**.15 .24 .38**	.ST	.9	**.27**	348	8	700	
							.30	362			
							.40	421			

Reference order | 11526.XX.XX.XX.ST.9.XX

MINI TUBE STICK	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	SKETCH
	11538	**.01** 100mm.	**.BK-BK .WH-WH**	**.15 .24 .38**	.ST	.9	**.27**	348	8	700	
							.30	362			
							.40	421			

Reference order | 11538.XX.XX.XX.ST.9.XX

LENSES	REF.	DIMEN-SIONS ⬟	SHAPE ◗	FINISH ●	OPTIC OPTIONS ■	POW-ER	CRI	K	LUMEN	WATT	mA	SKETCH
	**11525**	**.01** 29mm.	**.RO .SQ**	●	**.20 .40 .60**	.ST	.9	**.27**	142	2	700	
								.30	161			
								.40	212			
	**11525**	**.03** 80mm.	**.RO .SQ**	●	**.20 .40 .60**	..ST	.9	**.27**	426	6	700	
								.30	483			
								.40	636			
	**11525**	**.05** 133mm.	**.RO .SQ**	●	**.20 .40 .60**	.ST	.9	**.27**	710	10	700	
								.30	805			
								.40	1060			
	**11525**	**.10** 263mm.	**.RO .SQ**	●	**.20 .40 .60**	.ST	.9	**.27**	1420	20	700	
								.30	1611			
								.40	2120			

Reference order | 11525.XX.XX.XX.XX.ST.9.XX

COVER	REF.	FINISH ●
	**OPAQUE**	**.WH-WH .BK.BK**

Reference order | OPAQUE.XX


ROUND .RO
26x29,3 mm
Int Ø14,5 - Ext. Ø23 mm


SQUARE .SQ
26x29,3 mm
Ø14,5 mm

***1** Modular system that requires a technical drawing. *Sistema modular que require de un plano técnico.*

***2** Driver power must be at least 15% higher than the sum of the power of selected LED modules. *La potencia del driver deber ser por lo menos un 15% mayor que la suma de la potencia de los modulos LED elegidos.*

- Select lens finishes


.WH-WH .BK-BK .GC-GC .BM-BM .BS-BS .BC-BC .CR-CR .CB-CB .GY-GY .MG-MG .VC-VC .YM-YM



MODULIGHT

REF 10210.RF

PHOTOMETRY

MINI TUBE



15º 24º 38º

PHOTOMETRY

MINI LENSES


20º 40º 60º

LED MODULES	REF.	DIMEN-SION ⬟	FINISH ●	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	SKETCH
	11524	**.01** 281mm.	**.BK-BK**	**.OP** **.MP**	.HI	.9	.27	953	12	700	
							.30	972			
							.40	1141			
	11524	**.02** 562mm.	**.BK-BK**	**.OP** **.MP**	.HI	.9	.27	1906	24	700	
							.30	1944			
							.40	2282			
	11524	**.03** 843mm.	**.BK-BK**	**.OP** **.MP**	.HI	.9	.27	2859	36	700	
							.30	2916			
							.40	3423			
	11524	**.04** 1124mm.	**.BK-BK**	**.OP** **.MP**	.HI	.9	.27	3812	48	700	
							.30	3888			
							.40	4564			
	11524	**.05** 1405mm.	**.BK-BK**	**.OP** **.MP**	.HI	.9	.27	4765	60	700	
							.30	4860			
							.40	5705			
	11524	**.06** 1686mm.	**.BK-BK**	**.OP** **.MP**	.HI	.9	.27	5718	72	700	
							.30	5832			
							.40	6846			



Reference order | 11524.XX.XX.XX.HI.9.XX

COMPONENTS

COVERT KIT	REF.	FINISH
	**TF23**	●

Reference order | TF23.RF.XX

JOINTS

LINEAR JOINT	ANGLE JOINT	T-JOINT	CROSS JOINT	ROOF-WALL JOINT	FINISH
		**X**	**X**		●
UR23 XXXxXXmm	**UL23** XXXxXXXmm	**X**	**X**	**UV23** XXXxXXXmm	

Reference order | XX23.RF.XX

.RF

RECESSED FRAME

● Select finish






MODULIGHT

REF 10210.RF

PHOTOMETRY


LED MODULES



OPAL


MICROPRISMATIC

INCLUDED



RF INSTALATION KIT

PROFILE



VIO

Re -framing spaces

Focus on something specific or set the mood for the entire room.

Removable LED modules, a choice of fixed and adjustable assembly modes (4+4) and textured black and white finishes make them your best ally for achieving the pleasing effect you need. Welcome to your blank page.

Let your imagination fly, then watch as the VIO product family sets the stage. And when you have finished lighting, if you like, hit the Re-frame button.

Re-encuadre de espacios

Poner el foco en un elemento concreto o tamizar una estancia completa.

Gracias a sus módulos LED extraíbles, su capacidad de montaje en modo orientado o fijo (4+4) y sus acabados en negro texturizado o blanco, VIO se convierte en el mejor aliado para dibujar el escenario que necesitas.

Bienvenido a un espacio aún por definir. Imagínalo y deja que la familia de productos VIO defina el encuadre. ¡Y una vez iluminado, reencuádralo!



• FINISHES

COLORS

□ ■

DIMENSIONS

⬟ View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE

9º | 12º | 24º | 18º | 24º | 30º

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH


▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Wireless Control Options

new

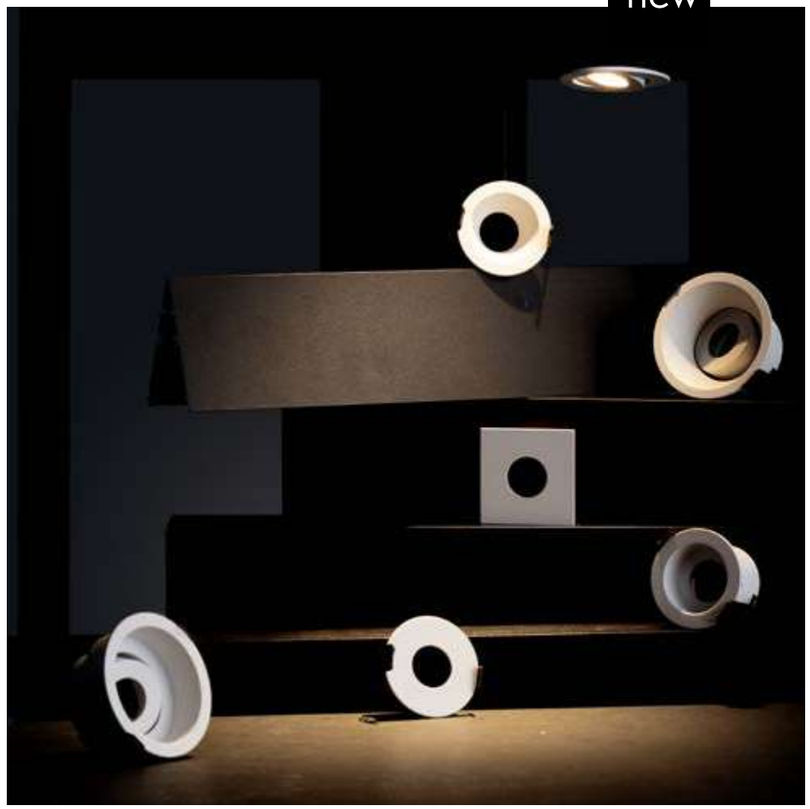

.RF

RECESSED FRAME


INSTALLATIONS




VIO


VIO | SQ | DEEP | DOME
VIO MOVE | SQ MOVE | DEEP MOVE | DOME MOVE


REF 2018X.RF


VIO MOVE	REF.	DIMENSIONS ⬟	FINISHES ●	SKETCH
	**20184**	**.01**	●	


VIO	REF.	DIMENSIONS ⬟	FINISHES ●	SKETCH
	**20185**	**.01**	●	


VIO SQ MOVE	REF.	DIMENSIONS ⬟	FINISHES ●	SKETCH
	**20180**	**.01**	●	

VIO SQ	REF.	DIMENSIONS ⬟	FINISHES ●	SKETCH
	**20181**	**.01**	●	



VIO DEEP MOVE	REF.	DIMENSIONS ⬟	FINISHES ●	SKETCH
	**20187**	**.01**	●	

VIO DEEP	REF.	DIMENSIONS ⬟	FINISHES ●	SKETCH
	**20186**	**.01**	●	

VIO DOME MOVE	REF.	DIMENSIONS ⬟	FINISHES ●	SKETCH
	**20182**	**.01**	●	

VIO DOME	REF.	DIMENSIONS ⬟	FINISHES ●	SKETCH
	**20183**	**.01**	●	

*⊥ .ST = H + 51mm | .HI = H + 76mm

VIOLED	REF.	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	**VL**	●	**LED**	**.9** **.12** **.30**	**.ST**	**.9**	**.27**	156	3	700	**.DA** **.PU** **.D1**	
							.30	165				
							.40	172				
	**VL**	●	**LED**	**.16** **.24** **.38**	**.HI**	**.9**	**.27**	391	7	500	**.DA** **.PU** **.D1**	
							.30	402				
							.40	458				

Reference order | ● ■ ▼ VL.XX.XX.XX.9.XX.XX

VIO DRIVERS	DIMENSION ⬟		DIMM ▼	POWER
DRVL	**.01**	2 - 3 vio	**.DA** **.PU** **.D1**	**.ST**
	.02	4 - 9 vio		
	.03	10 - 15 vio		
	.01	1 - 3 vio	**.DA** **.PU** **.D1**	**.HI**
	.02	4 - 8 vio		

Reference order | ⬟ ▼ DRVL.XX.XX.XX

● Select finishes



.WH-WH .BK-BK



VIO

VIO | SQ | DEEP | DOME
VIO MOVE | SQ MOVE | DEEP MOVE | DOME MOVE

REF 2018X.RF


PHOTOMETRY









TILTING 30º

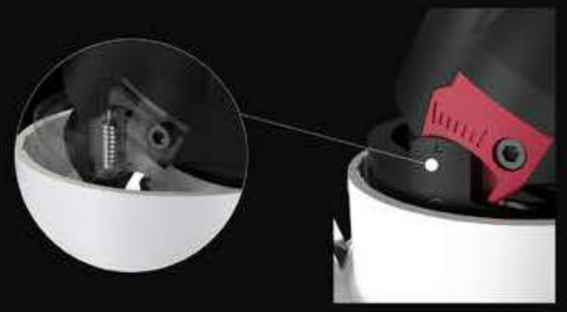

SPRING PLUNGERS BALL POINT SET SCREW

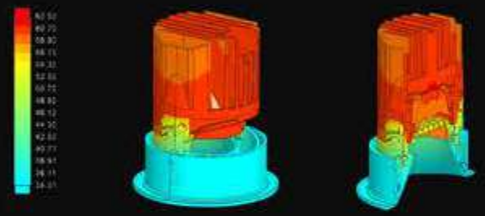

HEAT DISSIPATION THEORY

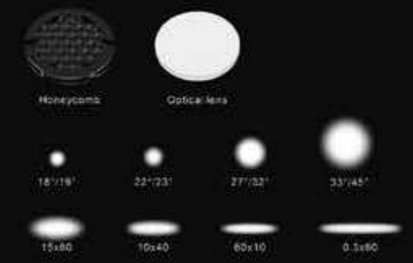

OPTICAL ACCESORIES

SASSY


new

A new era in LED lighting


Specific and efficient. This is your new go-to LED lighting solution. It gets five stars for its lighting capacity and has brilliant accessories that give you the highest possible performance.

Una nueva era en la iluminación LED

Especialización y eficacia. Así es el nuevo modelo de referencia en iluminación LED. Un 5 estrellas por su capacidad lumínica pero especialmente por los accesorios que aporta y acopla para conseguir el mayor rendimiento posible.

SASSY	REF.	DIMENSIONS ⬟	FINISHES ●	SKETCH
	**410002**	**.01**	**.WH.WH** **.BK-BK**	

Reference order | 410002.01.RF.XX

SASSY LED	REF.	DIMEN-SIONS ⬟	FINISHES ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	**120001**	**.01**	**.BK-BK**	**.15** **.26** **.38** **.50**	**.ST**	**.9**	**.27**	599	10	250	**.DA** **.PU** **.D1**	
							.30	732				
							.40	775				
					.MD	**.9**	**.27**	696	12	300	**.DA** **.PU** **.D1**	
							.30	872				
							.40	893				
					.HI	**.9**	**.27**	778	15	350	**.DA** **.PU** **.D1**	
							.30	947				
							.40	1033				
					.DW		**.DW**				**.DA**	

Reference order | 120001.01.BK-BK.XX.XX.X.XX.XX

• FINISHES

EXTERNAL COLORS

INTERNAL COLORS

DIMENSIONS

⬟ View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE

15º | 26º | 38º | 50º

POWER

STANDARD | MIDDLE | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | DW

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Tunable White
Wireless Control Options

new



RECESSED FRAME

.RF

SASSY

REF 410002.RF

INSTALLATIONS





.RF
RECESSED FRAME

·410002 SASSY | RF
Pag. 175

.TR
TRIMLESS

·410002 SASSY | TR
Pag. 175

PHOTOMETRY



26º 38º 50º

COMPONENTS

RING PART	FINISH ●
	.BK-BK .CH-CH .WH-WH .MS-MS .GF-GF
ACC410002.RR	

Reference order | ACC410002.RR.XX ●


RING PART			FINISH ●
			.BK-BK .WH-WH .BK-WH
ACC410002.TBR	ACC410002.OVR	ACC410002.CFR	

Reference order | ACC410002.XX.XX ●

ACCESORIES

OVAL FLOOD LENS	REF.	LENSE EFFECT ■	SKETCH
	ACC410002.OV	.03X60	
		.10X60	
		.10X40	
		.15X60	

Reference order | ACC410002.OV.XX ■

FLOOD LENS	REF.	LENSE EFFECT ■	SKETCH
	ACC410002	.ZSX1.3	
		.ZSX1.5	
		.ZSX2	
		.ZSX3	

Reference order | ACC410002.XX ■

HONEYCOMB

ACC410002.HC



RECESSED FRAME

.RF


● Select finish






SASSY

REF 410002.RF

SASSY	REF.	DIMENSIONS ⬟	FINISHES ●	SKETCH
	**410003**	**.01**	**.WH.WH** **.BK-BK**	

Reference order | 410003.01.RF.XX

SASSY LED	REF.	DIMENSIONS ⬟	FINISHES ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	**120001**	**.01**	**.BK-BK**	**.15** **.26** **.38** **.50**	**.ST**	**.9**	**.27**	599	10	250	**.DA** **.PU** **.D1**	
							.30	732				
							.40	775				
					.MD	**.9**	**.27**	696	12	300	**.DA** **.PU** **.D1**	
							.30	872				
							.40	893				
					.HI	**.9**	**.27**	778	15	350	**.DA** **.PU** **.D1**	
							.30	947				
							.40	1033				
					.DW		**.DW**				**.DA**	

Reference order | 120001.01.BK-BK.XX.XX.X.XX.XX

• FINISHES

EXTERNAL COLORS

INTERNAL COLORS

DIMENSIONS

⬟ View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE

15º | 26º | 38º | 50º

POWER

STANDARD | MIDDLE | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | DW

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Tunable White
Wireless Control Options

new



RECESSED FRAME

.RF

INSTALLATIONS



SASSY
SQ

REF 410003.RF

.RF
RECESSED FRAME

·410003 SASSY SQ | RF
Pag. 175


.TR
TRIMLESS

·410003 SASSY SQ | TR
Pag. 175

PHOTOMETRY



15º 26º 38º 50º

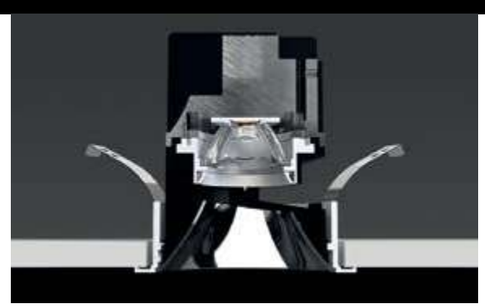

COMPONENTS


RING PART	FINISH ●
	.BK-BK .CH-CH .WH-WH .MS-MS .GF-GF
ACC410003.SQR	

Reference order | ACC410003.SQR.XX ●

ACCESORIES

OVAL FLOOD LENS	REF.	LENSE EFFECT ■	SKETCH
	ACC410003.OV	.03X60	
		.10X60	
		.10X40	
		.15X60	

Reference order | ACC410003.OV.XX ■

FLOOD LENS	REF.	LENSE EFFECT ■	SKETCH
	ACC410003	.ZSX1.3	
		.ZSX1.5	
		.ZSX2	
		.ZSX3	

Reference order | ACC410003.XX ■

HONEYCOMB

ACC410003.HC






● Select finish






SASSY
SQ

REF 410003.RF

MARTORELL	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	**20115**	**.01**	**.WH-WH** **.BK-BK**	**LED**	**.24** **.32**	**.ST**	**.9**	**.27**	175	3	700	**.DA***1 **.PU***1 **.D1***1	
								.30	188				
								.40	199				
	**20115**	**.02**	●	**LED**	**.15** **.24** **.32**	**.ST**	**.9**	**.27**	470	8	700	**.DA** **.PU** **.D1**	
								.30	498				
								.40	515				
	**20115**	**.03**	●	**LED**	**.24** **.32**	**.ST**	**.9**	**.27**	1071	15	350	**.DA** **.PU** **.D1**	
								.30	1156				
								.40	1198				

Reference order | 20115.XX.RF.XX.XX.ST.9.XX.XX

● Select finishes

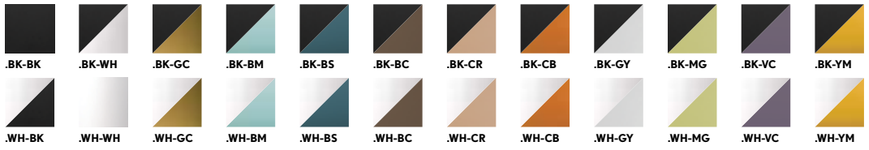

*1 Dimming options require the combination of a minimum of 2 luminaires. *Las opciones de regulación necesitan la combinación de un mínimo de 2 luminarias.*

• FINISHES

EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

15º | 24º | 32º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm (.02, .03)
Tunable White (.02, .03)
Honey Comb (.03)
Wireless Control Options
Special RAL Color



.RF

RECESSED FRAME

MARTORELL

REF 20115.RF



INSTALLATIONS



.PN
PENDANT

·20115 MARTORELL | PN
Pag. 175

.TK
TRACKLIGHT

·20115 MARTORELL | TK
Pag. 175

.SR
SURFACE

·20115 MARTORELL | SR
Pag. 175

.RF
RECESSED FRAME

·20115 MARTORELL | RF
Pag. 175

.TR
TRIMLESS

·20115 MARTORELL | TR
Pag. 175

PHOTOMETRY






MARTORELL MOVE	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	**20110**	**.01**	●	**LED**	**.20 .40 .60**	**.ST**	**.9**	**.27**	167	3	700	**.DA .PU .D1**	Ø26 mm 40mm 41 Ø26
								.30	184				
								.40	206				
	**20110**	**.02**	●	**LED**	**.18 .25 .35**	**.ST**	**.9**	**.27**	465	9	700	**.DA .PU .D1**	Ø52 mm 70mm 140 Ø40
								.30	507				
								.40	548				
	**20110**	**.03**	●	**LED**	**.18 .25 .35**	**.ST**	**.9**	**.27**	1058	15	350	**.DA .PU .D1**	Ø65mm 115mm 140 Ø60
								.30	1096				
								.40	1231				

Reference order | ⬟ ● ■ ▼ 20110.XX.RF.XX.XX.ST.9.XX.XX

● Select finishes

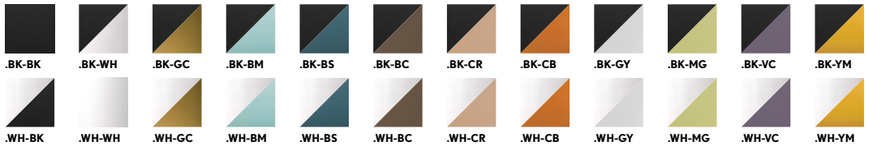

• FINISHES

EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

24º 38º | 15º 24º 38º | 15º 24º 38º 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm (.02, .03)
Tunable White (.02, .03)
Honey Comb (.03)
Wireless Control Options



.RF

RECESSED FRAME

INSTALLATIONS



MARTORELL MOVE

REF 20110.RF



.SR
SURFACE

·20110 MARTORELL MOVE | SR
Pag. 175

.RF
RECESSED FRAME

·20110 MARTORELL MOVE | SR
Pag. 175

PHOTOMETRY



18º 40º 60º



MARTORELL TÁRREGA	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	**20117**	**.01**	●	**LED**	**.25** **.38**	**.ST**	**.9**	**.27**	563	10	500	**.DA** **.PU** **.D1**	Ø 83mm, 140mm, 120, Ø 90
								.30	647				
								.40	719				

Reference order | 20117.XX.RF.XX.XX.ST.9.XX.XX

- Select finishes

.BK-BK .BK-WH .BK-GC .BK-BM .BK-BS .BK-BC .BK-CR .BK-CB .BK-GY .BK-MG .BK-VC .BK-YM

.WH-BK .WH-WH .WH-GC .WH-BM .WH-BS .WH-BC .WH-CR .WH-CB .WH-GY .WH-MG .WH-VC .WH-YM

• FINISHES

EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE

25º | 38º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options



.RF

RECESSED FRAME

INSTALLATIONS

ALUMINIUM PC | 10° | 0° | CRI ≥90 | IK06 | IP20 IP20 | LIFE 50000H | DIM OPTIONAL | REMOTE | INDOOR | 220-240 V 50-60 Hz | CE

MARTORELL TARREGA

REF 20117.RF



.RF
RECESSED FRAME

·20117 TARREGA | RF
Pag. 175

.TR
TRIMLESS


·20117 TARREGA | TR
Pag. 175

PHOTOMETRY




25º 38º




MARTORELL TÁRREGA SQ	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	**20116**	**.01**	●	**LED**	**.25** **.38**	**.ST**	**.9**	**.27**	563	10	500	**.DA** **.PU** **.D1**	
								.30	647				
								.40	719				

Reference order | 20116.XX.RF.XX.XX.ST.9.XX.XX

MARTORELL TÁRREGA SQ2	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	**20119**	**.01**	●	**LED**	**.25** **.38**	**.ST**	**.9**	**.27**	1126	20	500	**.DA** **.PU** **.D1**	
								.30	1294				
								.40	1438				

Reference order | 20119.XX.RF.XX.XX.ST.9.XX.XX

● Select finishes

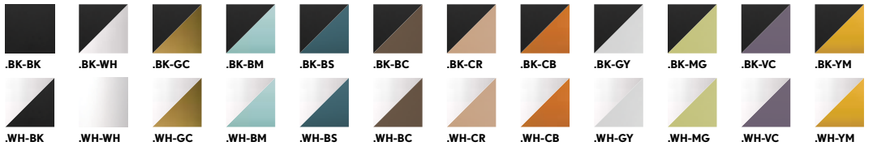

• FINISHES

EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE

25º | 38º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options



.RF

RECESSED FRAME

INSTALLATIONS



MARTORELL
TARREGA SQ | TARREGA SQ2

20116.RF | 20119.RF



.RF
RECESSED FRAME

·20116 TARREGA SQ | RF ·20119 TARREGA SQ2 | RF
Pag. 175


.TR
RECESSED FRAME




·20117 TARREGA SQ | TR
Pag. 175

PHOTOMETRY



25º 38º

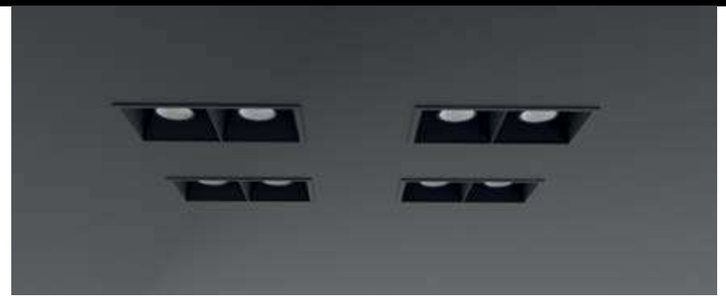

MARTORELL CRATE	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	**20176**	**.01**	●	**LED**	**.15 .24 .32**	**.ST**	**.9**	**.27**	470	8	700	**.DA .PU .D1**	
								.30	498				
								.40	515				
	**20176**	**.02**	●	**LED**	**.15 .24 .32**	**.ST**	**.9**	**.27**	940	16	700	**.DA .PU .D1**	
								.30	996				
								.40	1030				
	**20176**	**.03**	●	**LED**	**.15 .24 .32**	**.ST**	**.9**	**.27**	1410	24	700	**.DA .PU .D1**	
								.30	1494				
								.40	1545				

Reference order | ⬟ ● ■ ▼ 20176.XX.RF.XX.XX.ST.9.XX.XX

● Select finishes



• FINISHES

EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

15º | 24º | 32º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS


DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options

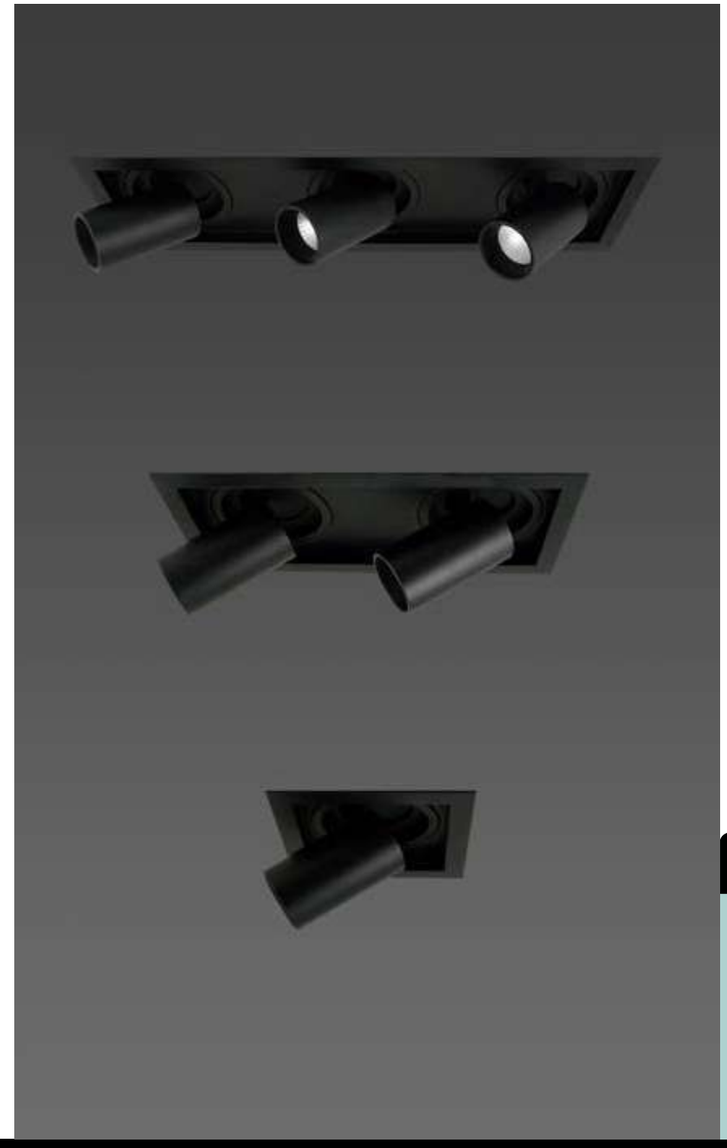

.RF
RECESSED FRAME

INSTALLATIONS



MARTORELL CRATE

REF 20176.RF



.SR
SURFACE

·20176 MARTORELL CRATE | SR
Pag. 175






.RF
RECESSED FRAME

·20176 MARTORELL CRATE | RF
Pag. 175

PHOTOMETRY



MARTORELL MINI CRATE	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	**20175**	**.01**	●	**LED**	**.20 .40 .60**	**.ST**	**.9**	**.27**	175	3	700	**.DA**[*1] **.PU**[*1] **.D1**[*1]	
								.30	188				
								.40	199				
	**20175**	**.02**	●	**LED**	**.20 .40 .60**	**.ST**	**.9**	**.27**	350	6	700	**.DA .PU .D1**	
								.30	276				
								.40	398				
	**20175**	**.03**	●	**LED**	**.20 .40 .60**	**.ST**	**.9**	**.27**	525	9	700	**.DA .PU .D1**	
								.30	564				
								.40	597				

Reference order | ⬟ ● ■ ▼ 20175.XX.RF.XX.XX.ST.9.XX.XX

● Select external - internal finishes



BK-BK WH-WH

*[1] Dimming options require the combination of a minimum of 2 luminaires. *Las opciones de regulación necesitan la combinación de un mínimo de 2 luminarias.*

• FINISHES

COLOR

□ ■

DIMENSIONS

⬟ View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

20º | 40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS


DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Wireless Control Options

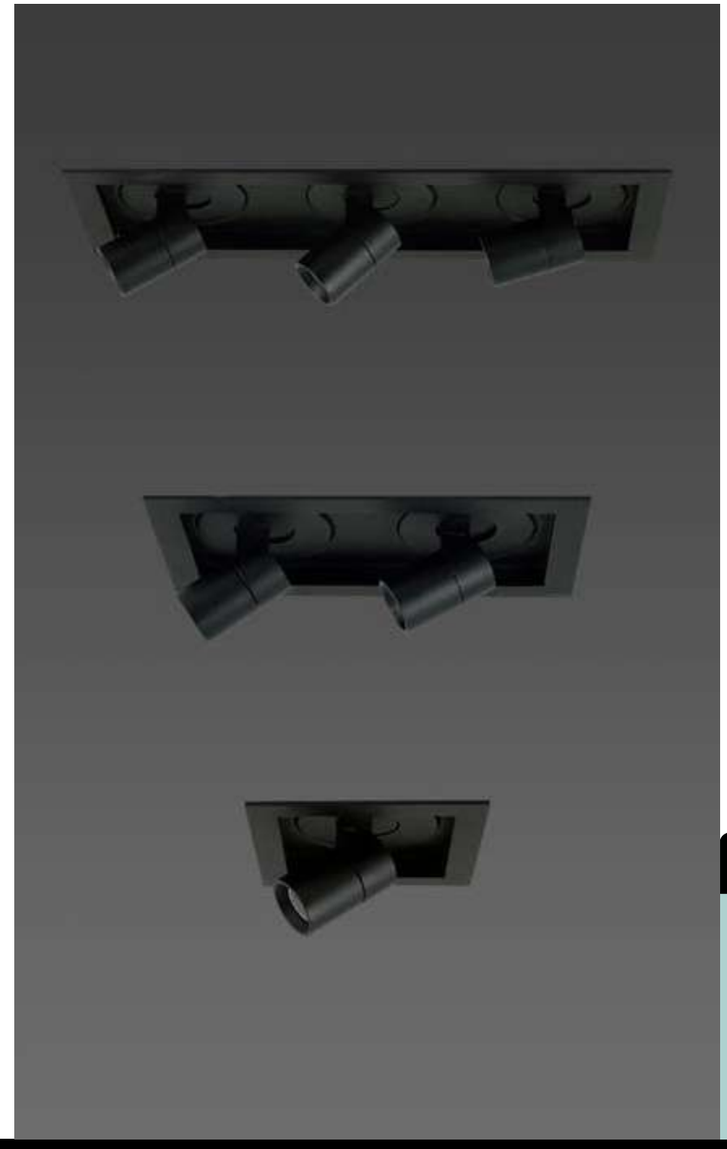

.RF

RECESSED FRAME

INSTALLATIONS





.SR
SURFACE

·20175 MARTORELL MINI CRATE | SR
Pag. 175

.RF
RECESSED FRAME

·20175 MARTORELL MINI CRATE | RF
Pag. 175






MARTORELL
MINI CRATE

REF 20175.RF

PHOTOMETRY



15º 32º 45º

KLIMT	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1 ▼	SKETCH
	**20134**	**.01**	●	**LED**	**.15 .24 .38**	**.ST**	**.9**	**.27**	395	8	700	**.DA .PU .D1**	
								.30	497				
								.40	550				
	**20134**	**.02**	●	**LED**	**.15 .24 .38 .60**	**.ST**	**.9**	**.27**	803	11	500	**.DA .PU .D1**	
								.30	983				
								.40	991				
	**20134**	**.03**	●	**LED**	**.15 .24 .38 .60**	**.ST**	**.9**	**.27**	1945	30	700	**.DA .PU .D1**	
								.30	2073				
								.40	2311				

Reference order | ⬟ ● ■ ▼


20134.XX.RF.XX.XX.ST.9.XX.XX

● Select external - internal finishes



BK-BK BK-GC WH-WH WH-GC

*1 Remote driver when dimmable. *Driver remoto cuando es dimable.*



• FINISHES

EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

15º 24º 38º | 15º 24º 38º 60º | 15º 24º 38º 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options
Special RAL Color



.RF

RECESSED FRAME

INSTALLATIONS



KLIMT

REF 20134.RF



.SR
SURFACE

·20134 KLIMT | SR
Pag. 175


.TK
TRACKLIGHT

·20134 KLIMT | TK
Pag. 175

.RF
RECESSED FRAME

·20134 KLIMT | RF
Pag. 175

PHOTOMETRY

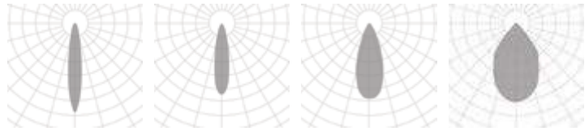

15º 24º 38º 60º



KLIMT FIX	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	**20135**	**.01**	●	**LED**	**.18 .24 .38**	**.ST**	**.9**	**.27**	395	7	700	**.DA .PU .D1**	Ø 75mm XXXmm 46 Ø83
								.30	497				
								.40	659				
	**20135**	**.02**	●	**LED**	**.18 .24 .38 .60**	**.ST**	**.9**	**.27**	803	11	500	**.DA .PU .D1**	Ø100mm XXXmm 50 Ø108
								.30	983				
								.40	991				
	**20135**	**.03**	●	**LED**	**.18 .24 .38 .60**	**.ST**	**.9**	**.27**	1945	30	700	**.DA .PU .D1**	Ø 125mm XXXmm 72 Ø135
								.30	2073				
								.40	2311				

Reference order | ⬟ ● ■ ▼ 20135.XX.RF.XX.XX.ST.9.XX.XX

● Select external - internal finishes



BK-BK BK-GC WH-WH WH-GC

• FINISHES

EXTERNAL | INTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

18º 24º 38º | 18º 24º 38º 60º | 18º 24º 38º 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options
Special RAL Color

new





.RF

RECESSED FRAME

INSTALLATIONS



KLIMT FIX

REF 20135.RF




.SR
SURFACE

·20135 KLIMT FIX | SR
Pag. 175

.RF
RECESSED FRAME

·20135 KLIMT FIX | RF
Pag. 175


PHOTOMETRY

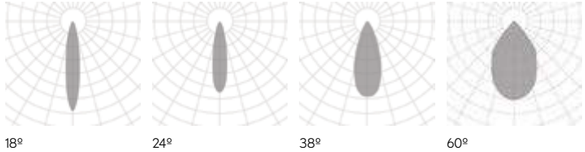

18º 24º 38º 60º

GEO	REF.	DIMEN-SIONS	FINISHES	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1 ▼	SKETCH
	**30511**	**.01**	●	**.15 .24 .38**	**.ST**	**.9**	**.27**	498	8	700	**.DA .PU .D1**	Ø59mm XXXmm Ø80 110
							.30	513				
							.40	622				
	**30511**	**.02**	●	**.15 .24 .38 .60**	**.ST**	**.9**	**.27**	1075	14	350	**.DA .PU .D1**	Ø74mm XXXmm Ø102 148
							.30	1114				
							.40	1319				
	**30511**	**.03**	●	**.15 .24 .38 .60**	**.ST**	**.9**	**.27**	1856	30	700	**.DA .PU .D1**	Ø59mm XXXmm Ø125 164
							.30	2031				
							.40	2529				

Reference order | 30511.XX.RF.XX.XX.ST.9.XX.XX



● Select external - internal finishes

BK-BK WH-WH

*1 Remote driver when dimmable. *Driver remoto cuando es dimable.*

• FINISHES

COLORS

DIMENSIONS

⬟ View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

15º 24º 38º | 15º 24º 38º 60º | 15º 24º 38º 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options
Special RAL Color

new



.RF

RECESSED FRAME

INSTALLATIONS



.SR
SURFACE

·30511 GEO | SR
Pag. 175



.TK
TRACKLIGHT

·30511 GEO | TK
Pag. 175



.RF
RECESSED FRAME

·30511 GEO | RF
Pag. 175








GEO

REF 30511.RF

PHOTOMETRY



15º 24º 38º 60º

CAN REVIEW	REF.	DIMEN-SIONS	FINISHES	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	**20149**	**.01**	●	**.40 .60**	**.ST**	**.9**	**.27**	711	10	250	**.DA .PU .D1**	
							.30	748				
							.40	776				
	**20149**	**.02**	●	**.40 .60**	**.ST**	**.9**	**.27**	1422	20	500	**.DA .PU .D1**	
							.30	1496				
							.40	1552				
	**20149**	**.03**	●	**.40 .60**	**.ST**	**.9**	**.27**	2132	30	750	**.DA .PU .D1**	
							.30	2244				
							.40	2327				
	**20149**	**.04**	●	**.40 .60**	**.ST**	**.9**	**.27**	3610	40	1000	**.DA .PU .D1**	
							.30	3690				
							.40	4200				
	**20149**	**.05**	●	**.40 .60**	**.ST**	**.9**	**.27**	4155	50	1200	**.DA .PU .D1**	
							.30	4462				
							.40	4961				

● Select external - internal finishes

BK-BK WH-WH

Reference order 20149.XX.RF.XX.XX.ST.9.XX.XX

• FINISHES

COLORS

DIMENSIONS

⬟ View in family specifications

.01 | .02 | .03 | .04 | .05

LIGHTING OPTIONS

■ BEAM ANGLE

40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options



RECESSED FRAME

.RF

INSTALLATIONS



CAN REVIEW

REF 20149.RF

PHOTOMETRY



40º 60º

.RF
RECESSED FRAME

·20149 CAN REVIEW | RF
Pag. 175

CATLI	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	**3010**	**.01**	●	**GU5.3**		GU5.3	-			8	-		Ø150mm LED 67mm GU 88mm
				GU10	**.GU**	GU10							
				LED	**.40** **.60**	**.ST** BPM50	**.9**	**.27**	526	7	350	**.DA** **.PU** **.D1**	25 Ø 93
								.30	570				
								.40	711				
						.HI BPM300		**.27**	707	10	500		
								.30	927				
								.40	635				
	**3010**	**.02**	●	**G53**		G53	-			8	-		Ø150mm LED 106mm GU/CD 163mm
				GU10	**.GU**	GU10							
				CDMR	**.CD**	GX8.5							
				LED	**.40** **.60**	**.ST** BPM3181	**.9**	**.27**	1370	16	500	**.DA** **.PU** **.D1**	26 Ø 170
								.30	1442				
								.40	1522				

Reference order ⬟ ● ■ ▼

3010.XX.RF.XX.XX.XX.X.XX.XX

DOWN

• FINISHES

COLORS

DIMENSIONS

⬟ View in family specifications

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

40º | 60º | GU

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options



.RF

RECESSED FRAME

● Select intenal - external finishes



.WH-WH .BK-BK .SA-SA

INSTALLATIONS

ALUMINIUM PC | 45° | 350° | CRI ≥90 | IK06 | IP20 IP23 | LIFE 50000H | DIM OPTIONAL | REMOTE | INDOOR | 220-240 V 50-60 Hz | CE

CATLI

REF 3010.RF



.RF
RECESSED FRAME

·3010 CATLI | RF
Pag. 175

PHOTOMETRY



40º 60º



CATLI SQ	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	**3011**	**.01**	●	**G5.3**		GU5.3	-			8	-		LED 67mm Ø80mm GU 88mm
				GU10	**.GU**	GU10							
				LED	**.40** **.60**	.ST BPM50	.9	**.27**	526	7	350	**.DA** **.PU** **.D1**	25 98x98
								.30	570				
								.40	711				
						.HI BPM300		**.27**	707	10	500		
								.30	927				
								.40	635				
	**3011**	**.02**	●	**G5.3**		G53	-			8	-		LED 106mm Ø150mm GU/CD 163mm
				GU10	**.GU**	GU10							
				CDMR	**.CD**	GX8.5							
				LED	**.40** **.60**	.ST BPM3181	.9	**.27**	1370	16	500	**.DA** **.PU** **.D1**	26 170x170
								.30	1442				
								.40	1522				

Reference order | ⬟ ● ■ ▼
3011.XX.RF.XX.XX.XX.X.XX.XX

● Select finishes


.WH-WH .BK-BK .SA-SA

• FINISHES

COLORS

DIMENSIONS

⬟ View in family specifications

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

40º | 60º | GU

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options



.RF
RECESSED FRAME

RECESSED FRAME

INSTALLATIONS

ALUMINIUM PC | 45° | 350° | CRI ≥90 | IK06 | IP20 IP23 | LIFE 50000H | DIM OPTIONAL | REMOTE | INDOOR | 220-240 V 50-60 Hz | CE

CATLI SQ

REF 3011.RF



.RF
RECESSED FRAME

·3011 CATLI SQ | PN
Pag. 175

PHOTOMETRY


40º 60º



CATLI SQ2	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	3012	.01	●	G5.3		GU5.3	-			16	-		150x80 mm; LED 67mm; GU 88mm
				GU10	.GU	GU10							
				LED	.40 .60	.ST BPM50	.9	.27	1052	14	350	.DA .PU .D1	94; 186
								.30	1140				
								.40	1422				
						.HI BPM300		.27	1414	20	500		
								.30	1854				
								.40	1270				

	3012	.02	●	G5.3		G53	-			16	-		320x160 mm; LED 106mm; GU/CD 163mm
				GU10	.GU	GU10							
				CDMR	.CD	GX8.5							
				LED	.40 .60	.ST BPM3181	.9	.27	2740	32	500	.DA .PU .D1	170; 340
								.30	2884				
								.40	3044				

Reference order | 3012.XX.RF.XX.XX.XX.X.XX.XX

⬟ ● ■ ▼

• FINISHES

COLORS

DIMENSIONS

⬟ View in family specifications

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

40º | 60º | GU

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options



.RF
RECESSED FRAME

● Select finishes



.WH-WH .BK-BK .SA-SA

INSTALLATIONS



CATLI SQ2

REF 3012.RF



.RF
RECESSED FRAME

·3012 CATLI SQ2 | PN
Pag. 175

PHOTOMETRY



40º



60º



CATLI SQ3	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	3013	.01	●	G5.3		GU5.3	-			50	-		256x80 mm; LED 67mm; GU 88mm
				GU10	.GU	GU10							
				LED	.40 .60	.ST BPM50	.9	.27	1440	7	350	.DA .PU .D1	94; 283
								.30	1542				
								.40	1695				
						.HI BPM300		.27	2058	10	500		
								.30	2202				
								.40	2430				
	3013	.02	●	G5.3		G53	-			100	-		480x160 mm; LED 106mm; GU/CD 163mm
				GU10	.GU	GU10				75			
				CDMR	.CD	GX8.5				70			
				LED	.40 .60	.ST BPM3181	.9	.27	4110	16	500	.DA .PU .D1	170; 500
								.30	4326				
								.40	4566				

Reference order | 3013.XX.RF.XX.XX.XX.X.XX.XX

• FINISHES

COLORS

DIMENSIONS

⬟ View in family specifications

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

40º | 60º | GU

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options



● Select finishes



.WH-WH .BK-BK .SA-SA

INSTALLATIONS



CATLI SQ3

REF 3013.RF



.RF
RECESSED FRAME

·3013 CATLI SQ3 | PN
Pag. 175

PHOTOMETRY




40º 60º



CATLI HALKA	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	3017	.01	●	G5.3		GU5.3	-			50	-		Ø70mm, LED 55mm, GU 85mm
				GU10	.GU	GU10				50			
				LED	.40 .60	.ST BPM50	.9	.27	480	7	350	.DA .PU .D1	27, Ø83
								.30	514				
								.40	565				
						.HI BPM300		.27	686	10	500		
								.30	734				
								.40	810				

Reference order | 3017.XX.RF.XX.XX.XX.X.XX.XX

CATLI HALKASQ	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	3021	.01	●	G5.3		GU5.3	-			50	-		Ø68mm, LED 55mm, GU 85mm
				GU10	.GU	GU10				50			
				LED	.40 .60	.ST BPM50	.9	.27	480	7	350	.DA .PU .D1	27, 80X80
								.30	514				
								.40	565				
						.HI BPM300		.27	686	10	500		
								.30	734				
								.40	810				

Reference order | 3021.XX.RF.XX.XX.XX.X.XX.XX

● Select finishes

.WH-WH .SA-SA

• FINISHES

COLORS



DIMENSIONS

⬟ View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE

40º | 60º | GU

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options



RECESSED FRAME

.RF

INSTALLATIONS



CATLI HALKA | HALKA SQ

REF 3017.RF | 3021.RF

.RF
RECESSED FRAME

·3017 CATLI HALKA | PN ·3021 CATLI HALKA SQ | RF
Pag. 175

PHOTOMETRY



40º 60º

CATLI ODALKI	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	3018	.01	●	G5.3		GU5.3	-			50	-		Ø60mm, LED 55mm, GU 85mm
				GU10	.GU	GU10				50			
				LED	.40 .60	.ST BPM50	.9	.27	480	7	350	.DA .PU .D1	Ø75
								.30	514				
								.40	565				
						.HI BPM300		.27	686	10	500		
								.30	734				
								.40	810				

Reference order | 3018.XX.RF.XX.XX.XX.X.XX.XX

• FINISHES

COLORS

DIMENSIONS

⬟ View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE

40º | 60º | GU

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options



● Select finishes

.WH-WH .SA-SA

INSTALLATIONS



CATLI ODALKI

REF 3018.RF

PHOTOMETRY



40º 60º


.RF
RECESSED FRAME

·30018 CATLI ODALKI | RF
Pag. 175

CATLI CLASSIC	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	**3005**	**.01**	●	**G5.3**		GU5.3	-			50	-		Ø60mm LED 55mm GU 100mm
				GU10	**.GU**	GU10				50			
				LED	**.40 .60**	**.ST** BPM50	**.9**	**.27**	480	7	350	**.DA .PU .D1**	25 Ø85
								.30	514				
								.40	565				
						.HI BPM300		**.27**	686	10	500		
								.30	734				
								.40	810				
	**3005**	**.02**	●	**G5.3**		G53	-			50	-		Ø130mm LED 55mm GU 100mm
				GU10	**.GU**	GU10				50			
				LED	**.40 .60**	**.ST** BPM3181	**.9**	**.27**	1370	16	500	**.DA .PU .D1**	34 Ø150
								.30	1442				
								.40	1522				

Reference order | 3005.XX.RF.XX.XX.XX.X.XX.XX

● Select finishes



.WH-WH .BK-BK .SA-SA

• FINISHES

COLORS

DIMENSIONS

⬟ View in family specifications

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

40º | 60º | GU

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options



.RF

RECESSED FRAME

INSTALLATIONS



CATLI CLASSIC

REF 3005.RF

PHOTOMETRY



40º 60º



.RF
RECESSED FRAME

·3005 CATLI CLASSIC | RF
Pag. 175

CATLI CLASSIC SQ	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	3006	.01	●	G5.3		GU5.3	-			50	-		Ø60mm LED 55mm GU 100mm
				GU10	.GU	GU10				50			
				LED	.40 .60	.ST BPM50	.9	.27	480	7	350	.DA .PU .D1	26 85x85
								.30	514				
								.40	565				
						.HI BPM300		.27	686	10	500		
								.30	734				
								.40	810				
	3006	.02	●	G5.3		G53	-			50	-		Ø132mm LED 55mm GU 100mm
				GU10	.GU	GU10				50			
				LED	.40 .60	.ST BPM3181	.9	.27	1370	16	500	.DA .PU .D1	34 150x150
								.30	1442				
								.40	1522				

Reference order | 3006.XX.RF.XX.XX.XX.X.XX.XX

• FINISHES

COLORS

DIMENSIONS

⬟ View in family specifications

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

40º | 60º | GU

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options



.RF

RECESSED FRAME

● Select finishes



.WH-WH .BK-BK .SA-SA

INSTALLATIONS




CATLI
CLASSIC SQ

REF 3006.RF

PHOTOMETRY



40º 60º

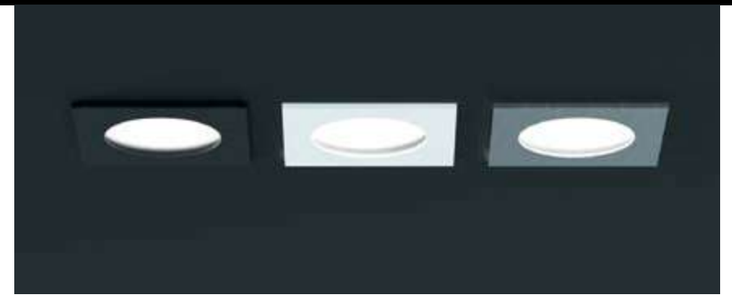


.RF
RECESSED FRAME

·3006 CATLI CLASSIC SQ | RF
Pag. 175

CATLI CARE	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	**3000**	**.01**	●	**G5.3**		GU5.3	-			50	-		Ø85mm / LED 70mm / GU 85mm
				GU10	**.GU**	GU10				50			
				LED	**.40 .60**	.ST BPM50	**.9**	**.27**	480	7	350	**.DA .PU .D1**	90 x 90
								.30	514				
								.40	565				
						.HI BPM300		**.27**	686	10	500		
								.30	734				
								.40	810				

Reference order | 3000.XX.RF.XX.XX.XX.X.XX.XX

CATLI CARE 2	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	**3001**	**.01**	●	**G5.3**		GU5.3	-			100	-		150x70 mm / LED 70mm / GU 85mm
				GU10	**.GU**	GU10				100			
				LED	**.40 .60**	.ST BPM50	**.9**	**.27**	960	14	350	**.DA .PU .D1**	180 x 90
								.30	1028				
								.40	1130				
						.HI BPM300		**.27**	1372	20	500		
								.30	1468				
								.40	1620				

Reference order | 3001.XX.RF.XX.XX.XX.X.XX.XX

● Select finishes



.WH-WH .BK-BK .SA-SA

• FINISHES

COLORS

DIMENSIONS

⬟ View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE

40º | 60º | GU

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options



.RF

RECESSED FRAME

INSTALLATIONS



CATLI
CARE | CARE 2

REF 3000.RF | 3001.RF

.RF
RECESSED FRAME

·3000 CATLI CARE ·3001 CATLI CARE 2 |RF
Pag. 175

PHOTOMETRY



40º 60º

ALDAIA	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	**20157**	**.01**	●	**.LED**	**.OP**	**.ST**	**.9**	**.27**	691	9	300	**.DA .PU .D1**	Ø90 mm 95mm 75 Ø103
								.30	727				
								.40	761				
	**20157**	**.02**	●	**.LED**	**.OP**	**.ST**	**.9**	**.27**	1227	16	500	**.DA .PU .D1**	Ø130mm 105mm 85 Ø145
								.30	1292				
								.40	1309				
	**20157**	**.03**	●	**.LED**	**.OP**	**.ST**	**.9**	**.27**	2394	32	1050	**.DA .PU .D1**	Ø185mm 105mm 85 Ø200
								.30	2520				
								.40	2678				

Reference order | 20157.XX.RF.XX.XX.ST.9.XX.XX

⬟ ● ■ ▼

• FINISHES

COLORS

□ ■

DIMENSIONS

⬟ View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

■ DIFFUSER

OPAL

POWERS

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN



ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options

● Select finishes



BK-BK WH-WH

INSTALLATIONS



ALDAIA

REF 20157.RF



.RF
RECESSED FRAME




·20157 ALDAIA | RF
Pag. 175

PHOTOMETRY



OPAL



ALDAIASQ	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	**20120**	**.01**	●	**.LED**	**.OP**	**.ST**	**.9**	**.27**	691	9	300	**.DA .PU .D1**	
								.30	727				
								.40	761				
	**20120**	**.02**	●	**.LED**	**.OP**	**.ST**	**.9**	**.27**	1227	16	500	**.DA .PU .D1**	
								.30	1292				
								.40	1309				
	**20120**	**.03**	●	**.LED**	**.OP**	**.ST**	**.9**	**.27**	2394	32	1050	**.DA .PU .D1**	
								.30	2520				
								.40	2678				

Reference order | 20120.XX.RF.XX.XX.ST.9.XX.XX

• FINISHES

COLORS

DIMENSIONS

⬟ View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

■ DIFFUSER

OPAL

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options



.RF

RECESSED FRAME

● Select finishes



BK-BK WH-WH

INSTALLATIONS



ALDAIA SQ

REF 20120.RF

PHOTOMETRY




OPAL



.RF
RECESSED FRAME

·20120 ALDAIA SQ | RF
Pag. 175

VADI	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	**3177**	**.01**	●	**.LED**	**.40** **.60**	**.ST**	**.9**	**.27**	703	10	500	**.DA** **.PU** **.D1**	Ø70 mm 100mm  80 Ø82
								.30	740				
								.40	784				
	**3177**	**.02**	●	**.LED**	**.40** **.60**	**.ST**	**.9**	**.27**	1373	16	500	**.DA** **.PU** **.D1**	Ø114mm 126mm  106 Ø124
								.30	1445				
								.40	1522				

Reference order | ⬟ ● ■ ▼ 3177.XX.RF.XX.XX.ST.9.XX.XX

• FINISHES

COLORS

□

DIMENSIONS

⬟ View in family specifications

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options



.RF

RECESSED FRAME

● Select finishes

WH-WH

INSTALLATIONS



VADI

REF 3177.RF



.RF
RECESSED FRAME

·3177 VADI | RF
Pag. 175

PHOTOMETRY



40º



60º



KONI	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	**3161**	**.01**	**.WH-WH .BK-BK**	**G5.3**		GU5.3	-			50	-		Ø75 mm · LED 94mm · GU 121mm · 39 · Ø80
				GU10	**.GU**	GU10				50			
				LED	**.40 .60**	**.ST** BPM50	**.9**	**.27**	480	7	350	**.DA .PU .D1**	
								.30	514				
								.40	565				
	**3161**	**.02**	●	**G5.3**		GU5.3	-			50	-		Ø93 mm · LED 86mm · GU 143mm · 61 · Ø98
				GU10	**.GU**	GU10				50			
				LED	**.40 .60**	**.ST** BPM50	**.9**	**.27**	480	7	350	**.DA .PU .D1**	
								.30	514				
								.40	565				
	**3161**	**.03**	**.WH-WH .BK-BK**	**G5.3**		G53	-			100	-		Ø167mm · GU/CD 219mm · 82 · Ø180
				GU10	**.GU**	GU10				75			
				CDMR	**.CD**	GX8.5				70			

Reference order | 3161.XX.RF.XX.XX.XX.X.XX.XX

● Select finishes



.WH-WH .BK-BK .GY-GY **.SA-SA**

• FINISHES

EXTERNAL | INTERNAL COLOR

DIMENSIONS

⬟ View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options



RECESSED FRAME

INSTALLATIONS

ALUMINIUM PC · 45° · 0° · CRI ≥90 · IK06 · IP20 IP43 · LIFE 50000H · DIM OPTIONAL · REMOTE · INDOOR · 220-240 V 50-60 Hz · CE

KONI

REF 3161.RF

.RF
RECESSED FRAME

·3161 KONI | RF
Pag. 175

PHOTOMETRY



40º 60º

KONI SQ	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	**3169**	**.01**	●	**.G5**	GU5.3		-			50	-		Ø75 mm LED 86mm GU 143mm
				.GU	GU10					50			
				LED	**.40** **.60**	**.ST** BPM50	**.9**	**.27**	480	7	350	**.DA** **.PU** **.D1**	
								.30	514				
								.40	565				

Reference order ⬟ ● ■ ▼

3169.XX.RF.XX.XX.XX.X.XX.XX

• FINISHES

COLORS

□ ■

DIMENSIONS

⬟ View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE

40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options

new



.RF
RECESSED FRAME

RECESSED FRAME

● Select finishes



BK-BK WH-WH

INSTALLATIONS



KONI SQ

REF 3169.RF



.RF
RECESSED FRAME

·3169 KONI SQ | RF
Pag. 175

PHOTOMETRY



40º



60º



KONI DEEP	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	**3171**	**.01**	●	**LED**	**.40** **.60**	**.ST**	**.9**	**.27**	395	7	700	**.DA** **.PU** **.D1**	ØXX mm XXXmm
								.30	497				
								.40	659				

Reference order 3171.XX.RF.XX.XX.ST.9.XX.XX

● Select finishes



BK-BK WH-WH

• FINISHES

COLORS

□ ■

DIMENSIONS

⬟ View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options



new

.RF

RECESSED FRAME

INSTALLATIONS



KONI DEEP

REF 3171.RF



.RF
RECESSED FRAME

·3171 KONI DEEP | RF
Pag. 175

PHOTOMETRY



40º 60º

KONI TURTA	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	**3156**	**.01**	●	**.LED**	**.40** **.60**	**.ST**	**.9**	**.27**	513	6	350	**.DA** **.PU** **.D1**	Ø74 mm 104mm 84 Ø81
								.30	540				
								.40	574				
	**3156**	**.02**	●	**.LED**	**.40** **.60**	**.ST**	**.9**	**.27**	513	6	350	**.DA** **.PU** **.D1**	Ø90 mm 105mm 85 Ø100
								.30	540				
								.40	574				

Reference order | 3156.XX.RF.XX.XX.ST.9.XX.XX

• FINISHES

COLORS

□ ■

DIMENSIONS

⬟ View in family specifications

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

40º | 60º

POWER

40º | 60º

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN



ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options

● Select finishes



BK-BK WH-WH

.RF
RECESSED FRAME

RECESSED FRAME

INSTALLATIONS



KONI
TURTA

REF 3156.RF




·3156 KONI TURTA | RF
Pag. 175

PHOTOMETRY




40º 60º




CUBE SQ	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	**8201**	**.01**	●	**.LED**	**.24 .40 .60**	**.ST**	**.9**	**.27**	738	11	350	**.DA .PU .D1**	
								.30	862				
								.40	929				

Reference order ⬟ ● ■ ▼ 8201.01.RF.XX.XX.ST.9.XX.XX


CUBE SQ2	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	**8202**	**.01**	●	**.LED**	**.24 .40 .60**	**.ST**	**.9**	**.27**	1476	22	350	**.DA .PU .D1**	
								.30	1724				
								.40	1857				

Reference order ⬟ ● ■ ▼ 8202.01.RF.XX.XX.ST.9.XX.XX

CUBE SQ3	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	**8203**	**.01**	●	**.LED**	**.24 .40 .60**	**.ST**	**.9**	**.27**	2214	33	350	**.DA .PU .D1**	
								.30	2586				
								.40	2786				

Reference order ⬟ ● ■ ▼ 8203.01.RF.XX.XX.ST.9.XX.XX

● Select finishes



• FINISHES

EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ View in family specifications

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

24º | 40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options



.RF

RECESSED FRAME

INSTALLATIONS



CUBE
SQ | SQ2 | SQ3

REF 8201.RF | REF 8202.RF | REF 8203.RF

.SR
SURFACE

·8201 CUBE ·8202 CUBE 2 ·8203 CUBE 3 | SR
Pag. 175

.RF
RECESSED FRAME


·8201 CUBE ·8202 CUBE 2 ·8203 CUBE 3 | RF
Pag. 175

.TR
TRIMLESS


·8201 CUBE ·8202 CUBE 2 ·8203 CUBE 3 | TR
Pag. 175

PHOTOMETRY




GRAN CUBE SQ	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	**8201**	**.02**	●	**LED**	**.20 .40 .60**	**.ST**	**.9**	**.27**	1242	19	500	**.DA .PU .D1**	
								.30	1345				
								.40	1867				

Reference order ⬟ ● ■ ▼ 8201.02.RF.XX.XX.ST.9.XX.XX

GRAN CUBE SQ2	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	**8202**	**.02**	●	**LED**	**.20 .40 .60**	**.ST**	**.9**	**.27**	2484	38	500	**.DA .PU .D1**	
								.30	2670				
								.40	3734				

Reference order ⬟ ● ■ ▼ 8202.02.RF.XX.XX.ST.9.XX.XX

GRAN CUBE SQ3	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	**8203**	**.02**	●	**LED**	**.20 .40 .60**	**.ST**	**.9**	**.27**	3726	58	500	**.DA .PU .D1**	
								.30	4035				
								.40	5601				

Reference order ⬟ ● ■ ▼ 8203.02.RF.XX.XX.ST.9.XX.XX

● Select finishes



• FINISHES

EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ View in family specifications

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

24º | 40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options



.RF

RECESSED FRAME

INSTALLATIONS



GRAN CUBE
SQ | SQ2 | SQ3

REF 8201.RF | REF 8202.RF | REF 8203.RF

.SR
SURFACE

·8201 CUBE ·8202 CUBE 2 ·8203 CUBE 3 | SR
Pag. 175

.RF
RECESSED FRAME


·8201 CUBE ·8202 CUBE 2 ·8203 CUBE 3 | RF
Pag. 175

.TR
TRIMLESS


·8201 CUBE ·8202 CUBE 2 ·8203 CUBE 3 | TR
Pag. 175

PHOTOMETRY



CUBE SPOT	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	**3120**	**.01**	●	**.LED**	**.40** **.60**	**.ST**	**.9**	**.27**	673	12	250	**.DA** **.PU** **.D1**	
								.30	737				
								.40	801				

Reference order 3120.XX.RF.XX.XX.ST.9.XX.XX

CUBE SPOT 2	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	**3131**	**.01**	●	**.LED**	**.40** **.60**	**.ST**	**.9**	**.27**	1345	23	250	**.DA** **.PU** **.D1**	
								.30	1475				
								.40	1603				

Reference order 3131.XX.RF.XX.XX.ST.9.XX.XX

● Select finishes

BK-BK WH-WH

● FINISHES

COLORS

DIMENSIONS

⬟ View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE

40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options



.RF

RECESSED FRAME

INSTALLATIONS

ALUMINIUM PC | 0° | 0° | CRI ≥90 | IK06 | IP20 IP43 | L70 50000H | DIM OPTIONAL | | REMOTE | INDOOR | | | 220-240 V 50-60 Hz | CE

CUBE
SPOT | SPOT 2

REF 3120.RF | 3131.RF


.RF
RECESSED FRAME

·3120 CUBE SPOT ·3131 CUBE SPOT 2 | RF
Pag. 175


PHOTOMETRY




40º



60º

CUBE SPOT MOVE	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	**3121**	**.01**	●	**.LED**	**.40** **.60**	**.ST**	**.9**	**.27**	810	11	350	**.DA** **.PU** **.D1**	
								.30	832				
								.40	1014				

Reference order 3121.XX.RF.XX.XX.ST.9.XX.XX

CUBE SPOT 2 MOVE	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	**3136**	**.01**	●	**.LED**	**.40** **.60**	**.ST**	**.9**	**.27**	1621	22	350	**.DA** **.PU** **.D1**	
								.30	1664				
								.40	2028				

Reference order 3136.XX.RF.XX.XX.ST.9.XX.XX

● Select finishes

BK-BK WH-WH

• FINISHES

EXTERNAL | INTERNAL COLOR

□ ■

DIMENSIONS

⬟ View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE

40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options



.RF

RECESSED FRAME

INSTALLATIONS



CUBE
SPOT MOVE | SPOT MOVE 2

REF 3121.RF | 3136.RF


PHOTOMETRY




40º 60º

.RF
RECESSED FRAME

·3121 CUBE SPOT MOVE ·3136 CUBE SPOT MOVE 2 | RF
Pag. 175

CUBE SPOT SQ MOVE	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	**3134**	**.01**	●	**.LED**	**.40** **.60**	**.ST**	**.9**	**.27**	810	11	350	**.DA** **.PU** **.D1**	
								.30	832				
								.40	1014				

Reference order 3134.XX.RF.XX.XX.ST.9.XX.XX

CUBE SPOT SQ 2 MOVE	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	**3135**	**.01**	●	**.LED**	**.40** **.60**	**.ST**	**.9**	**.27**	1621	22	350	**.DA** **.PU** **.D1**	
								.30	1664				
								.40	2028				

Reference order 3135.XX.RF.XX.XX.ST.9.XX.XX

● Select finishes



BK-BK WH-WH

• FINISHES

COLORS

DIMENSIONS

⬟ View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE

40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options



.RF

RECESSED FRAME

INSTALLATIONS



CUBE
SPOT SQ MOVE | SPOT SQ2 MOVE

REF 3134.RF | REF 3135.RF





PHOTOMETRY



40º 60º

.RF
RECESSED FRAME

·3134 CUBE SPOT SQ MOVE ·3135 CUBE SPOT SQ 2 MOVE | RF
Pag. 175

LENT MODULAR	REF.	DIMEN-SIONS	FINISHES	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	**10216**	**.01**	●	**.LED**	**.20 .40 .60**	**.ST**	**.9**	**.27**	152	6	580	**.DA .PU .D1**	
								.30	181				
								.40	185				
	**10216**	**.03**	●	**.LED**	**.20 .40 .60**	**.ST**	**.9**	**.27**	448	8	700	**.DA .PU .D1**	
								.30	458				
								.40	500				
	**10216**	**.05**	●	**.LED**	**.20 .40 .60**	**.ST**	**.9**	**.27**	774	14	700	**.DA .PU .D1**	
								.30	892				
								.40	929				
	**10216**	**.10**	●	**.LED**	**.20 .40 .60**	**.ST**	**.9**	**.27**	1519	24	700	**.DA .PU .D1**	
								.30	1814				
								.40	1871				

Reference order | 10216.XX.RF.XX.XX.ST.9.XX.XX

● Select finishes



• FINISHES

EXTERNAL COLOR



INTERNAL COLOR



DIMENSIONS

⬟ View in family specifications

.01 | .03 | .05 | .10

LIGHTING OPTIONS

■ BEAM ANGLE

20º | 40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS


DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options

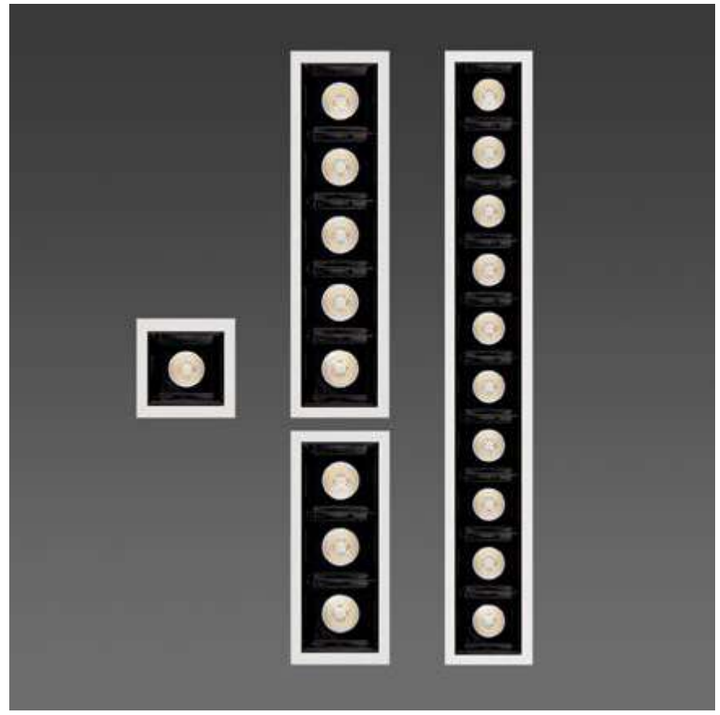

.RF

RECESSED FRAME

INSTALLATIONS



.RF
RECESSED FRAME

·10216 LENT MODULAR | RF
Pag. 175

.TR
TRIMLESS

·10216 LENT MODULAR | TR
Pag. 175



LENT MODULAR

REF 10216.RF

PHOTOMETRY










SQUARE | SQ



ROUND | RD

OKKO	REF.	DIMEN-SIONS	FINISHES	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	**410012**	**.01**	●	**.LED**	**.20 .40 .60**	**.ST**	**.9**	**.27**	XXX	1	100	**.DA .PU .D1**	
								.30	XXX				
								.40	XXX				
	**410012**	**.02**	●	**.LED**	**.20 .40 .60**	**.ST**	**.9**	**.27**	XXX	2	200	**.DA .PU .D1**	
								.30	XXX				
								.40	XXX				
	**410012**	**.03**	●	**.LED**	**.20 .40 .60**	**.ST**	**.9**	**.27**	XXX	3	300	**.DA .PU .D1**	
								.30	XXX				
								.40	XXX				
	**410012**	**.05**	●	**.LED**	**.20 .40 .60**	**.ST**	**.9**	**.27**	XXX	5	500	**.DA .PU .D1**	
								.30	XXX				
								.40	XXX				
	**410012**	**.10**	●	**.LED**	**.20 .40 .60**	**.ST**	**.9**	**.27**	XXX	10	500	**.DA .PU .D1**	
								.30	XXX				
								.40	XXX				

Reference order | 410012.XX.RF.XX.XX.ST.9.XX.XX

● Select finishes



• FINISHES

EXTERNAL COLOR



INTERNAL COLOR



DIMENSIONS

⬟ View in family specifications

.01 | .03 | .05 | .10

LIGHTING OPTIONS

■ BEAM ANGLE

20º | 40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options



.RF
RECESSED FRAME

RECESSED FRAME

INSTALLATIONS



OKKO

REF 410012.RF






.RF
RECESSED FRAME

·XXX OKKO | RF
Pag. 175

PHOTOMETRY





OVALI	REF.	DIMEN-SIONS	FINISHES	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	**410013**	**.01**	●	**.LED**	**.20 .40 .60**	**.ST**	**.9**	**.27**	XXX	1	100	**.DA .PU .D1**	
								.30	XXX				
								.40	XXX				
	**410013**	**.02**	●	**.LED**	**.20 .40 .60**	**.ST**	**.9**	**.27**	XXX	2	200	**.DA .PU .D1**	
								.30	XXX				
								.40	XXX				
	**410013**	**.03**	●	**.LED**	**.20 .40 .60**	**.ST**	**.9**	**.27**	XXX	3	300	**.DA .PU .D1**	
								.30	XXX				
								.40	XXX				
	**410013**	**.05**	●	**.LED**	**.20 .40 .60**	**.ST**	**.9**	**.27**	XXX	5	500	**.DA .PU .D1**	
								.30	XXX				
								.40	XXX				
	**410013**	**.10**	●	**.LED**	**.20 .40 .60**	**.ST**	**.9**	**.27**	XXX	10	500	**.DA .PU .D1**	
								.30	XXX				
								.40	XXX				

Reference order | 410013.XX.RF.XX.XX.ST.9.XX.XX

● Select finishes



• FINISHES

EXTERNAL COLOR



INTERNAL COLOR



DIMENSIONS

⬟ View in family specifications

.01 | .03 | .05 | .10

LIGHTING OPTIONS

■ BEAM ANGLE

20º | 40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options



.RF
RECESSED FRAME

INSTALLATIONS



OVALI

REF 410013.RF




.RF
RECESSED FRAME

·XXX OVALI | RF
Pag. 175

PHOTOMETRY






LENT MOTION	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	**10212**	**.03**	●	**.LED**	**.20 .40 .60**	**.ST**	**.9**	**.27**	448	8	700	**.DA .PU .D1**	
								.30	458				
								.40	500				
	**10212**	**.05**	●	**.LED**	**.20 .40 .60**	**.ST**	**.9**	**.27**	774	14	700	**.DA .PU .D1**	
								.30	892				
								.40	929				
	**10212**	**.05**	●	**.LED**	**.20 .40 .60**	**.ST**	**.9**	**.27**	1519	24	700	**.DA .PU .D1**	
								.30	1814				
								.40	1871				

Reference order | ⬟ ● ■ ▼ 20212.XX.RF.XX.XX.ST.9.XX.XX

● Select finishes

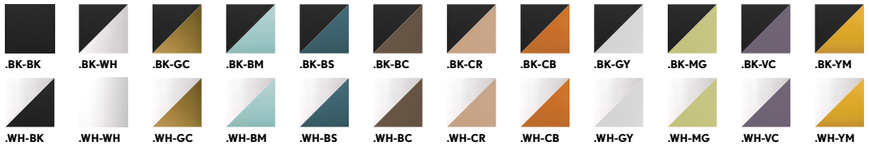

• FINISHES

EXTERNAL COLOR



INTERNAL COLOR



DIMENSIONS

⬟ View in family specifications

.03 | .05 | .10

LIGHTING OPTIONS

■ BEAM ANGLE

20º | 40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS


DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options

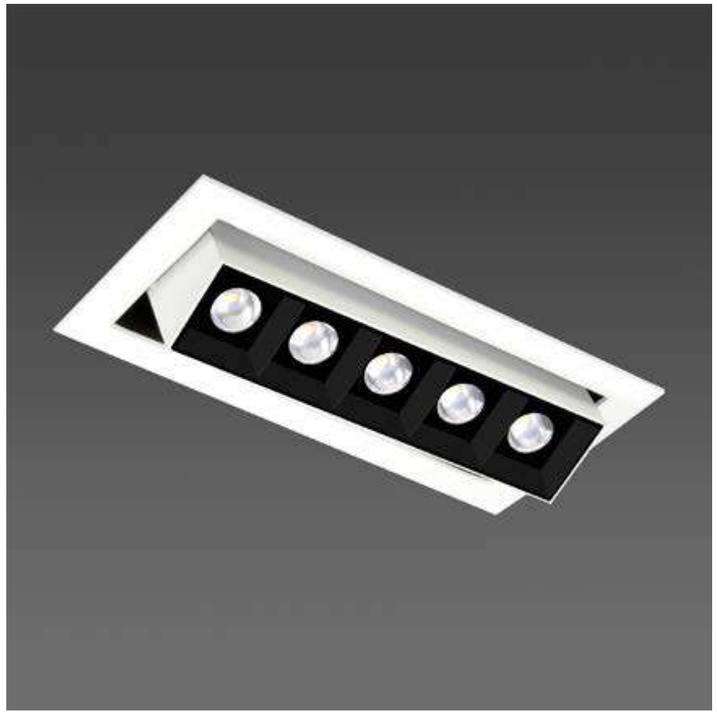

.RF
RECESSED FRAME

RECESSED FRAME

INSTALLATIONS



LENT MOTION


REF 10212.RF




.RF
RECESSED FRAME



·10212 LENT MOVE | RF
Pag. 175

PHOTOMETRY


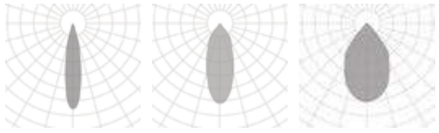


20º 40º 60º

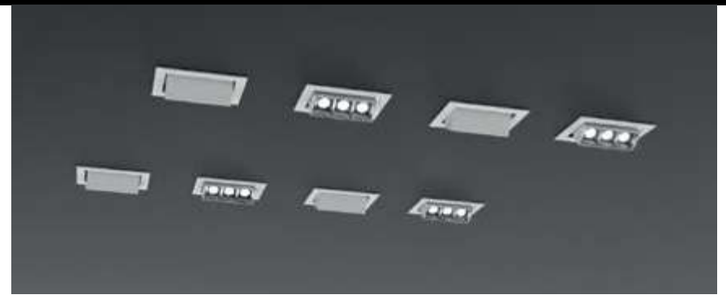

LUK	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	**20028**	**.01**	●	**.LED**	**.15 .40 .60**	**.ST**	**.9**	**.27**	787	14	350	**.DA .PU .D1**	
								.30	829				
								.40	876				
	**20028**	**.02**	●	**.LED**	**.24 .40 .60**	**.ST**	**.9**	**.27**	1373	16	500	**.DA .PU .D1**	
								.30	1445				
								.40	1522				

Reference order | 20028.XX.RF.XX.XX.ST.9.XX.XX

LUK 2	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	**20071**	**.01**	●	**.LED**	**.15 .40 .60**	**.ST**	**.9**	**.27**	1574	22	350	**.DA .PU .D1**	
								.30	1658				
								.40	1752				
	**20071**	**.02**	●	**.LED**	**.24 .40 .60**	**.ST**	**.9**	**.27**	2746	39	500	**.DA .PU .D1**	
								.30	2890				
								.40	3040				

● Select finishes



Reference order | 20071.XX.RF.XX.XX.ST.9.XX.XX

• FINISHES

COLORS

DIMENSIONS

⬟ View in family specifications

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

15º 40º 60º | 24º 40º 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options



.RF
RECESSED FRAME

INSTALLATIONS





LUK
LUK | LUK 2
REF 20028.RF | REF 20071.RF

.RF
RECESSED FRAME


·20028 LUK ·20071 LUK 2 | RF
Pag. 175

PHOTOMETRY



LUK FREIR	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	**20018**	**.01**	●	**.LED**	**.18 .40 .60**	**.ST**	**.9**	**.27**	830	9	350	**.DA .PU .D1**	
								.30	845				
								.40	895				
	**20018**	**.02**	●	**.LED**	**.24 .40 .60**	**.ST**	**.9**	**.27**	1271	16	500	**.DA .PU .D1**	
								.30	1616				
								.40	1682				

Reference order | 20018XX.RF.XX.XX.ST.9.XX.XX

LUK FREIR 2	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	20019	**.01**	●	**.LED**	**.18 .40 .60**	**.ST**	**.9**	**.27**	1660	18	350	**.DA .PU .D1**	
								.30	1690				
								.40	1790				
	**20019**	**.02**	●	**.LED**	**.24 .40 .60**	**.ST**	**.9**	**.27**	2542	32	500	**.DA .PU .D1**	
								.30	3232				
								.40	3364				

● Select finishes



Reference order | 20019.XX.RF.XX.XX.ST.9.XX.XX

• FINISHES

COLORS

DIMENSIONS

⬟ View in family specifications

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

18º 40º 60º | 24º 40º 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS


DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options

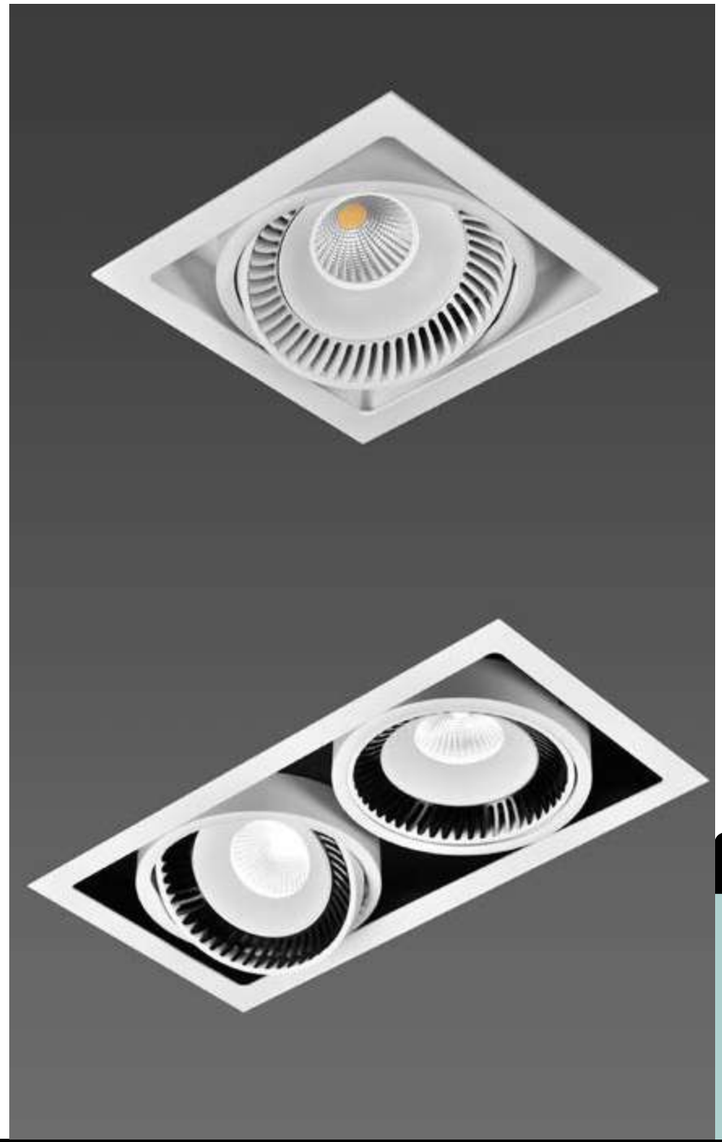

RECESSED FRAME

.RF

INSTALLATIONS



LUK
FREIR | FREIR 2

REF 20018.RF | REF 20019.RF



.SR
SURFACE

·20018 LUK FREIR ·20019 LUK FREIR 2 | SR
Pag. 175

.RF
RECESSED FRAME

·20018 LUK FREIR ·20019 LUK FREIR 2 | RF
Pag. 175

.TR
TRIMLESS

·20018 LUK FREIR ·20019 LUK FREIR 2 | TR
Pag. 175

PHOTOMETRY



BASIT	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	**8012**	**.01**	**.WH-WH .BK-BK**	**.G5**	GU5.3		-			50	-		72 x 65 mm / LED 87mm / GU 120mm
				.GU	GU10					50			
				LED	**.40 .60**	**.ST** BPM50	**.9**	**.27**	526	8	350	**.DA .PU .D1**	86 / 80 / 80
								.30	570				
								.40	711				

Reference order | 8012.XX.RF.XX.XX.XX.X.XX.XX

BASIT MOVE	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	**8013**	**.01**	●	**.G5**	GU5.3		-			50	-		87 x 69 mm / LED 87mm / GU 120mm
				.GU	GU10					50			
				LED	**.40 .60**	**.ST** BPM50	**.9**	**.27**	526	8	350	**.DA .PU .D1**	83 / 91 / 91
								.30	570				
								.40	711				
						.HI BPM300		**.27**	707	11	500		
								.30	927				
								.40	635				

Reference order | 8013.XX.RF.XX.XX.XX.X.XX.XX

● Select finishes



.WH-WH .BK-BK .GY-GY .SA-SA

• FINISHES

COLORS

DIMENSIONS

⬟ View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE

40º | 60º

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options



INSTALLATIONS



BASIT
BASIT MOVE

REF 8012.RF | 8013.RF


PHOTOMETRY




20º 40º

.RF
RECESSED FRAME

·8012 BASIT ·8013 BASIT MOVE | RF
Pag. 175


BASIT MONET	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	**20130**	**.01**	●	**.LED**	**.25** **.38** **.50**	**.ST**	**.9**	**.27**	817	13	300	**.DA** **.PU** **.D1**	
								.30	854				
								.40	1002				

Reference order | 20130.01.RF.XX.XX.ST.9.XX.XX

BASIT MONET 2	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	**20131**	**.01**	●	**.LED**	**.25** **.38** **.50**	**.ST**	**.9**	**.27**	1633	25	300	**.DA** **.PU** **.D1**	
								.30	1707				
								.40	2005				

Reference order | 20131.01.RF.XX.XX.ST.9.XX.XX

● Select finishes



BK-BK WH-WH WH-BK

• FINISHES

COLORS



DIMENSIONS

⬟ View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE

25º | 38º | 50º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS


DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options

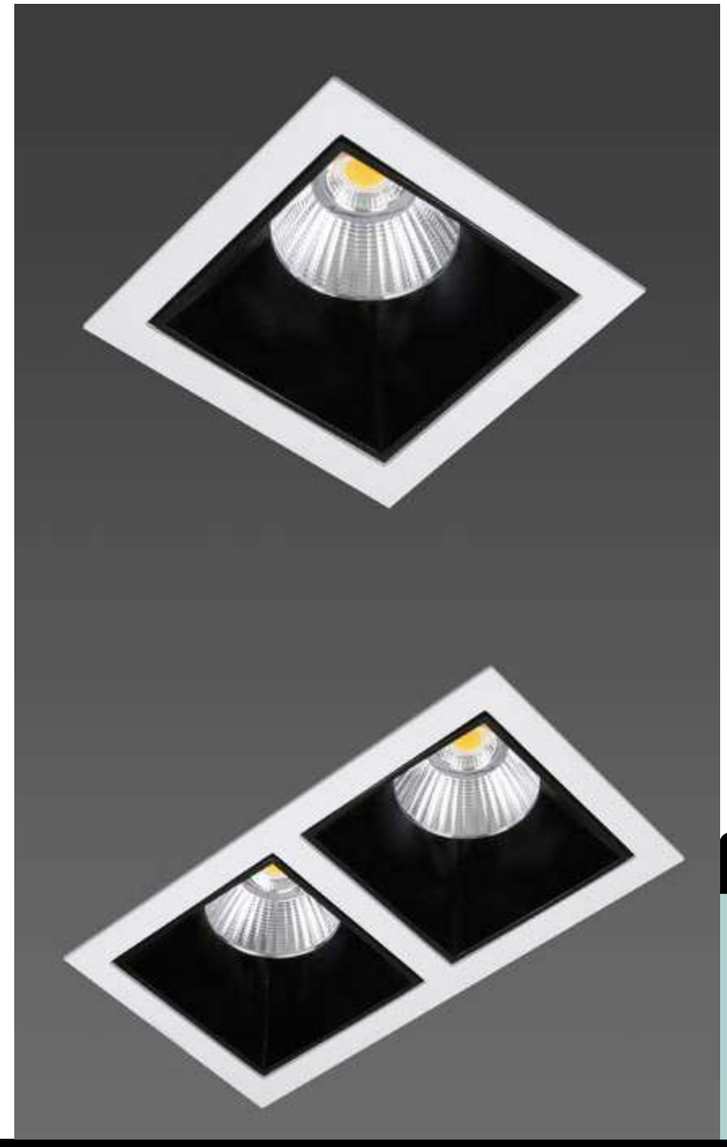

.RF

RECESSED FRAME

INSTALLATIONS



BASIT
MONET | MONET 2

REF 20130.RF | REF 20131.RF



PHOTOMETRY





25º 38º 50º

.RF
RECESSED FRAME

·20130 BASIT MONET ·20131 BASIT MONET 2 | RF
Pag. 175

BASIT LLORENS	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	**20140**	**.01**	●	**.LED**	**.24**	**.ST**	**.9**	**.27**	370	9	300	**.DA .PU .D1**	
								.30	526				
								.40	607				
	**20140**	**.02**	●	**.LED**	**.24**	**.ST**	**.9**	**.27**	370	13	300	**.DA .PU .D1**	
								.30	915				
								.40	907				

Reference order | 20140.XX.RF.XX.XX.ST.9.XX.XX

BASIT LLORENS SQ	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	**20144**	**.01**	●	**.LED**	**.24**	**.ST**	**.9**	**.27**	370	8	300	**.DA .PU .D1**	
								.30	526				
								.40	607				
	**20144**	**.02**	●	**.LED**	**.24**	**.ST**	**.9**	**.27**	730	13	300	**.DA .PU .D1**	
								.30	915				
								.40	807				

● Select finishes

WH-WH

Reference order | 20145.XX.RF.XX.XX.ST.9.XX.XX

• FINISHES

COLORS

DIMENSIONS

⬟ View in family specifications

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

24º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options



.RF

RECESSED FRAME

INSTALLATIONS



BASIT
LLORENS | LLORENS SQ


REF 20140.RF | REF 20144.RF

PHOTOMETRY

24º

.RF
RECESSED FRAME

·20140 BASIT LLORENS ·20144 BASIT LLORENS SQ | RF
Pag. 175

BASIT DERIN	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	**8010**	**.01**	●	**.G5**	GU5.3	-			50	-		107 x 107 mm / 115mm  90 / 120 / 120
				.GU	GU10				50			

Reference order | 8010.XX.RF.XX.XX.XX.X.XX.XX

• FINISHES

COLORS

DIMENSIONS

⬟ View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE

40º | 60º

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options



.RF

RECESSED FRAME

● Select finishes



BK-BK WH-WH

BASIT DERIN

REF 8010.RF




INSTALLATIONS




.RF
RECESSED FRAME

·8010 BASIT DERIN | RF
Pag. 175

PHOTOMETRY



40º 60º

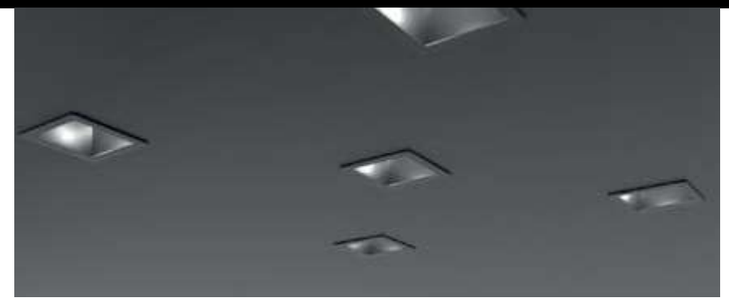

SU	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	**3149**	**.01**	●	**.LED**	**.60**	**.ST**	**.9**	**.27**	550	8	350	**.DA .PU .D1**	Ø82 mm · 80mm · 60 · Ø85
								.30	639				
								.40	644				
	**3149**	**.02**	●	**.LED**	**.30**	**.ST**	**.9**	**.27**	260	5	350	**.DA .PU .D1**	Ø57 mm · 72mm · 52 · Ø70
								.30	303				
								.40	544				

Reference order | 3149.XX.RF.XX.XX.ST.9.XX.XX

SU SQ	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	**3150**	**.01**	●	**.LED**	**.60**	**.ST**	**.9**	**.27**	513	7	350	**.DA .PU .D1**	78 x 78 mm · 80mm · 60 · Ø85
								.30	540				
								.40	570				
	**3150**	**.02**	●	**.LED**	**.32**	**.ST**	**.9**	**.27**	178	5	350	**.DA .PU .D1**	80 x 80 mm · 75mm · 55 · Ø70
								.30	187				
								.40	196				

● Select finishes



.WH-WH .BK-BK .GY-GY .SA-SA

Reference order | 3150.XX.RF.XX.XX.ST.9.XX.XX

• FINISHES

COLORS

DIMENSIONS

⬟ View in family specifications

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

30º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS


DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options

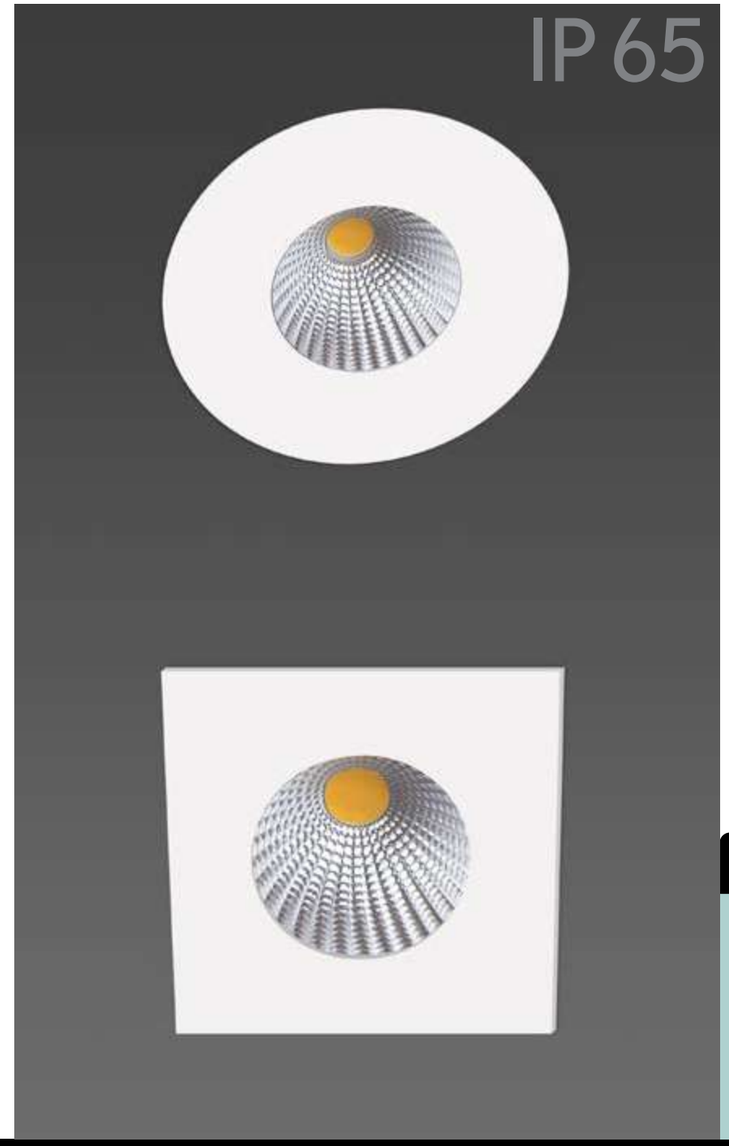

.RF

RECESSED FRAME

INSTALLATIONS



SU
SU SQ

REF 3149.RF | REF 3150.RF

PHOTOMETRY



30º 60º

.RF
RECESSED FRAME

·3149 SU ·3150 SU SQ | RF
Pag. 175

SU OTIS	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	**3234**	**.01**	●	**.LED**	**.24 .40 .60**	**.ST**	**.9**	**.27**	578	10	500	**.DA .PU .D1**	Ø73 mm / 72mm / 52 / Ø90
								.30	605				
								.40	663				
	**3234**	**.02**	●	**.LED**	**.40**	**.ST**	**.9**	**.27**	867	15	500	**.DA .PU .D1**	100 mm / 131mm / 111 / Ø115
								.30	908				
								.40	995				

Reference order | 3234.XX.RF.XX.XX.ST.9.XX.XX

• FINISHES

COLORS

□ ■

DIMENSIONS

⬟ View in family specifications

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

24º 40º 60º | 40º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options



.RF

RECESSED FRAME

● Select finishes



BK-BK WH-WH

INSTALLATIONS



SU OTIS

REF 3234.RF



.RF
RECESSED FRAME

·3234 SU OTIS | RF
Pag. 175

PHOTOMETRY



24º 40º 60º





FACE TUBULAR MOVE	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	**20205**	**.01**	●	**.LED**	**.38**	**.ST**	**.9**	**.27**	480	8	350	**.DA .PU .D1**	Ø45 mm XXXmm 122 Ø40
								.30	493				
								.40	496				

Reference order | 20205.XX.RF.XX.XX.ST.9.XX.XX

• FINISHES

COLORS

DIMENSIONS

⬟ View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE

38º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

new



.RF

RECESSED FRAME

- Select external-internal finishes



.WH-WH .BK-BK .GC-GC .CB-CB

ON DEMAND

Wireless Control Options
Special RAL Color

INSTALLATIONS



FACE
TUBULAR MOVE

REF 20205.RF



.SR
SURFACE

·20205 FACE TUBULAR MOVE | SR
Pag. 175

.RF
RECESSED FRAME




·20205 FACE TUBULAR MOVE | RF
Pag. 175

PHOTOMETRY




38º



GALANTA DEEP	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	**410001**	**.01**	●	**LED**	**.OP**	**.ST**	**.9**	**.27**	324	5	500	**.DA .PU .D1**	
								.30	345				
								.40	417				
	**410001**	**.02**	●	**LED**	**.OP**	**.ST**	**.9**	**.27**	XXX	8	500	**.DA .PU .D1**	
								.30	XXX				
								.40	XXX				
	**410001**	**.03**	●	**LED**	**.OP**	**.ST**	**.9**	**.27**	768	12	500	**.DA .PU .D1**	
								.30	694				
								.40	641				

Reference order | ⬟ ● ■ ▼ 410001.XX.RF.XX.XX.ST.9.XX.XX

● Select finishes

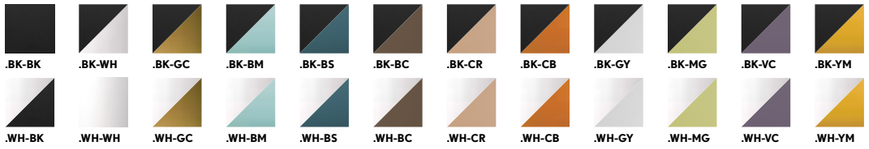

• FINISHES

EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

■ DIFFUSER

OPAL

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options

new



.RF
RECESSED FRAME

INSTALLATIONS



GALANTA DEEP

REF 410001.RF

PHOTOMETRY



OPAL



.RF
RECESSED FRAME

·410001 GALANTA DEEP | RF
Pag. 175

CASTEJON	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	**20173**	**.01**	●	**.G5**	GU5.3		-			50	-		Ø83 mm / LED XXmm / GU XXmm / 150 / Ø92
				.GU	GU10					50			
				LED	**.31** **.41**	.ST BPM50	.9	.27	480	7	350	.DA .PU .D1	
								.30	514				
								.40	565				

Reference order | 20173.XX.RF.XX.XX.XX.X.XX.XX

CASTEJON SQ	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	**20174**	**.01**	●	**.G5**	GU5.3		-			50	-		83 x 83 mm / LED XXmm / GU XXmm / 150 / 92 / 92
				.GU	GU10					50			
				LED	**.40** **.60**	.ST BPM50	.9	.27	480	7	350	.DA .PU .D1	
								.30	514				
								.40	565				

Reference order | 20174.XX.RF.XX.XX.XX.X.XX.XX

● Select finishes

BK-BK WH-WH

• FINISHES

COLORS

DIMENSIONS

⬟ View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE

40º | 60º | GU

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options



.RF
RECESSED FRAME

RECESSED FRAME

INSTALLATIONS

ALUMINIUM PC | 0° | 0° | CRI ≥90 | IK06 | IP20 IP43 | L80B10 50000H | DIM OPTIONAL | | REMOTE | INDOOR | | | 220-240 V 50-60 Hz | CE

CASTEJON
CASTEJON SQ

REF 20173.RF | REF 20174.RF


PHOTOMETRY



40º 60º

.RF
RECESSED FRAME

·20173 CASTEJON ·20174 CASTEJON SQ | RF
Pag. 175

ROY	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	**20154**	**.01**	●	**.LED**	**.15** **.25** **.38** **.60**	**.ST**	**.9**	**.27**	779	10	250	**.DA** **.PU** **.D1**	
								.30	820				
								.40	860				

Reference order | 20154.XX.RF.XX.XX.ST.9.XX.XX

● Select finishes



BK-BK WH-WH

• FINISHES

COLORS



DIMENSIONS

⬟ View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE

15º | 25º | 38º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options





.RF

RECESSED FRAME

INSTALLATIONS



ROY

REF 20154.RF

.RF
RECESSED FRAME

·20154 ROY | RF
Pag. 175

PHOTOMETRY



15º 38º 60º

VISUAL INDEX

ALABAMA

ALABAMA
10158 PAG. XXX

OHIO



OHIO
10188 PAG. XXX

OHIO SQ
10204 PAG. XXX

ALTAIR

ALTAIR
10172 PAG. XXX

ALBERTA

ALBERTA
10176 PAG. XXX

FLORIDA



FLORIDA
10190 PAG. XXX



FLORIDA SQ
10191 PAG. XXX

ALBA

ALBA PLUS
10178 PAG. XXX

ALBA
10160 PAG. XXX

ALBA MINI
10211 PAG. XXX



ALBA PLUS ASIMETRIC
210008 PAG. XXX



ALBA ASIMETRIC
210009 PAG. XXX

WING



WING
10200 PAG. XXX

ALARIK



ALARIK
10225 PAG. XXX



ALARIK SLIM
20224 PAG. XXX



ALARIK MINI
210006 PAG. XXX

MODULIGHT



MODULIGHT
10210 PAG. XXX

MARTORELL



MARTORELL
20115 PAG. XXX



MARTORELL TARREGA
20117 PAG. XXX



MARTORELL TARREGA SQ
20118 PAG. XXX

LUK



LUK FREIR
20018 PAG. XXX



LUK FREIR 2
20019 PAG. XXX

CUBE



CUBE
8201 PAG. XXX



CUBE SQ2
8202 PAG. XXX



CUBE SQ3
8203 PAG. XXX

TRIMLESS

LENT



LENT MODULAR
10216 PAG. XXX

SASSY



SASSY
410002 PAG. XXX

SASSY SQ
410003 PAG. XXX

ZENIT



ZENIT
10123 PAG. XXX



ZENIT SQ
30002 PAG. XXX

ZENIT DEEP
30004 PAG. XXX

ZENIT DEEP TWINS
30005 PAG. XXX



ZENIT MOVE
10125 PAG. XXX



ZENIT MOVE SQ
30003 PAG. XXX



ZENIT ORTO
10126 PAG. XXX



ZENIT SIDEREA
10050 PAG. XXX



ZENIT MOVE
10122 PAG. XXX



ZENIT MOVE SQ
10121 PAG. XXX

CENTAURO



CENTAURO
10109 PAG. XXX

VEGA

VEGA ADHARA
10016 PAG. XXX



VEGA ADHARA TWINS
10066 PAG. XXX



VEGA
10028 PAG. XXX



VEGA TWINS
10070 PAG. XXX

VEGA ZETA
10001 PAG. XXX



VEGA ZETA SQ
10019 PAG. XXX



VEGA ZETA SQ TWINS
10072 PAG. XXX

VITA



VITA
30007 PAG. XXX

IBIZA



IBIZA FLAT
10500 PAG. XXX



IBIZA DEEP WAVE
10501 PAG. XXX



IBIZA DEEP TILT
10502 PAG. XXX



IBIZA EDGE
10503 PAG. XXX



IBIZA WASHER
10504 PAG. XXX



IBIZA DEEP STRAIGHT
10505 PAG. XXX

MENORCA



MENORCA FLAT
10550 PAG. XXX



MENORCA DEEP WAVE
10551 PAG. XXX



MENORCA DEEP TILT
10552 PAG. XXX



MENORCA EDGE
10553 PAG. XXX



MENORCA WASHER
10554 PAG. XXX



MENORCA DEEP STRAIGHT
10555 PAG. XXX

VISUAL INDEX

SUNSET



ALABAMA

10124 PAG. XXX

VOLCANO

VOLCANO

10062 PAG. XXX

VOLCANO DEEP

10063 PAG. XXX

ESPIGA



ESPIGA

10086 PAG. XXX



ESPIGA SQ

10083 PAG. XXX

ESPIGA SIRIO

10077 PAG. XXX

ESPIGA SIRIO TWINS

30000 PAG. XXX



ESPIGA ORIONIS

10080 PAG. XXX



ESPIGA ORIONIS TWINS

30001 PAG. XXX

TRIMLESS





FINISHES

● COLORS

DIMENSIONS

⬟ DIAMETERS mm. | HEIGHT 125 mm

350 | 450 | 650 | 950 | 1250

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN

LUMINAIRE INCLUDES

Trimless mounting kit



ON DEMAND

Special RAL Color
Special Color Temperature
Number of switches
Emergency Lighting*
CRI 80
Motion Detection
RGB
Wireless Control Options (Casambi)

* Accesories are delivered separately (not installed in luminaire).

.TR

TRIMLESS

INSTALLATIONS



ALABAMA

REF 10158.TR



.PN
PENDANT

·10158 ALABAMA | PN
Pag. 175

.SR
SURFACE


·10158 ALABAMA | SR
Pag. 175

.RF
RECESSED FRAME






·10158 ALABAMA | RF
Pag. 175

.TR
TRIMLESS

·10158 ALABAMA | TR
Pag. 175





ALABAMA	REF.	DIMEN-SION ⬟	FINISH	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10158	.35	●	.OP .MP	.ST	.9	.27	-	18	500	.DA .PU .D1	
							.30	2385				
							.40	2475				
						.8	.TW	-	-	-	.DA	
					.HI	.9	.27	-	35	500	.DA .PU .D1	
							.30	4767				
							.40	4956				
	10158	.45	●	.OP .MP	.ST	.9	.27	4590	35	500	.DA .PU .D1	
							.30	4770				
							.40	4950				
						.8	.TW	11400 - 11820	76	700	.DA	
					.HI	.9	.27	9180	71	500	.DA .PU .D1	
							.30	9534				
							.40	9912				
	10158	.65	●	.OP .MP	.ST	.9	.27	9180	71	500	.DA .PU .D1	
							.30	9540				
							.40	9900				
						.8	.TW	22800-23640	152	700	.DA	
					.HI	.9	.27	18360	142	500	.DA .PU .D1	
							.30	19068				
							.40	19824				
	10158	.95	●	.OP .MP	.ST	.9	.27	16830	130	500	.DA .PU .D1	
							.30	17490				
							.40	18150				
						.8	.TW	41800-43340	279	700	.DA	
					.HI	.9	.27	33660	260	500	.DA .PU .D1	
							.30	34958				
							.40	36344				
	10158	.125	●	.OP .MP	.ST	.9	.27	27540	212	500	.DA .PU .D1	
							.30	28620				
							.40	29700				
						.8	.TW	68400-70920	457	700	.DA	
					.HI	.9	.27	55080	425	500	.DA .PU .D1	
							.30	57204				
							.40	59472				

Reference order | 10158.XX.TR.XX.XX.XX.X.XX.XX



Seamlessly tunable

Adapt to individual needs with the ability to control the color temperature output and enhance the experience.

Perfectamente ajustable


Adaptable a cada necesidad con la capacidad de controlar la salida de temperatura de color y mejorar la experiencia.




ALABAMA

REF 10158.TR

● Select finishes




PHOTOMETRY



OPAL MICROPRISMATIC

INCLUDED



TR mounting KIT

PROFILE





FINISHES

● EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ DIAMETERS mm. | HEIGHT 114 mm

350 | 450 | 650 | 950 | 1250

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN

LUMINAIRE INCLUDES

Trimless mounting kit





ON DEMAND

Special RAL Color
Number of switches
Emergency Lighting*
Motion Detection
Wireless Control Options (Casambi)

* Accesories are delivered separately (not installed in luminaire).

.TR

TRIMLESS

INSTALLATIONS



FLORIDA

REF 10190.TR



.PN
PENDANT

·10190 FLORIDA | PN
Pag. 175

.SR
SURFACE

·10190 FLORIDA | SR
Pag. 175

.RF
RECESSED FRAME






·10190 FLORIDA | RF
Pag. 175

.TR
TRIMLESS


·10190 FLORIDA | TR
Pag. 175





FLORIDA	REF.	DIMEN-SION ⬟	FINISH	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	**10190**	**.35**	●	**.OP .MP**	**.ST**	**.9**	**.27**	2706	27	700	**.DA .PU .D1**	
							.30	2940				
							.40	3000				
	**10190**	**.45**	●	**.OP .MP**	**.ST**	**.9**	**.27**	4510	45	700	**.DA .PU .D1**	
							.30	4900				
							.40	5000				
	**10190**	**.65**	●	**.OP .MP**	**.ST**	**.9**	**.27**	10824	109	700	**.DA .PU .D1**	
							.30	11760				
							.40	12000				
	**10190**	**.95**	●	**.OP .MP**	**.ST**	**.9**	**.27**	19844	200	700	**.DA .PU .D1**	
							.30	21560				
							.40	22000				
	**10190**	**.125**	●	**.OP .MP**	**.ST**	**.9**	**.27**	31570	318	700	**.DA .PU .D1**	
							.30	34300				
							.40	35000				


Reference order | 10190.XX.TR.XX.XX.ST.9.XX.XX

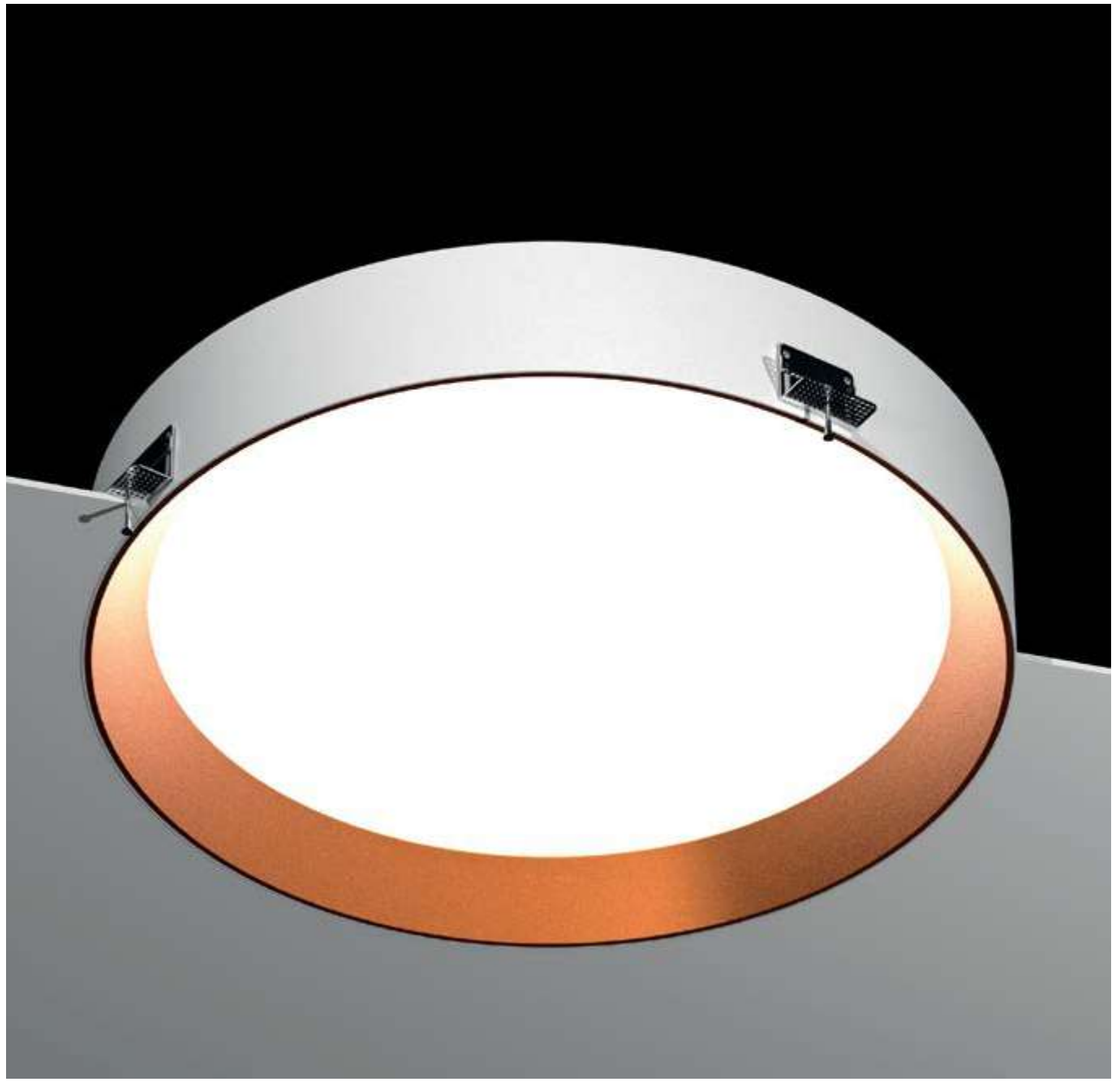

.TR

TRIMLESS

- Select finishes






FLORIDA


REF 10190.TR

PHOTOMETRY




OPAL MICROPRISMATIC

INCLUDED



TR mounting KIT

PROFILE





FINISHES

● EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ SIZES mm. | HEIGHT 114 mm

350 | 450 | 650 | 950 | 1250

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS


DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN

LUMINAIRE INCLUDES

Trimless mounting kit

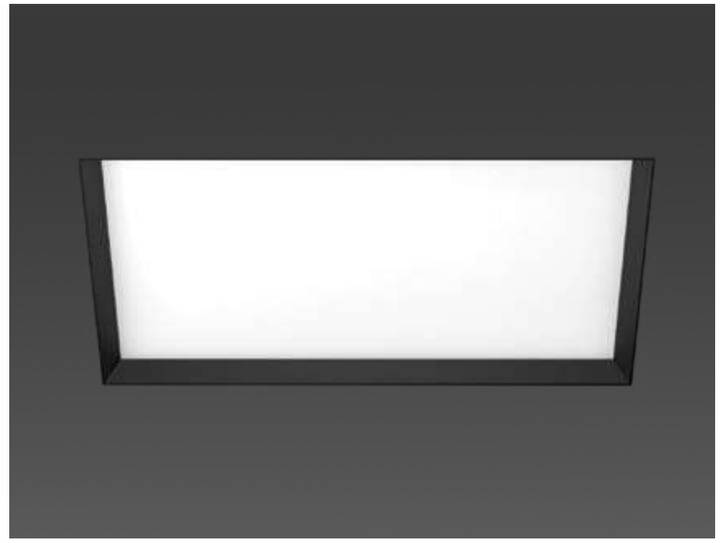



ON DEMAND

Special RAL Color
Number of switches
Emergency Lighting*
Motion Detection
Wireless Control Options (Casambi)

* Accesories are delivered separately (not installed in luminaire).

FLORIDA SQ

REF 10191.TR

INSTALLATIONS





.PN
PENDANT

·10191 FLORIDA SQ | PN
Pag. 175

.SR
SURFACE

·10191 FLORIDA SQ | SR
Pag. 175

.RF
RECESSED FRAME







·10191 FLORIDA SQ | RF
Pag. 175

.TR
TRIMLESS

·10191 FLORIDA SQ | TR
Pag. 175





FLORIDA SQ	REF.	DIMEN-SION ⬟	FINISH	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10191	.35	●	.OP .MP	.ST	.9	.27	2706	27	700	.DA .PU .D1	
							.30	2940				
							.40	3000				
	10191	.45	●	.OP .MP	.ST	.9	.27	5412	55	700	.DA .PU .D1	
							.30	5880				
							.40	6000				
	10191	.65	●	.OP .MP	.ST	.9	.27	10824	109	700	.DA .PU .D1	
							.30	11760				
							.40	12000				
	10191	.95	●	.OP .MP	.ST	.9	.27	21648	218	700	.DA .PU .D1	
							.30	23520				
							.40	24000				
	10191	.125	●	.OP .MP	.ST	.9	.27	36080	364	700	.DA .PU .D1	
							.30	39200				
							.40	40000				

Reference order | 10191.XX.TR.XX.XX.ST.9.XX.XX



.TR

TRIMLESS

- Select finishes






FLORIDA SQ

REF 10191.TR

PHOTOMETRY




OPAL MICROPRISMATIC

INCLUDED



TR mounting KIT

PROFILE





FINISHES

● COLORS

□

DIMENSIONS

⬟ DIAMETERS mm. | HEIGHT 125 mm

650 | 950 | 1250

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS


DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN

LUMINAIRE INCLUDES

Trimless mounting kit

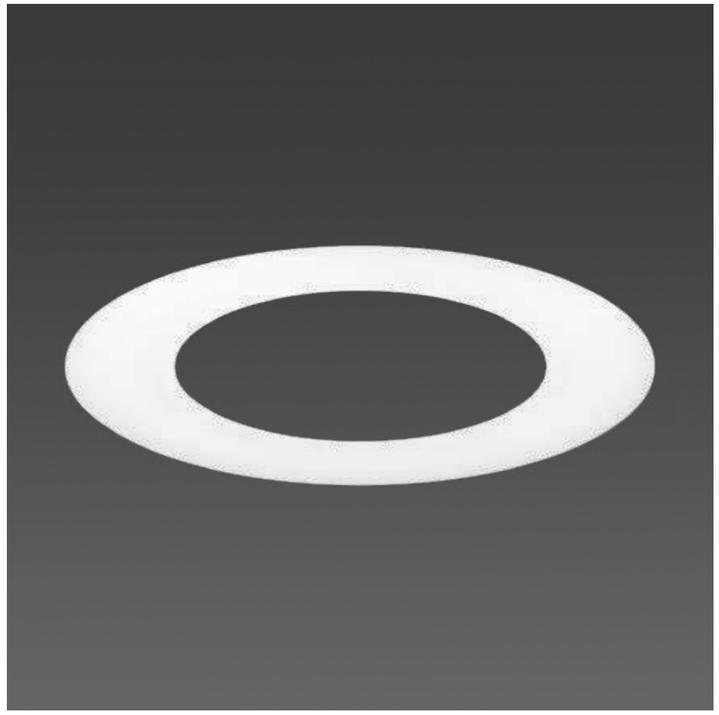

ON DEMAND

Special RAL Color
Special Color Temperature
Number of switches
Emergency Lighting*
CRI 80
Motion Detection
RGB
Wireless Control Options (Casambi)
Other Dimensions

* Accesories are delivered separately (not installed in luminaire).

.TR


TRIMLESS

ALBERTA

REF 10176.TR

ALUMINIUM PC | 0° | 0° | CRI ≥90 | IK06 | IP20 IP43 | L70 50000H | DIM OPTIONAL | INTEGRATED | INDOOR | 220-240 V 50-60 Hz | CE

INSTALLATIONS

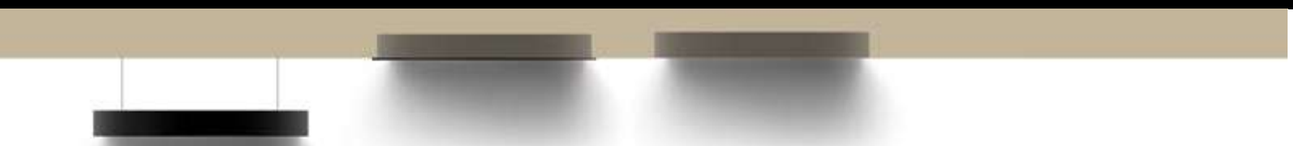

.PN
PENDANT

·10176 ALBERTA | PN
Pag. 175




.RF
RECESSED FRAME

·10176 ALBERTA | RF
Pag. 175

.TR
TRIMLESS

·10176 ALBERTA | TR
Pag. 175



ALBERTA	REF.	DIMEN-SION ⬟	FINISH	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10176	.65	●	.OP .MP	.ST	.9	.27	3825	30	500	.DA .PU .D1	
							.30	3975				
							.40	4125				
						.8	.TW *1	9500 - 9850	64	700	.DA	
					.HI	.9	.27	7650	59	500	.DA .PU .D1	
							.30	7945				
							.40	8260				
	10176	.95	●	.OP .MP	.ST	.9	.27	6120	47	500	.DA .PU .D1	
							.30	6360				
							.40	6600				
						.8	.TW *1	15200 - 15760	102	700	.DA	
					.HI	.9	.27	12240	94	500	.DA .PU .D1	
							.30	12712				
							.40	13216				
	10176	.125	●	.OP .MP	.ST	.9	.27	7650	59	500	.DA .PU .D1	
							.30	7950				
							.40	8250				
						.8	.TW *1	19000-19700	127	700	.DA	
					.HI	.9	.27	15300	118	500	.DA .PU .D1	
							.30	15890				
							.40	16520				

Reference order | 10176.XX.TR.XX.XX.XX.X.XX.XX



- Select finishes



.WH-WH



ALBERTA

REF 10176.TR

PHOTOMETRY



OPAL



MICROPRISMATIC

INCLUDED



TR mounting KIT

PROFILE



*1 Tunable White (.TW) values correspond to 2700K and 6500K - .TW is only available for DALI dimmable (.DA), CRI 80 (.8) 700mA. *Los valores del blanco dinámico (.TW) corresponden a 2700K y 6500K. -.TW solo está disponible con protocolo DALI (.DA), CRI 80 (.8) 700mA.*



FINISHES

● COLORS

□

DIMENSIONS

⬟ SIZES mm. | HEIGHT 125 mm

450 | 650 | 950 | 1250

300 x 650 | 300 x 950 | 300 x 1250

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS


DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN

LUMINAIRE INCLUDES

Trimless mounting kit

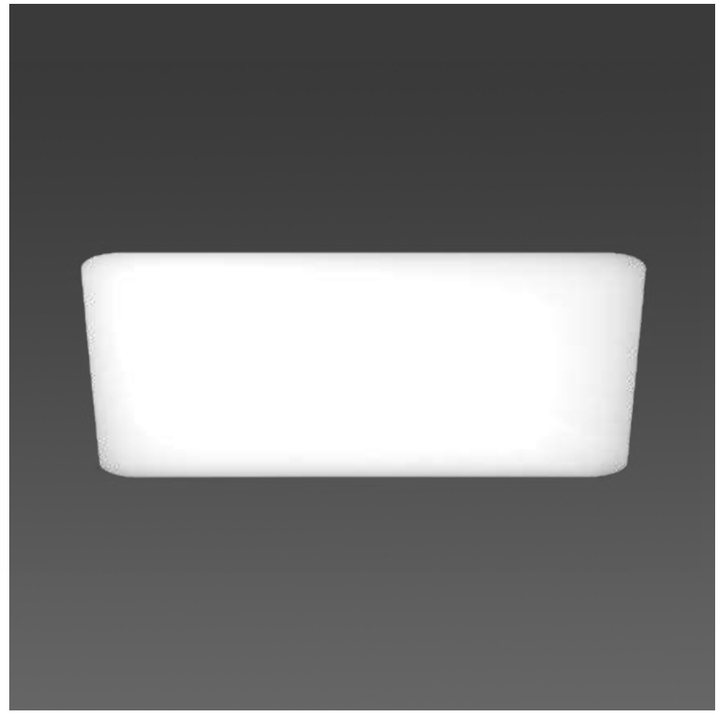

ON DEMAND

Special RAL Color
Special Color Temperature
Number of switches
Emergency Lighting*
CRI 80
Motion Detection
RGB
Wireless Control Options (Casambi)

* Accesories are delivered separately (not installed in luminaire).

.TR


TRIMLESS

INSTALLATIONS



ALTAIR

REF 10172.TR

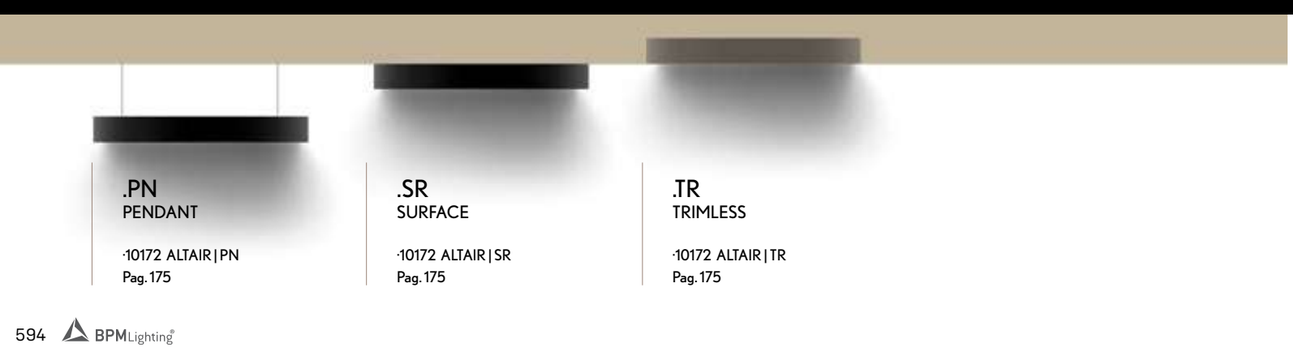

.PN
PENDANT

·10172 ALTAIR | PN
Pag. 175

.SR
SURFACE





·10172 ALTAIR | SR
Pag. 175

.TR
TRIMLESS

·10172 ALTAIR | TR
Pag. 175





ALTAIR	REF.	DIMEN-SION ⬟	FINISH	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10172	.45	●	.OP .MP	.ST	.9	.27	3060	24	500	.DA .PU .D1	
							.30	3180				
							.40	3300				
						.8	.TW	7600 - 7880	51	700	.DA	
					.HI	.9	.27	6120	47	500	.DA .PU .D1	
							.30	6356				
							.40	6608				
	10172	.65	●	.OP .MP	.ST	.9	.27	6120	47	500	.DA .PU .D1	
							.30	6360				
							.40	6600				
						.8	.TW	15200 - 15760	102	700	.DA	
					.HI	.9	.27	12240	94	500	.DA .PU .D1	
							.30	12712				
							.40	13216				
	10172	.95	●	.OP .MP	.ST	.9	.27	11475	89	500	.DA .PU .D1	
							.30	11925				
							.40	12375				
						.8	.TW	28500 - 29550	191	700	.DA	
					.HI	.9	.27	22950	177	500	.DA .PU .D1	
							.30	23835				
							.40	24780				
	10172	.125	●	.OP .MP	.ST	.9	.27	18360	142	500	.DA .PU .D1	
							.30	19080				
							.40	19800				
						.8	.TW	45600 - 47280	305	700	.DA	
					.HI	.9	.27	36720	283	500	.DA .PU .D1	
							.30	38136				
							.40	39648				

Reference order | 10172.XX.TR.XX.XX.XX.X.XX.XX



.TR

TRIMLESS

- Select finishes




.WH-WH

ALUMINIUM PC · 0° · 0° · CRI ≥90 · IK06 · IP20 IP43 · LIFE 50000H · DIM OPTIONAL · INTEGRATED · INDOOR · 220-240 V 50-60 Hz · CE

ALTAIR

REF 10172.TR

PHOTOMETRY




OPAL MICROPRISMATIC

INCLUDED



TR mounting KIT

PROFILE





FINISHES

● COLORS

DIMENSIONS

⬟ DIAMETERS mm. | HEIGHT 160 mm

250 | 350 | 450 | 650 | 950 | 1250

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN

LUMINAIRE INCLUDES

Trimless mounting kit



ON DEMAND

Special Color Temperature
Number of switches
Emergency Lighting*
Motion Detection
Wireless Control Options (Casambi)

* Delivered separately
(not installed in luminaire).

.TR


TRIMLESS

INSTALLATIONS



OHIO

REF 10188.TR

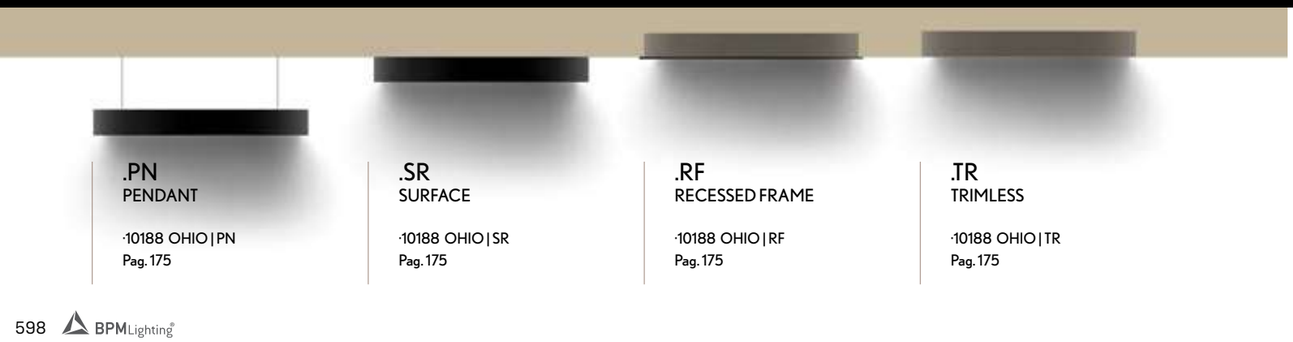

.PN
PENDANT

·10188 OHIO | PN
Pag. 175

.SR
SURFACE


·10188 OHIO | SR
Pag. 175

.RF
RECESSED FRAME






·10188 OHIO | RF
Pag. 175

.TR
TRIMLESS

·10188 OHIO | TR
Pag. 175





OHIO	REF.	DIMEN-SION ⬟	FINISH	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10188	.25	●	.OP .MP	.ST	.9	.27	-	12	700	.DA .PU .D1	
							.30	1590				
							.40	1650				
	10188	.35	●	.OP .MP	.ST	.9	.27	-	18	700	.DA .PU .D1	
							.30	2385				
							.40	2475				
	10188	.45	●	.OP .MP	.ST	.9	.27	4590	35	700	.DA .PU .D1	
							.30	4770				
							.40	4950				
	10188	.65	●	.OP .MP	.ST	.9	.27	9180	71	700	.DA .PU .D1	
							.30	9540				
							.40	9900				
	10188	.95	●	.OP .MP	.ST	.9	.27	16830	130	700	.DA .PU .D1	
							.30	17490				
							.40	18150				
	10188	.125	●	.OP .MP	.ST	.9	.27	27540	212	700	.DA .PU .D1	
							.30	28620				
							.40	29700				

Reference order | 10188.XX.TR.XX.XX.ST.9.XX.XX

● Select finishes








OHIO


REF 10188.TR

PHOTOMETRY



OPAL MICROPRISMATIC

INCLUDED



TR mounting KIT

PROFILE





FINISHES

● COLORS

DIMENSIONS

⬟ SIZES mm. | HEIGHT 160 mm

350 | 450 | 650 | 950 | 1250

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS


DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN

LUMINAIRE INCLUDES

Trimless mounting kit

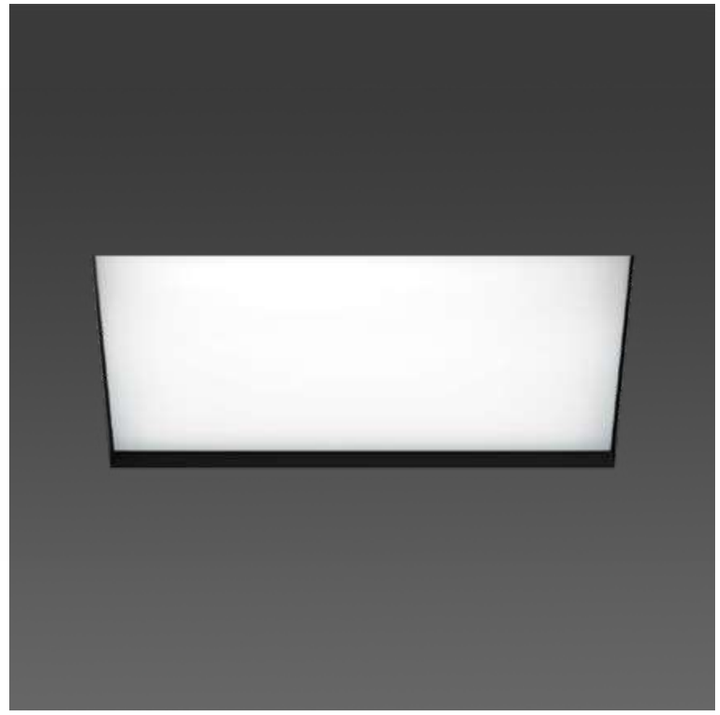

ON DEMAND

Special Color Temperature
Number of switches
Emergency Lighting*
Motion Detection
Wireless Control Options (Casambi)

* Delivered separately
(not installed in luminaire).

.TR

TRIMLESS

INSTALLATIONS



OHIO
SQ

REF 10204.TR



.RF
RECESSED FRAME







·10204 OHIO SQ | RF
Pag. 175

.TR
TRIMLESS


·10204 OHIO SQ | TR
Pag. 175





OHIO SQ	REF.	DIMEN-SION ⬟	FINISH	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10204	.35	●	.OP .MP	.ST	.9	.27	2295	18	500	.DA .PU .D1	
							.30	2385				
							.40	2475				
	10204	.45	●	.OP .MP	.ST	.9	.27	4590	35	500	.DA .PU .D1	
							.30	4770				
							.40	4950				
	10204	.65	●	.OP .MP	.ST	.9	.27	9180	71	500	.DA .PU .D1	
							.30	9540				
							.40	9900				
	10204	.95	●	.OP .MP	.ST	.9	.27	18360	142	500	.DA .PU .D1	
							.30	19080				
							.40	19800				
	10204	.125	●	.OP .MP	.ST	.9	.27	30600	236	500	.DA .PU .D1	
							.30	31800				
							.40	33000				

Reference order | 10204.XX.TR.XX.XX.ST.9.XX.XX

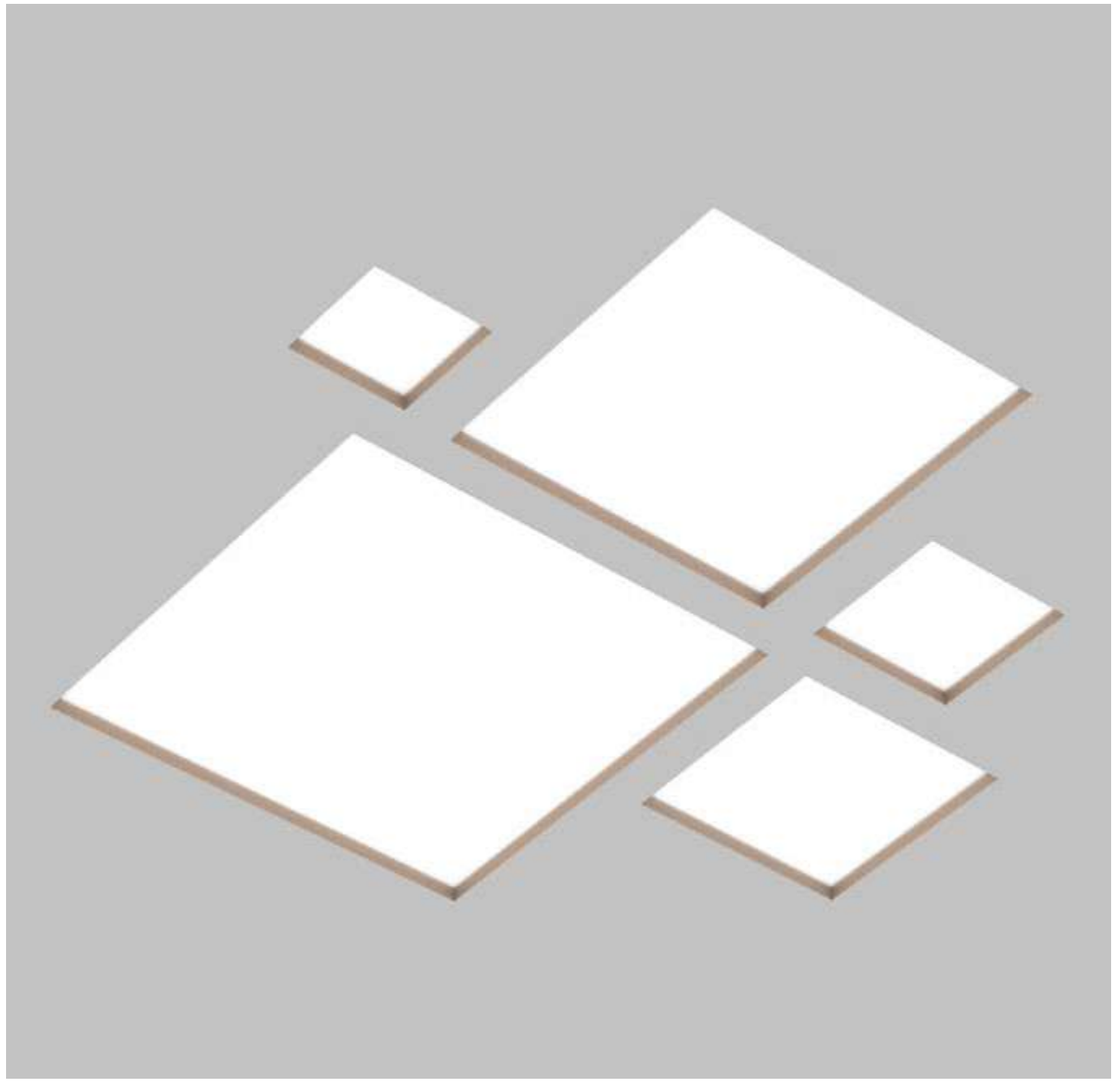

.TR

TRIMLESS

● Select finishes






OHIO SQ

REF 10204.TR

PHOTOMETRY



OPAL MICROPRISMATIC

INCLUDED



TR mounting KIT

PROFILE



LINES

TRIMLESS

A blank canvas

There are no limits Don't worry about lighting. Imagine the end result and use our Line profiles to make it happen. Few collections can be combined in so many ways to create so many looks and fulfil so many functions. It's the joker in the pack for designing unique spaces.

Un lienzo en blanco

Vía libre. No pensar en las luminarias. Pensar en el resultado final, y nuestra perfilería lineal se adaptará a ello. Pocas colecciones se prestan a tantas combinaciones, tanto estéticas como de funcionamiento, por ello es un comodín a la hora de diseñar espacios que requieren de un plus de singularidad.



FINISHES

● COLORS

DIMENSIONS

⬟ LENGTHS mm.

863 | 1144 | 1425 | 1706 | 1987 | 2268

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS


DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

Trimless mounting kit

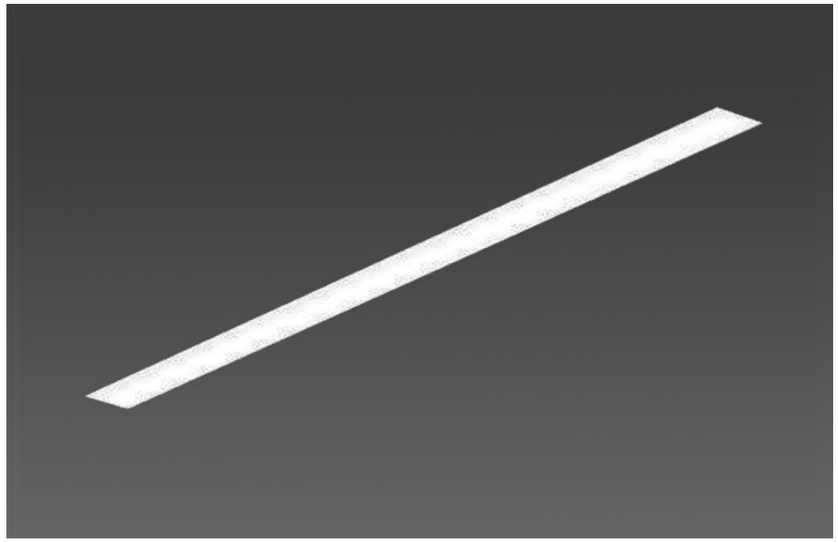



ON DEMAND

Emergency Lighting*
Motion Detection
Well-Certified LED Boards
Taylor your own design
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

INSTALLATIONS



ALBA PLUS

REF 10178.TR



.PN
PENDANT

·10178 ALBA PLUS | PN
Pag. 175

.TK
TRACK

·10178 ALBA PLUS | TK
Pag. 175

.SR
SURFACE


·10178 ALBA PLUS | SR
Pag. 175

.RF
RECESSED FRAME

·10178 ALBA PLUS | RF
Pag. 175

.TR
TRIMLESS

·10178 ALBA PLUS | TR
Pag. 175





REF.	DIMENSION ⬟	MM	FINISH ●	DIFFUSER ■	POWER	CRI	DOWNLIGHT | LUMEN .27	.30	.40	.TW*2	WATT K	TW	DIMM ▼
10178	.03	863	●	.OP .MP	.ST	.9	2295	2385	2475	5700-8520	18	38	.DA .PU .D1
	.04	1144					3060	3180	3300	7600-11360	24	51	
	.05	1425					3825	3975	4125	9500-14200	30	64	
	.06	1706					4590	4770	4950	11400-17040	35	76	
	.07	1987					5355	5565	5775	13300-19880	41	89	
	.08	2268					6120	6360	6600	15200-22720	47	102	

REF.	DIMENSION ⬟	MM	FINISH ●	DIFFUSER ■	POWER	CRI	DOWNLIGHT | LUMEN .27	.30	.40	WATT	DIMM ▼
10178	.03	863	●	.OP .MP	.HI	.9	4590	4767	4956	35	.DA .PU .D1
	.04	1144					6120	6356	6608	47	
	.05	1425					7650	7945	8260	59	
	.06	1706					9180	9534	9912	71	
	.07	1987					10710	11123	11564	83	
	.08	2268					12240	12712	13216	94	

Reference order | 10178.XX.TR.XX.XX.XX.X.XX.XX

COMPONENTS

COVERT KIT	REF.	FINISH ●
	TF01	●

Reference order | TF01.TR.XX

REDUGER	REF.	POWER
	ACC.RG	.ST .HI

Reference order | ACC.RG.XX

JOINTS

LINEAR JOINT	ANGLE JOINT	T-JOINT	CROSS JOINT	ROOF-WALL JOINT	FINISH
					●
UR01 40 x75mm	**UL01** 130x130mm	**UT01** 223x151mm	**UC01** 210x210mm	**UV01** 130x130mm	

Reference order | XX01.TR.XX

● Select finish





ALBA PLUS


REF 10178.TR

PHOTOMETRY




OPAL MICROPRISMATIC

INCLUDED



TR INSTALATION KIT

PROFILE



*1 Tunable White (.TW) values correspond to 2700K and 6500K - .TW is only available for DALI dimmable (.DA), CRI 80 (.8) 700mA. *Los valores del blanco dinámico (.TW) corresponden a 2700K y 6500K. -.TW solo está disponible con protocolo DALI (.DA), CRI 80 (.8) 700mA.*
*2 Down light (direct light) works at 500mA. *La luz directa trabaja a 500mA.*



FINISHES

● COLORS

DIMENSIONS

⬟ LENGTHS mm.

863 | 1144 | 1425 | 1706 | 1987 | 2268

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS


DALI | 1.10 | PUSH


▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

Trimless mounting kit

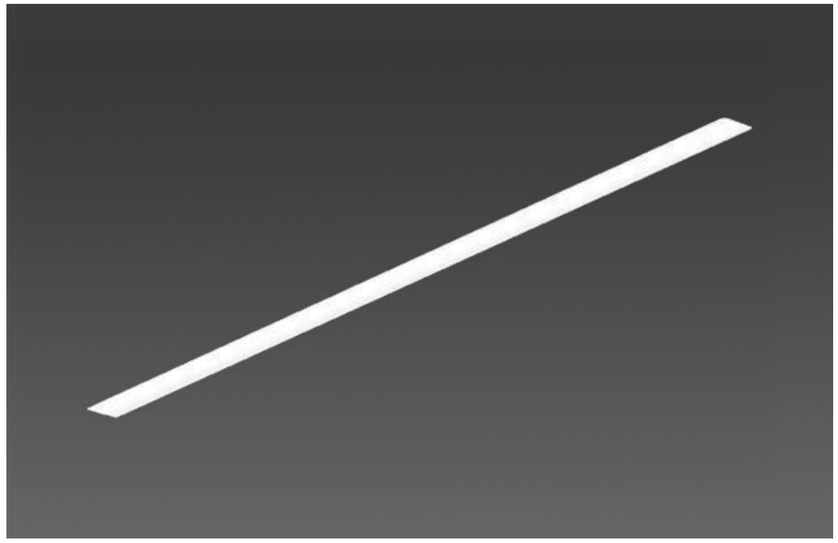



ON DEMAND

Emergency Lighting*
Motion Detection
Well-Certified LED Boards
Taylor your own design
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

INSTALLATIONS



ALBA

REF 10160.TR



.PN
PENDANT
·10160 ALBA | PN
Pag. 175


.WS
WALL SURFACE
·10160 ALBA | WS
Pag. 175

.TK
TRACK
·10160 ALBA | TK
Pag. 175

.SR
SURFACE
·10160 ALBA | SR
Pag. 175

.RF
RECESSED FRAME
·10160 ALBA | RF
Pag. 175

.TR
TRIMLESS
·10160 ALBA | TR
Pag. 175





REF.	DIMENSION ⬟	MM	FINISH ●	DIFFUSER ■	POWER	CRI	DOWNLIGHT | LUMEN .27	.30	.40	.TW*2	WATT K	TW	DIMM ▼
10160	.03	863	●	.OP .MP	.ST	.9	2295	2385	2475	5700-8520	18	38	.DA .PU .D1
	.04	1144					3060	3180	3300	7600-11360	24	51	
	.05	1425					3825	3975	4125	9500-14200	30	64	
	.06	1706					4590	4770	4950	11400-17040	35	76	
	.07	1987					5355	5565	5775	13300-19880	41	89	
	.08	2268					6120	6360	6600	15200-22720	47	102	

REF.	DIMENSION ⬟	MM	FINISH ●	DIFFUSER ■	POWER	CRI	DOWNLIGHT | LUMEN .27	.30	.40	WATT	DIMM ▼
10160	.03	863	●	.OP .MP	.HI	.9	4590	4767	4956	35	.DA .PU .D1
	.04	1144					6120	6356	6608	47	
	.05	1425					7650	7945	8260	59	
	.06	1706					9180	9534	9912	71	
	.07	1987					10710	11123	11564	83	
	.08	2268					12240	12712	13216	94	

Reference order | 10160.XX.TR.XX.XX.XX.X.XX.XX

COMPONENTS

COVERT KIT	REF.	FINISH ●
	TF02	●

Reference order | TF02.TR.XX

REDUGER	REF.	POWER .ST .HI
	ACC.RG	.ST .HI

Reference order | ACC.RG.XX

JOINTS

LINEAR JOINT	ANGLE JOINT	T-JOINT	CROSS JOINT	ROOF-WALL JOINT	FINISH ●
					●
UR02 XX x XXX	**UA02** 130x130mm	**UT02** 223x95mm	**UX02** 210x210mm	**UV02** XX x XXX	

Reference order | XX02.TR.XX

● Select finish






ALBA


REF 10160.TR

PHOTOMETRY




OPAL MICROPRISMATIC

INCLUDED



TR INSTALATION KIT

PROFILE



*1 Tunable White (.TW) values correspond to 2700K and 6500K - .TW is only available for DALI dimmable (.DA), CRI 80 (.8) 700mA. *Los valores del blanco dinámico (.TW) corresponden a 2700K y 6500K. -.TW solo está disponible con protocolo DALI (.DA), CRI 80 (.8) 700mA.*

*2 Down light (direct light) works at 500mA. *La luz directa trabaja a 500mA.*



FINISHES

● COLORS

DIMENSIONS

⬟ LENGTHS mm.

868 | 1153 | 1434 | 1715 | 1996 | 2277

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS


DALI | 1.10 | PUSH


▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

Trimless mounting kit

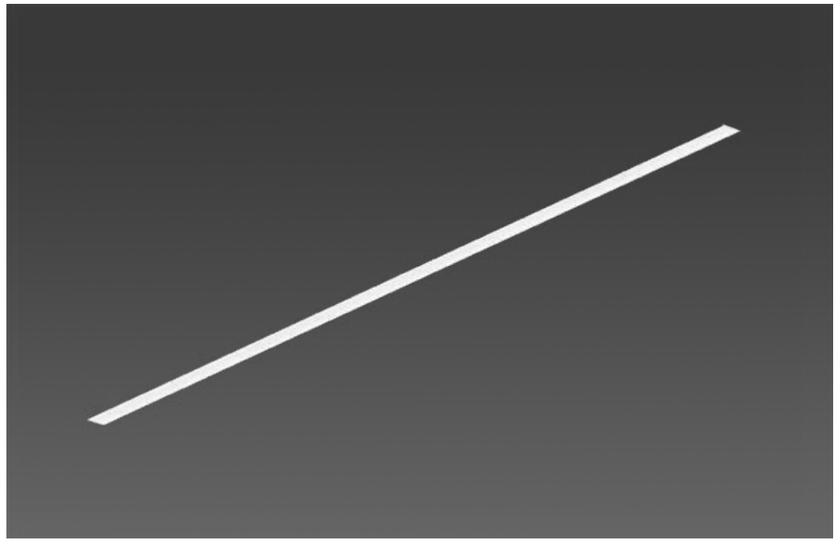



ON DEMAND

Emergency Lighting*
Motion Detection
Well-Certified LED Boards
Taylor your own design
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

INSTALLATIONS



ALBA
MINI

REF 10211.TR



.PN
PENDANT

·10211 ALBA MINI | PN
Pag. 175

.SR
SURFACE


·10211 ALBA MINI | SR
Pag. 175

.RF
RECESSED FRAME

·10211 ALBA MINI | RF
Pag. 175

.TR
TRIMLESS

·10211 ALBA MINI | TR
Pag. 175





REF.	DIMENSION ⬟	MM	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT | LUMEN .27	.30	.40	.TW*2	WATT K	TW	DIMM ▼
10211	.03	868	●	.OP .MP	.ST	.9	2295	2385	2475	5700-5910	18	38	.DA .PU .D1
	.04	1149					3060	3180	3300	7600-7880	24	51	
	.05	1430					3825	3975	4125	9500-9850	30	64	
	.06	1711					4590	4770	4950	11400-11820	35	76	
	.07	1992					5355	5565	5775	13300-13790	41	89	
	.08	2273					6120	6360	6600	15200-15760	47	102	

REF.	DIMENSION ⬟	MM	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT | LUMEN .27	.30	.40	WATT	DIMM ▼
10211	.03	868	●	.OP .MP	.HI	.9	4590	4767	4956	35	.DA .PU .D1
	.04	1149					6120	6356	6608	47	
	.05	1430					7650	7945	8260	59	
	.06	1711					9180	9534	9912	71	
	.07	1992					10710	11123	11564	83	
	.08	2273					12240	12712	13216	94	

Reference order | 10211.XX.TR.XX.XX.XX.X.XX.XX

COMPONENTS

COVERT KIT	REF.	FINISH
	TF03	●

Reference order | TF03.TR.XX

JOINTS

LINEAR JOINT	ANGLE JOINT	T-JOINT	CROSS JOINT	ROOF-WALL JOINT	FINISH
					●
UR03 XX x XXX	**UL03** 130x130mm	**UT03** 223x121,5mm	**UC03** 210x210mm	**UV03** 130x130mm	

Reference order | XX03.TR.XX

● Select finish





ALBA MINI


REF 10211.TR

PHOTOMETRY




OPAL MICROPRISMATIC

INCLUDED



TR INSTALATION KIT

PROFILE



*1 Tunable White (.TW) values correspond to 2700K and 6500K - .TW is only available for DALI dimmable (.DA), CRI 80 (.8) 700mA. *Los valores del blanco dinámico (.TW) corresponden a 2700K y 6500K. -.TW solo está disponible con protocolo DALI (.DA), CRI 80 (.8) 700mA.*

*2 Down light (direct light) works at 500mA. *La luz directa trabaja a 500mA.*



FINISHES

● COLORS

DIMENSIONS

⬟ LENGTHS mm.

863 | 1144 | 1425 | 1706 | 1987 | 2268

LIGHTING OPTIONS

■ DIFFUSERS

-

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH


▲ LIGHT DISTRIBUTION


ASYMETRIC DOWN

LUMINAIRE INCLUDES

Trimless mounting kit

new

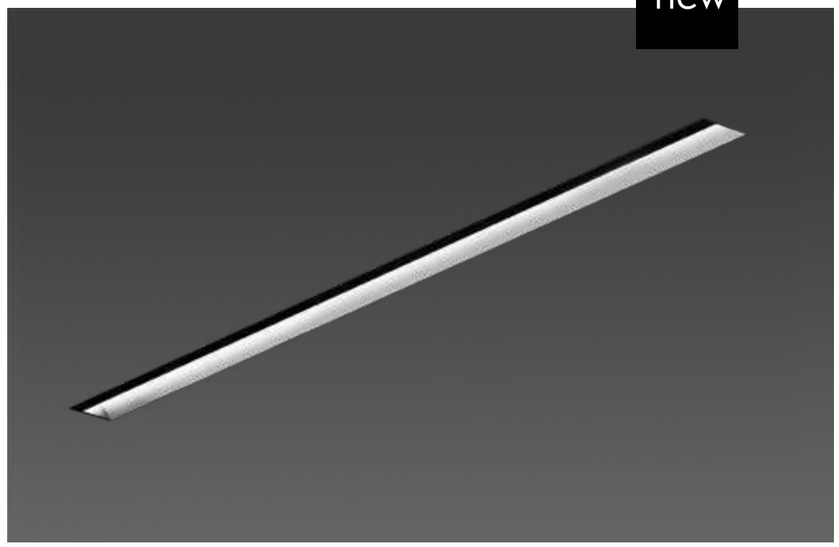



ON DEMAND

Emergency Lighting*
Well-Certified LED Boards
Taylor your own design
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80
Motion Detection

ALBA
PLUS ASIMETRIC

REF 210008.TR

INSTALLATIONS





.PN
PENDANT

·210008 ALBA PLUS ASIMETRIC | PN - Pag. 175

.SR
SURFACE


·210008 ALBA PLUS ASIMETRIC | SR - Pag. 175

.RF
RECESSED FRAME

·210008 ALBA PLUS ASIMETRIC | RF - Pag. 175

.TR
TRIMLESS

·210008 ALBA PLUS ASIMETRIC | TR - Pag. 175





REF.	DIMENSION ⬟	MM	FINISH ●	DIFFUSER ■	POWER	CRI	DOWNLIGHT | LUMEN .27	.30	.40	.TW*2	WATT K	TW	DIMM ▼
210008	.03	863	●	.OP .MP	.ST	.9	2295	2385	2475	5700-5910	18	38	.DA .PU .D1
	.04	1144					3060	3180	3300	7600-7880	24	51	
	.05	1425					3825	3975	4125	9500-9850	30	64	
	.06	1706					4590	4770	4950	11400-11820	35	76	
	.07	1987					5355	5565	5775	13300-13790	41	89	
	.08	2268					6120	6360	6600	15200-15760	47	102	

REF.	DIMENSION ⬟	MM	FINISH ●	DIFFUSER ■	POWER	CRI	DOWNLIGHT | LUMEN .27	.30	.40	WATT	DIMM ▼
210008	.03	863	●	.OP .MP	.HI	.9	4590	4767	4956	35	.DA .PU .D1
	.04	1144					6120	6356	6608	47	
	.05	1425					7650	7945	8260	59	
	.06	1706					9180	9534	9912	71	
	.07	1987					10710	11123	11564	83	
	.08	2268					12240	12712	13216	94	

Reference order | 210008.XX.TR.XX.XX.XX.X.XX.XX

COMPONENTS

COVERT KIT	REF.	FINISH
	TF05	●

Reference order | TF05.TR.XX

JOINTS

LINEAR JOINT

UR05 XX x XXX

.TR

TRIMLESS

● Select finish





ALBA
PLUS ASIMETRIC


REF 210008.TR

PHOTOMETRY




TRANSPARENT PC

INCLUDED



TR INSTALATION KIT

PROFILE



*1 Tunable White (.TW) values correspond to 2700K and 6500K - .TW is only available for DALI dimmable (.DA), CRI 80 (.8) 700mA. *Los valores del blanco dinámico (.TW) corresponden a 2700K y 6500K. -.TW solo está disponible con protocolo DALI (.DA), CRI 80 (.8) 700mA.*

*2 Down light (direct light) works at 500mA. *La luz directa trabaja a 500mA.*



FINISHES

● COLORS

DIMENSIONS

⬟ LENGTHS mm.

863 | 1144 | 1425 | 1706 | 1987 | 2268

LIGHTING OPTIONS

■ DIFFUSERS

-

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH


▲ LIGHT DISTRIBUTION

ASYMETRIC DOWN

LUMINAIRE INCLUDES

Trimless mounting kit

new

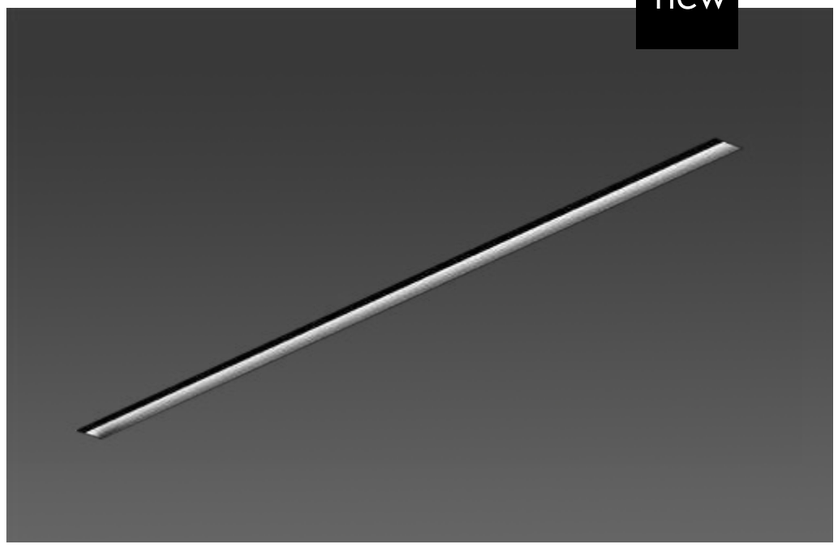



ON DEMAND

Emergency Lighting*
Well-Certified LED Boards
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

.TR

TRIMLESS

INSTALLATIONS



ALBA
ASIMETRIC

REF 210009.TR



.PN
PENDANT

·210009 ALBA ASIMETRIC
| PN - Pag. 175

.WS
WALL SURFACE

·210009 ALABA ASIMETRIC
| WS - Pag. 175

.SR
SURFACE


·210009 ALBA ASIMETRIC
| SR - Pag. 175

.RF
RECESSED FRAME

·210009 ALBA ASIMETRIC
| RF - Pag. 175

.TR
TRIMLESS

·210009 ALBA ASIMETRIC
| TR - Pag. 175





REF.	DIMENSION ⬟	MM	FINISH ●	DIFFUSER ■	POWER	CRI	DOWNLIGHT | LUMEN .27	.30	.40	.TW*2	WATT K	TW	DIMM ▼
210009	.03	863	●	.OP .MP	.ST	.9	2295	2385	2475	5700-5910	18	38	.DA .PU .D1
	.04	1144					3060	3180	3300	7600-7880	24	51	
	.05	1425					3825	3975	4125	9500-9850	30	64	
	.06	1706					4590	4770	4950	11400-11820	35	76	
	.07	1987					5355	5565	5775	13300-13790	41	89	
	.08	2268					6120	6360	6600	15200-15760	47	102	

REF.	DIMENSION ⬟	MM	FINISH ●	DIFFUSER ■	POWER	CRI	DOWNLIGHT | LUMEN .27	.30	.40	WATT	DIMM ▼
210009	.03	863	●	.OP .MP	.HI	.9	4590	4767	4956	35	.DA .PU .D1
	.04	1144					6120	6356	6608	47	
	.05	1425					7650	7945	8260	59	
	.06	1706					9180	9534	9912	71	
	.07	1987					10710	11123	11564	83	
	.08	2268					12240	12712	13216	94	

Reference order | 210009.XX.TR.XX.XX.XX.X.XX.XX

COMPONENTS

COVERT KIT	REF.	FINISH
	TF06	●

Reference order | TF06.TR.XX

JOINTS

LINEAR JOINT

UR06 XX x XXX

.TR

TRIMLESS

● Select finish





ALBA
ASIMETRIC


REF 210009.TR

PHOTOMETRY




TRANSPARENT PC

INCLUDED



TR INSTALATION KIT

PROFILE



*1 Tunable White (.TW) values correspond to 2700K and 6500K - .TW is only available for DALI dimmable (.DA), CRI 80 (.8) 700mA. *Los valores del blanco dinámico (.TW) corresponden a 2700K y 6500K. -.TW solo está disponible con protocolo DALI (.DA), CRI 80 (.8) 700mA.*

*2 Down light (direct light) works at 500mA. *La luz directa trabaja a 500mA.*



FINISHES

● COLORS

DIMENSIONS

⬟ LENGTHS mm.

863 | 1144 | 1425 | 1706 | 1987 | 2268

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS


DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

Trimless mounting kit

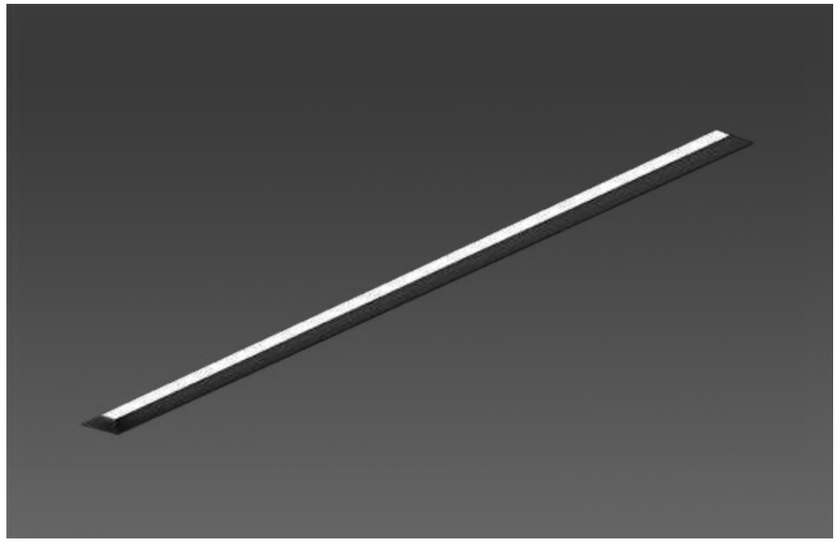



ON DEMAND


Emergency Lighting *
Motion Detection
Well-Certified LED Boards
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

INSTALLATIONS



WING

REF 10200.TR

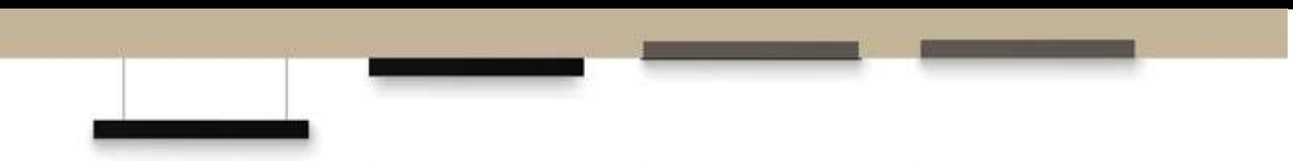

.PN
PENDANT

·10200 WING | PN
Pag. 175

.SR
SURFACE


·10200 WING | SR
Pag. 175

.RF
RECESSED FRAME

·10200 WING | RF
Pag. 175

.TR
TRIMLESS

·10200 WING | TR
Pag. 175





REF.	DIMENSION ⬟	MM	FINISH ●	DIFFUSER ■	POWER	CRI	DOWNLIGHT | LUMEN .27	.30	.40	.TW*2	WATT K	TW	DIMM ▼
10200	.03	863	●	.OP .MP	.ST	.9	2295	2385	2475	5700-5910	18	38	.DA .PU .D1
	.04	1144					3060	3180	3300	7600-7880	24	51	
	.05	1425					3825	3975	4125	9500-9850	30	64	
	.06	1706					4590	4770	4950	11400-11820	35	76	
	.07	1987					5355	5565	5775	13300-13790	41	89	
	.08	2268					6120	6360	6600	15200-15760	47	102	

REF.	DIMENSION ⬟	MM	FINISH ●	DIFFUSER ■	POWER	CRI	DOWNLIGHT | LUMEN .27	.30	.40	WATT	DIMM ▼
210009	.03	863	●	.OP .MP	.HI	.9	4590	4767	4956	35	.DA .PU .D1
	.04	1144					6120	6356	6608	47	
	.05	1425					7650	7945	8260	59	
	.06	1706					9180	9534	9912	71	
	.07	1987					10710	11123	11564	83	
	.08	2268					12240	12712	13216	94	

Reference order | 10200.XX.TR.XX.XX.XX.X.XX.XX

COVERT KIT	REF.	FINISH
	TF13	●

Reference order | TF13.TR.XX ●

REDUGER	REF.	POWER
	ACC.RG	.ST .HI

Reference order | ACC.RG.XX

JOINTS

LINEAR JOINT

UR13 40 x52mm

● Select finish





WING


REF 10200.TR

PHOTOMETRY




OPAL MICROPRISMATIC

INCLUDED



TR INSTALATION KIT

PROFILE



*1 Tunable White (.TW) values correspond to 2700K and 6500K - .TW is only available for DALI dimmable (.DA), CRI 80 (.8) 700mA. *Los valores del blanco dinámico (.TW) corresponden a 2700K y 6500K.*
-.TW solo está disponible con protocolo DALI (.DA), CRI 80 (.8) 700mA.
*2 Down light (direct light) works at 500mA. *La luz directa trabaja a 500mA.*



FINISHES

● PROFILE COLORS

● EYE COLORS

DIMENSIONS

⬟ LENGTHS mm.

1m.

LIGHTING OPTIONS

■ DIFFUSERS

ACRYLIC

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

-


▲ LIGHT DISTRIBUTION


DOWN

LUMINAIRE INCLUDES

Trimless mounting kit

new

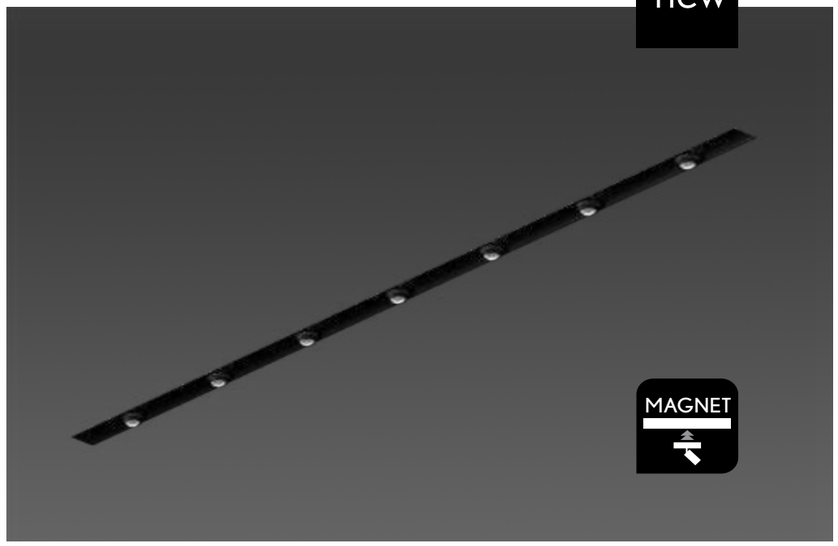

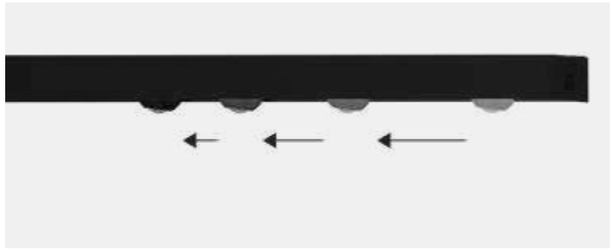



.TR

TRIMLESS

INSTALLATIONS



EYE

REF 210016.TR



.PN
PENDANT


·210016 EYE|PN
Pag. 175

.SR
SURFACE


·210016 EYE|SR
Pag. 175

.TR
TRIMLESS

·210016 EYE|TR
Pag. 175






EYE	REF.	DIMEN-SION ⬟	FINISH	SKETCH
	210006	.01	.BK-BK .WH-WH	

Reference order ⬟ ● 210006.XX.TR.XX

POWER	REF.	DIMEN-SION ⬟	FINISH	SKETCH
	XXXX	??	.BK-BK .WH-WH	

Reference order ⬟ ● 210006.XX.TR.XX

EYE MODULE	REF.	DIMENSION ⬟	FINISH	OPTIC OPTIONS ■	POWER	CRI	LUMEN .27	LUMEN .30	LUMEN .40	WATT	VdC	DIMM ▼	SKETCH
	20210	.01	●	.AC	.ST	.9	XXX	XXX	XXX	5	48	-	

Reference order ⬟ ● ■ ▼ 20210.XX.PN.XX.XX.ST.9.XX.XX

COMPONENTS

COVERT KIT	REF.	FINISH
	TF16	●


Reference order ● TF16.TR.XX

LINEAR JOINT + FLEXIBLE JOINT CONNECTOR	FINISH ●
	.BK-BK .WH-WH

Reference order ● UR16.XX

POWER FEEDER UNIT	FINISH ●
	.BK-BK .WH-WH

● ACC210016.CA.XX

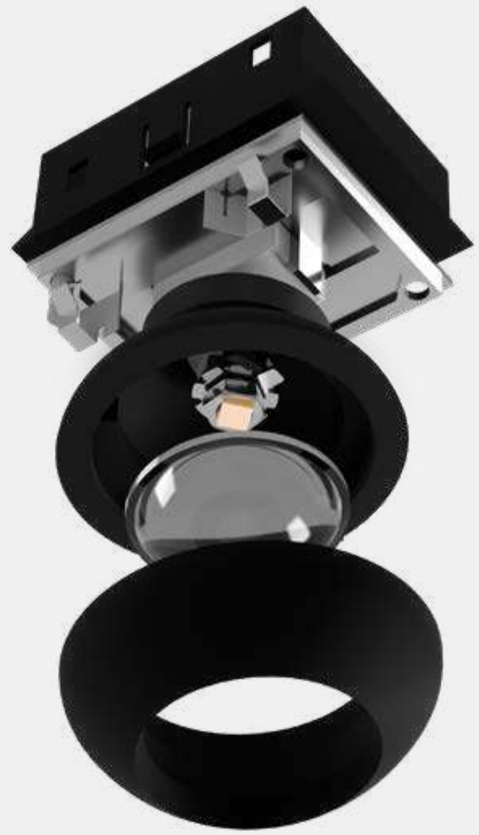

.TR

TRIMLESS

● Select profile finishes

.WH-WH .BK-BK

● Select eye finishes

.WH-WH .BK-BK .GC-GC

ALUMINIUM PC · 0° · 0° · CRI ≥90 · IK06 · IP20 IP43 · LIFE 50000H · DIM OPTIONAL · INTEGRATED · INDOOR · 220-240 V 50-60 Hz · CE


EYE

REF 210014.TR

PHOTOMETRY


OPAL

INCLUDED



TR INSTALATION KIT

PROFILE





FINISHES

● COLORS

DIMENSIONS

⬟ LENGTHS

PER METER

COMPONENTS

PATRICIA
LED MODULES
LENSES

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS


DALI

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

Trimless mounting kit

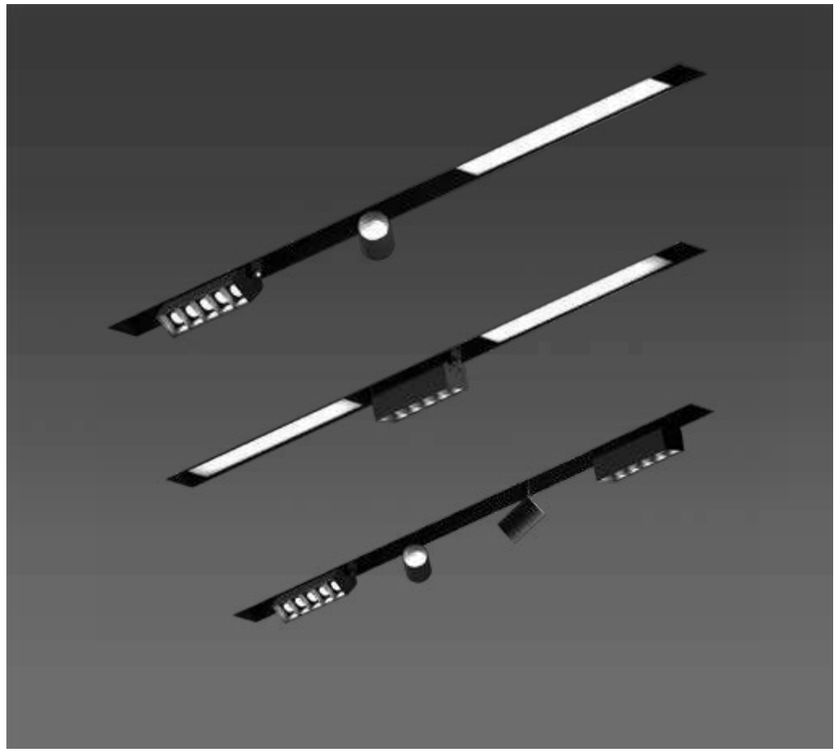

MAGNET

ON DEMAND

Taylor your own design

.TR

TRIMLESS

INSTALLATIONS

ALUMINIUM PC · 0° · 0° · CRI ≥90 · IK06 · IP20 IP43 · LIFE 50000H · DIM OPTIONAL · INTEGRATED · INDOOR · 220-240 V 50-60 Hz · CE

ALARIK

REF 10225.TR



.PN
PENDANT


·10225 ALARIK | PN
Pag. 175

.SR
SURFACE


·10225 ALARIK | SR
Pag. 175

.TR
TRIMLESS

·10225 ALARIK | TR
Pag. 175






ALARIK	REF.	DIMEN-SION ⬟	FINISH ●	SKETCH
	**10225**	**.01** 1m	●	


POWER	DIMENSION ⬟	WATT
DR48	**.01**	75
	.02	120
	.03	200

Reference order | 10225.XX.TR.XX (⬟ ●)




Reference order | DR48.XX (⬟)

PATRICIA S	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	**20146**	**.01**	●	**.15** **.24** **.38**	**.ST**	**.9**	**.27**	576	8	48	**.DA**	
							.30	607				
							.40	695				



Reference order | 20146.XX.XX.XX.ST.9.XX.XX (⬟ ● ■ ▼)

PATRICIA M	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	**20193**	**.01**	●	**.15** **.24** **.38**	**.ST**	**.9**	**.27**	1173	13	48	**.DA**	
							.30	1181				
							.40	1207				

Reference order | 20193.XX.XX.XX.ST.9.XX.XX (⬟ ● ■ ▼)

LED MODULES	REF.	DIMEN-SION ⬟	FINISH ●	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	**11542**	**.01**	**.BK-BK**	**.OP**	**.ST**	**.9**	**.27**	765	6	48	**.DA**	
							.30	795				
							.40	825				
	**11542**	**.02**	**.BK-BK**	**.OP**	**.ST**	**.9**	**.27**	1530	12	48	**.DA**	
							.30	1590				
							.40	1650				
	**11542**	**.03**	**.BK-BK**	**.OP**	**.ST**	**.9**	**.27**	2295	18	48	**.DA**	
							.30	2385				
							.40	2475				

Reference order | 11542.XX.XX.XX.ST.9.XX.XX (⬟ ● ■ ▼)

LENSES	REF.	DIMEN-SION ⬟	SHAPE ◗	FINISH ●	OPTIC OP. ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	**11534**	**.05**	**.RO** **.SQ**	**.BK-BK**	**.20** **.40** **.60**	**.ST**	**.9**	**.27**	660	10	48	**.DA**	
								.30	750				
								.40	827				
	**11534**	**.05F**	**.RO** **.SQ**	**.BK-BK**	**.20** **.40** **.60**	**.ST**	**.9**	**.27**	660	10	48	**.DA**	
								.30	750				
								.40	827				


ROUND .RO
26x29,3 mm
Int Ø14,5 - Ext. Ø23 mm


SQUARE .SQ
26x29,3 mm
Ø14,5 mm

Reference order | 11534.XX.XX.XX.XX.ST.9.XX.XX (⬟ ◗ ● ■ ▼)

.TR

TRIMLESS

- Select finish


.WH-WH .BK-BK



ALARIK

REF 10225.TR

PHOTOMETRY

PATRICIA


15º 24º 38º


PHOTOMETRY

LENSES



20º 40º 60º

PHOTOMETRY


LED MODULES


OPAL MICROPRISMATIC

INCLUDED


TR INSTALATION KIT

PROFILE



COMPONENTS

COVERT KIT	REF.	FINISH
	TF18	●

Reference order | TF18.TR.XX ●

JOINTS

LINEAR JOINT	ANGLE JOINT	T-JOINT	CROSS JOINT	ROOF-WALL JOINT	FINISH
		X	X	X	●
UR18 XX x XX	UL18 XX x XX	X	X	X	

* Each joint requires an additional driver to that of the luminaire. *Cada unión requiere de un driver adicional al de la luminaria.*

Reference order | XX18.TR.XX ●



.TR

TRIMLESS

● Select finish




.WH-WH .BK-BK



ALARIK

REF 10225.TR

INCLUDED



TR INSTALATION KIT



SLIM PATRICIA
11544
.01 | .02 | .03

SLIM PATRICIA
11544
.01 | .02 | .03

SLIM PATRICIA
11544
.01 | .02 | .03

SLIM PATRICIA
11544
.01 | .02 | .03

SLIM PATRICIA
11544
.01 | .02 | .03



SLIM PATRICIA
11544
.01 | .02 | .03

SLIM PATRICIA
11544
.01 | .02 | .03


SLIM PATRICIA
11544
.01 | .02 | .03

SLIM PATRICIA
11544
.01 | .02 | .03

ALARIK SLIM

new



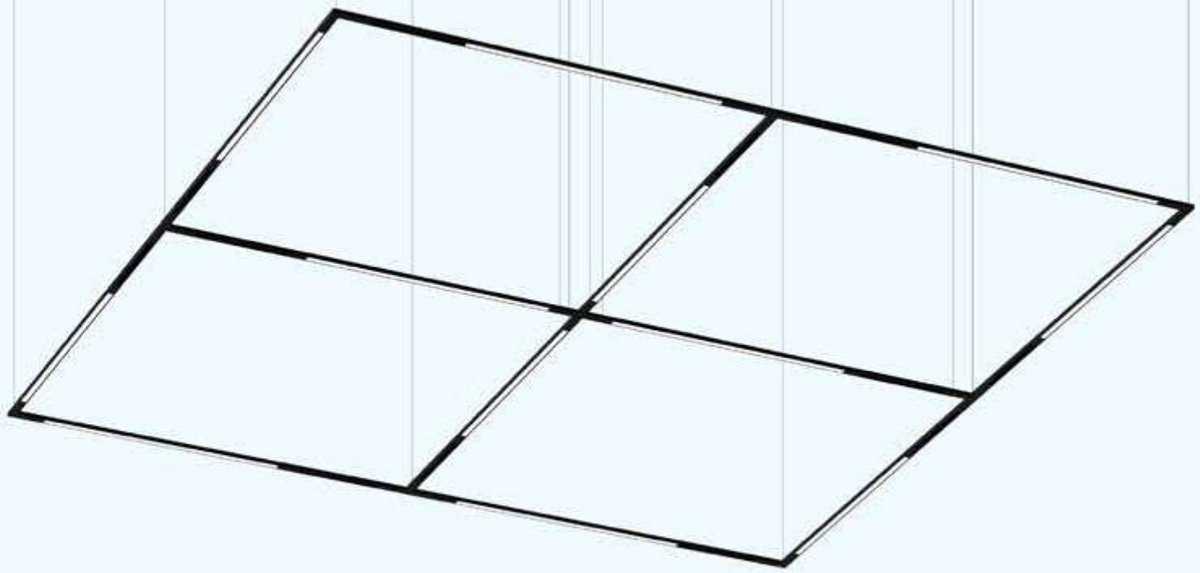



FINISHES

● COLORS

DIMENSIONS

⬟ LENGTHS

PER METER

COMPONENTS

SLIM PATRICIA
SLIM LED BALL
SLIM TUBE
SLIM WALL WASHER
SLIM LENSES
SLIM MOTION LENSES
SLIM LED MODULES

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10


▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

Trimless mounting kit

new

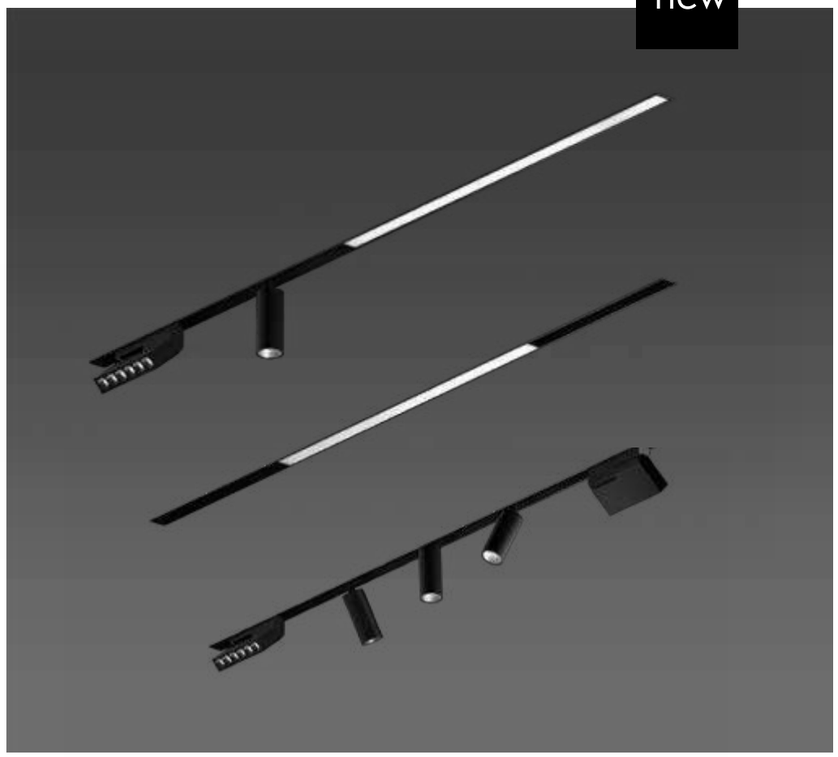

MAGNET

ON DEMAND

Taylor your own design

.TR

TRIMLESS

INSTALLATIONS



ALARIK
SLIM

REF 20224.TR



.PN
PENDANT

·20224 ALARIK SLIM | PN
Pag. 175

.SR
SURFACE

·20224 ALARIK SLIM | SR
Pag. 175

.RF
RECESSED FRAME


·20224 ALARIK SLIM | RF
Pag. 175

.TR
TRIMLESS

·20224 ALARIK SLIM | TR
Pag. 175





ALARIK SLIM	REF.	DIMEN-SION ⬟	FINISH ●	SKETCH
	**20224**	**.01** 1 mt.	●	

Reference order | 20224.XX.TR.XX

POWER	DIMENSION ⬟	WATT
DR48	**.01**	75
	.02	120
	.03	200


Reference order | DR48.XX

INTEGRATED POWER	REF.	WATT
	**10246.DR** (404x43x22mm)	200W


Reference order | 10246.DR

SLIM PATRICIA	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	**11544**	**.01**	●	**.15 .38 .60**	.ST	.9	.27	576	8	48	**.DA .D1**	
							.30	607				
							.40	695				
	**11544**	**.02**	●	**.15 .38 .60**	.ST	.9	.27	1173	15	48	**.DA .D1**	
							.30	1181				
							.40	1207				



Reference order | 11544.XX.XX.XX.ST.9.XX.XX

SLIM PATRICIA ZOOM	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	**11546**	**.03**	●	**.15-36 .36-60**	.ST	.9	.27	2038	25	48	**.DA .D1**	
							.30	2254				
							.40	2320				


Reference order | 11546.XX.XX.XX.ST.9.XX.XX

SLIM LED BALL	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	**11551**	**.01**	●	**.37**	.ST	.9	.27	760	8	48	**.DA .D1**	
							.30	808				
							.40	848				



Reference order | 11551.XX.XX.XX.ST.9.XX.XX

SLIM LED TUBE	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	**11552**	**.01** Ø40 x 40	●	**.20 .40**	.ST	.9	.27	808	14	48	**.DA .D1**	
							.30	820				
							.40	881				
	**11552**	**.02** Ø60 x 60	●	**.20 .40**	.ST	.9	.27	1662	21	48	**.DA .D1**	
							.30	1716				
							.40	1729				

Reference order | 11552XX.XX.XX.ST.9.XX.XX

SLIM WALL WASHER	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	**11550**	**.01**	**.BK-BK**	-	.ST	.9	.27	1100	15	48	**.DA .D1**	
							.30	1169				
							.40	1251				

Reference order | 11550.XX.XX.XX.ST.9.XX.XX

SLIM LENSES	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	**11548**	**.01**	**.BK-BK**	**.15 .38**	.ST	.9	.27	660	8	48	**.DA .D1**	
							.30	750				
							.40	827				
	**11548**	**.02**	**.BK-BK**	**.15 .38**	.ST	.9	.27	1320	15	48	**.DA .D1**	
							.30	1511				
							.40	1654				

Reference order | 11548.XX.XX.XX.ST.9.XX.XX

● Select finish





ALARIK SLIM

REF 20224.TR

PHOTOMETRY

SLIM PATRICIA



15º 36º 38º 60º

PHOTOMETRY

SLIM LED BALL

XXº

SLIM WALL WASHER



XXº


PHOTOMETRY

SLIM TUBE | SLIM LENSES




20º 40º


INCLUDED






TR INSTALATION KIT

PROFILE



SLIM MOTION LENSES	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VaC	DIMM ▼	SKETCH
	**11547**	**.01**	**.BK-BK**	**.15** **.38**	.ST	.9	.27	660	8	48	**.DA** **.D1**	
							.30	750				
							.40	827				

Reference order | 11547.XX.XX.XX.ST.9.XX.XX

SLIM LED MODULES	REF.	DIMEN-SION ⬟	FINISH ●	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	VaC	DIMM ▼	SKETCH
	**11549**	**.01**	**.BK-BK**	**.OP**	.ST	.9	.27	558	9	48	**.DA** **.D1**	
							.30	560				
							.40	604				
	**11549**	**.02**	**.BK-BK**	**.OP**	.ST	.9	.27	1115	18	48	**.DA** **.D1**	
							.30	1120				
							.40	1208				
	**11549**	**.03**	**.BK-BK**	**.OP**	.ST	.9	.27	1670	24	48	**.DA** **.D1**	
							.30	1680				
							.40	1812				




Reference order | 11549.XX.XX.XX.ST.9.XX.XX


COMPONENTS

COVERT KIT	REF.	FINISH
	**TF19**	●

Reference order | TF19.TR.XX

JOINTS & CONNECTORS

LINEAR JOINT	ANGLE JOINT	ROOF-WALL JOINT
		
UR19	**UL19**	**UV19**

POWER FEEDER UNIT

ACC20224.CA

.TR

TRIMLESS

● Select finish



.WH-WH .BK-BK



ALARIK
SLIM

REF 20224.TR

PHOTOMETRY

SLIM MOTIONLENSES



15º 38º

PHOTOMETRY

SLIM LED MODULES



OPAL

JOINTS CONNECTORS



10246.UA
FLEXIBLE JOINT CONNECTOR



10246.UL
LINEAR JOINT CONNECTOR



10246.CA
POWER FEEDER UNIT



FINISHES

● COLORS

DIMENSIONS

⬟ LENGTHS

PER METER

COMPONENTS

MINI PATRICIA
MINI PATRICIA LOL
MINI PATRICIA ZOOM
MINI MOTION LENSES
MINI LENSES
MINI LED MODULES
MINI PATRICIA FLAT
MINI PATRICIA ROUND LENSES

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

-

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

2 x Suspension cables 2m
NON-DIM DOWN or DIM DOWN: 1 x Power feeder
Connection box

new



MAGNET

ON DEMAND
Taylor your own design

.TR

TRIMLESS

ALARIK MINI

REF 210006.TR

ALUMINIUM PC | 0° | 0° | CRI ≥90 | IK08 | IP20 IP43 | LIFE 50000H | DIM OPTIONAL | | INTEGRATED | INDOOR | | | 220-240 V 50-60 Hz | CE

INSTALLATIONS



.PN
PENDANT

·210006 ALARIK MINI | PN
Pag. 175




.SR
SURFACE

·210006 ALARIK MINI | SR
Pag. 175


.TR
TRIMLESS

·210006 ALARIK MINI | TR
Pag. 175








ALARIK MINI		DIMEN-SION ⬟	FINISH ●	SKETCH
	210006	.01 1m	●	



Reference order | 210006.XX.TR.XX

POWER	DIMENSION ⬟	WATT
DR48	.01	75
	.02	120
	.03	200


Reference order | DR48.XX

POWER FEEDER	REF.	FINISH ●	SKETCH
	ACC21006.CA	.BK-BK .WH-WH	


Reference order | ACC21006.CA.XX

MINI PATRICIA	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	450001	.01	●	.15 .30 .36	.ST	.9	.27	576	3	48	-	
							.30	607				
							.40	695				
	450001	.02	●	.15 .24 .36	.ST	.9	.27	1173	8	48	-	
							.30	1181				
							.40	1207				


Reference order | 450001.XX.XX.XX.ST.9.XX.XX

MINI PATRICIA LOL	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	450002	.01	●	.36	.ST	.9	.27	576	6	48	-	
							.30	607				
							.40	695				


Reference order | 450002.XX.XX.XX.ST.9.XX.XX

MINI PATRICIA ZOOM	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	450003	.01	●	.15-40	.ST	.9	.27	576	6	48	-	
							.30	607				
							.40	695				

Reference order | 450003.XX.XX.XX.ST.9.XX.XX

MINI PATRICIA FLAT	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	450007	.01	●	.15 .30 .36	.ST	.9	.27	558	5	48	-	
							.30	560				
							.40	604				

Reference order | 450007.XX.XX.XX.ST.9.XX.XX

MINI PATRICIA ROUND LENSES	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	450008	.01	●	.15 .30 .36	.ST	.9	.27	558	9	48	-	
							.30	560				
							.40	604				

Reference order | 450008.XX.XX.XX.ST.9.XX.XX

.TR

TRIMLESS

- Select finishes



.WH-WH .BK-BK



ALARIK MINI

REF 210006.TR

PHOTOMETRY

MINI PATRICIA



15º 24º 38º

PHOTOMETRY

MINI PATRICIA ZOOM

15º


PHOTOMETRY

MINI PATRICIA FLAT | LENSES




15º 30º 36º

INCLUDED




TR INSTALATION KIT

PROFILE






MINI LENSES	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	450005	.01	●	.23 .28 .36	.ST	.9	.27	558	12	48	-	
							.30	560				
							.40	604				

Reference order | 450005.XX.XX.XX.ST.9.XX.XX

MINI MOTION LENSES	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	450004	.01	●	.23 .28 .36	.ST	.9	.27	576	9	48	-	
							.30	607				
							.40	695				

Reference order | 450004.XX.XX.XX.ST.9.XX.XX

MINI LED MODULES	REF.	DIMEN-SION ⬟	FINISH ●	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	450006	.01	●	.OP	.ST	.9	.27	558	6	48	-	
							.30	560				
							.40	604				
	450006	.02	●	.OP	.ST	.9	.27	1115	12	48	-	
							.30	1120				
							.40	1208				
	450006	.03	●	.OP	.ST	.9	.27	1670	24	48	-	
							.30	1680				
							.40	1812				

Reference order | 450006.XX.XX.XX.ST.9.XX.XX

COMPONENTS

COVERT KIT	REF.	FINISH
	TF21	●

Reference order | TF21.TR.XX

JOINTS & CONNECTORS

LINEAR JOINT	ANGLE JOINT	CROSS JOINT	T-JOINT	ROOF-WALL JOINT		FINISH ●
						.BK .WH
UR21	UL21	UC21	UT21	UV21	ACC21006.UP	

Reference order | XX.XX

.TR

TRIMLESS

● Select finishes



.WH-WH .BK-BK



ALARIK
MINI

REF 210006.TR

PHOTOMETRY


MINI LENSES



23º 28º 60º

PHOTOMETRY

MINI LED MODULES



OPAL



FINISHES

● COLORS

DIMENSIONS

⬟ LENGTHS

PER METER

COMPONENTS

LED MODULES
LENSES
MINI TUBE
MINI TUBE STICK

POWER

STANDARD

CRI

90

COLOR TEMPERATURE


2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

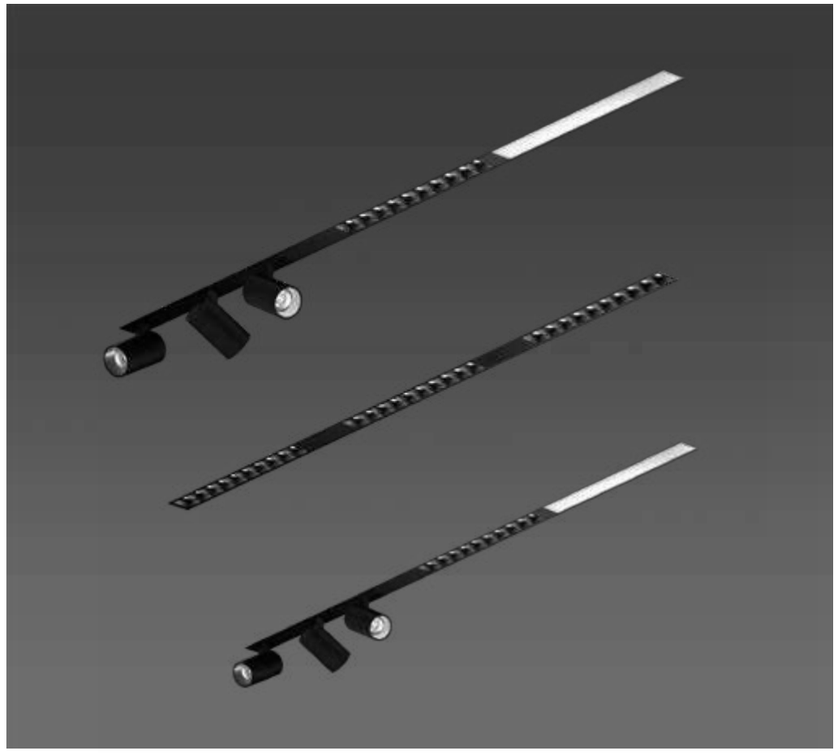

LUMINAIRE INCLUDES

Trimless mounting kit

ON DEMAND

Emergency Lighting*
Motion Detection
Taylor your own design
Special RAL Color
Tunable White

MODULIGHT

REF 10210.TR

INSTALLATIONS





.PN
PENDANT

·10210 MODULIGHT | PN
Pag. 175

.SR
SURFACE


·10210 MODULIGHT | SR
Pag. 175

.RF
RECESSED FRAME



·10210 MODULIGHT | RF
Pag. 175

.TR
TRIMLESS

·10210 MODULIGHT | TR
Pag. 175






MODULIGHT	REF.	DIMEN-SION ⬟ *2	FINISH ●	SKETCH
	**10210**	**.01** 1m	●	


Reference order | 10210.XX.TR.XX

REF.	DIMENSION * ⬟		DIMM ▼
DR10210	**.01**	0 - 15 W	**.DA .PU .D1**
	.02	16 - 30 W	
	.03	31 - 65 W	
	.04	66 - 90 W	

Reference order | DR10210.XX.XX

MINI TUBE	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	SKETCH
	**11526**	**.01** 100mm.	**.BK-BK .WH-WH**	**.15 .24 .38**	.ST	.9	**.27**	348	8	700	
							.30	362			
							.40	421			

Reference order | 11526.XX.XX.XX.ST.9.XX

MINI TUBE STICK	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	SKETCH
	**11538**	**.01** 100mm.	**.BK-BK .WH-WH**	**.15 .24 .38**	.ST	.9	**.27**	348	8	700	
							.30	362			
							.40	421			

Reference order | 11538.XX.XX.XX.ST.9.XX

LENSES	REF.	DIMEN-SIONS ⬟	SHAPE ◗	FINISH ●	OPTIC OPTIONS ■	POW-ER	CRI	K	LUMEN	WATT	mA	SKETCH
	**11525**	**.01** 29mm.	**.RO .SQ**	●	**.20 .40 .60**	.ST	.9	**.27**	142	2	700	
							.30	161				
							.40	212				
	**11525**	**.03** 80mm.	**.RO .SQ**	●	**.20 .40 .60**	..ST	.9	**.27**	426	6	700	
							.30	483				
							.40	636				
	**11525**	**.05** 133mm.	**.RO .SQ**	●	**.20 .40 .60**	.ST	.9	**.27**	710	10	700	
							.30	805				
							.40	1060				
	**11525**	**.10** 263mm.	**.RO .SQ**	●	**.20 .40 .60**	.ST	.9	**.27**	1420	20	700	
							.30	1611				
							.40	2120				

Reference order | 11525.XX.XX.XX.XX.ST.9.XX

COVER	REF.	FINISH ●
	**OPAQUE**	**.WH-WH .BK.BK**

Reference order | OPAQUE.XX


ROUND .RO
26x29,3 mm
Int Ø14,5 - Ext. Ø23 mm


SQUARE .SQ
26x29,3 mm
Ø14,5 mm

*1 Modular system that requires a technical drawing. *Sistema modular que require de un plano técnico.*

*2 Driver power must be at least 15% higher than the sum of the power of selected LED modules. *La potencia del driver deber ser por lo menos un 15% mayor que la suma de la potencia de los modulos LED elegidos.*

● Select finish





MODULIGHT

REF 10210.TR

PHOTOMETRY

MINI TUBE




PHOTOMETRY


MINI LENSES



PROFILE



LED MODULES	REF.	DIMEN-SION ⬟	FINISH ●	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	SKETCH
	11524	**.01** 281mm.	**.BK-BK**	**.OP** **.MP**	**.HI**	**.9**	**.27**	953	12	700	
							.30	972			
							.40	1141			
	11524	**.02** 562mm.	**.BK-BK**	**.OP** **.MP**	**.HI**	**.9**	**.27**	1906	24	700	
							.30	1944			
							.40	2282			
	11524	**.03** 843mm.	**.BK-BK**	**.OP** **.MP**	**.HI**	**.9**	**.27**	2859	36	700	
							.30	2916			
							.40 (16)	3423			
	11524	**.04** 1124mm.	**.BK-BK**	**.OP** **.MP**	**.HI**	**.9**	**.27**	3812	48	700	
							.30	3888			
							.40	4564			
	11524	**.05** 1405mm.	**.BK-BK**	**.OP** **.MP**	**.HI**	**.9**	**.27**	4765	60	700	
							.30	4860			
							.40	5705			
	11524	**.06** 1686mm.	**.BK-BK**	**.OP** **.MP**	**.HI**	**.9**	**.27**	5718	72	700	
							.30	5832			
							.40	6846			



Reference order | 11524.XX.XX.XX.HI.9.XX

COMPONENTS

COVERT KIT	REF.	FINISH
	**TF23**	●

Reference order | TF23.TR.XX

JOINTS


LINEAR JOINT	ANGLE JOINT	T-JOINT	CROSS JOINT	ROOF-WALL JOINT	FINISH
		**X**	**X**		●
UR23 XXXxXXmm	**UL23** XXXxXXXmm	**X**	**X**	**UV23** XXXxXXXmm	

Reference order | XX23.TR.XX

.TR

TRIMLESS

● Select finish






MODULIGHT

REF 10210.TR


PHOTOMETRY

LED MODULES




OPAL | MICROPRISMATIC


INCLUDED



TR INSTALATION KIT

PROFILE



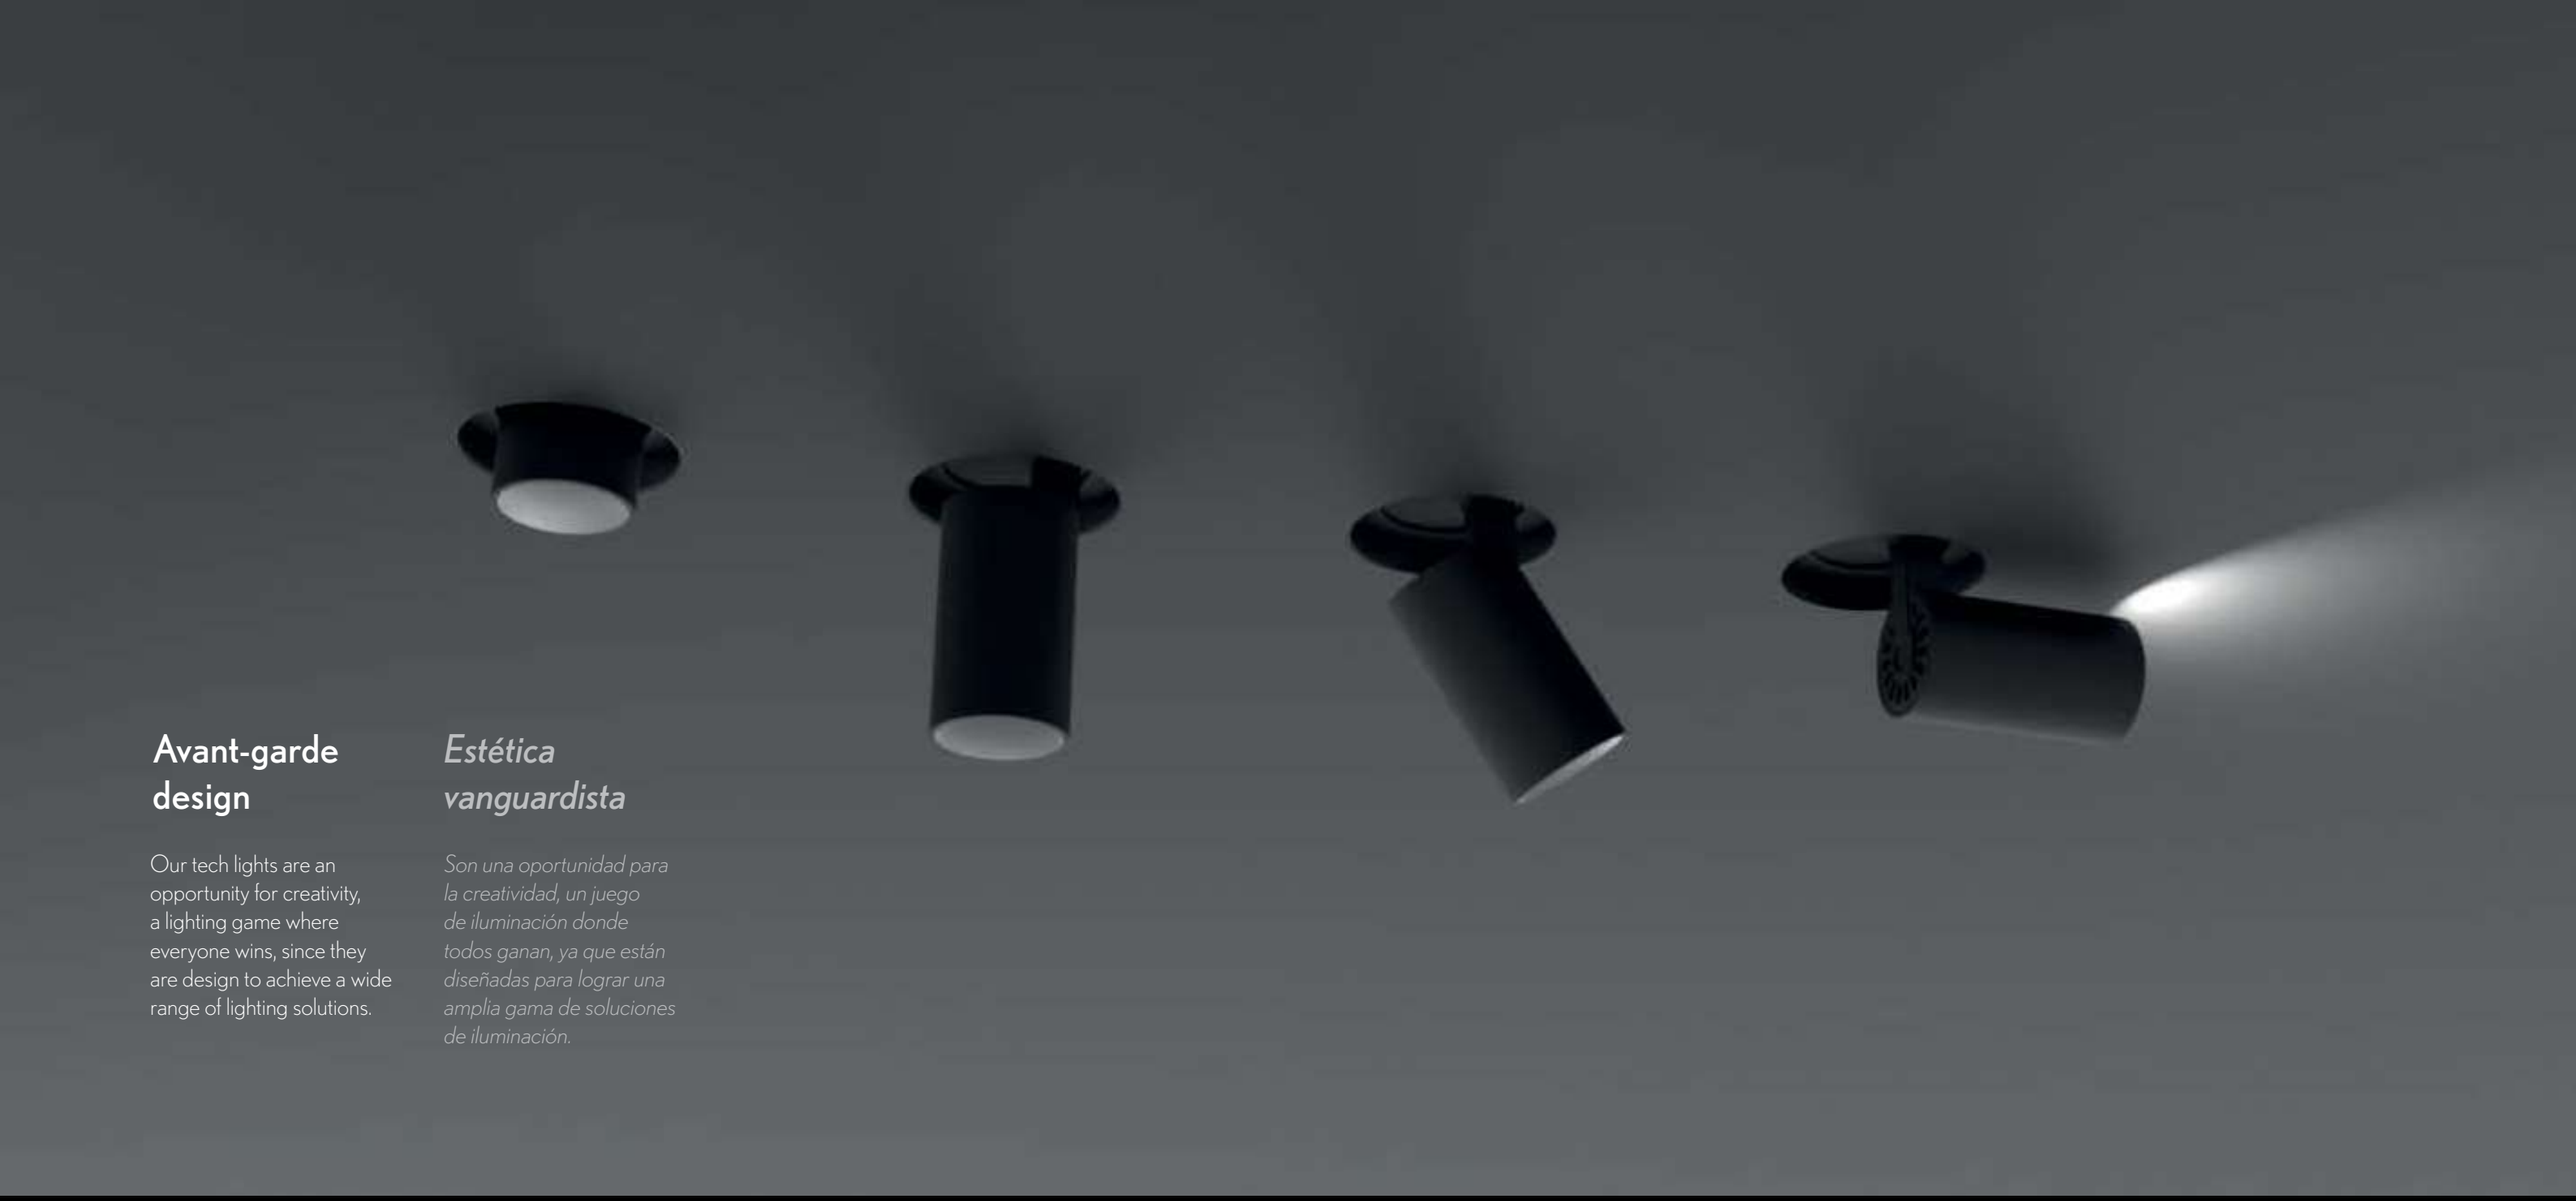

Avant-garde design




Our tech lights are an opportunity for creativity, a lighting game where everyone wins, since they are design to achieve a wide range of lighting solutions.

Estética vanguardista

Son una oportunidad para la creatividad, un juego de iluminación donde todos ganan, ya que están diseñadas para lograr una amplia gama de soluciones de iluminación.

TECH

TRIMLESS

MARTORELL	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	**20115**	**.01**	**.WH-WH .BK-BK**	**LED**	**.24 .32**	**.ST**	**.9**	**.27**	175	3	700	**.DA .PU .D1**	
								.30	188				
								.40	199				
	**20115**	**.02**	●	**LED**	**.15 .24 .32**	**.ST**	**.9**	**.27**	470	8	700	**.DA .PU .D1**	
								.30	498				
								.40	515				
	**20115**	**.03**	●	**LED**	**.24 .32**	**.ST**	**.9**	**.27**	1071	15	350	**.DA .PU .D1**	
								.30	1156				
								.40	1198				

Reference order ⬟ ● ■ ▼

20115.XX.TR.XX.XX.ST.9.XX.XX

● Select finishes

.BK-BK	.BK-WH	.BK-GC	.BK-BM	.BK-BS	.BK-BC	.BK-CR	.BK-CB	.BK-GY	.BK-MG	.BK-VC	.BK-YM
.WH-BK	.WH-WH	.WH-GC	.WH-BM	.WH-BS	.WH-BC	.WH-CR	.WH-CB	.WH-GY	.WH-MG	.WH-VC	.WH-YM

• FINISHES

EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

20º 40º | 15º 24º 38º | 25º 38º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND


Dim to Warm (.02, .03)
Tunable White (.02, .03)
Honey Comb (.03)
Wireless Control Options
Special RAL Color



.TR

TRIMLESS

INSTALLATIONS

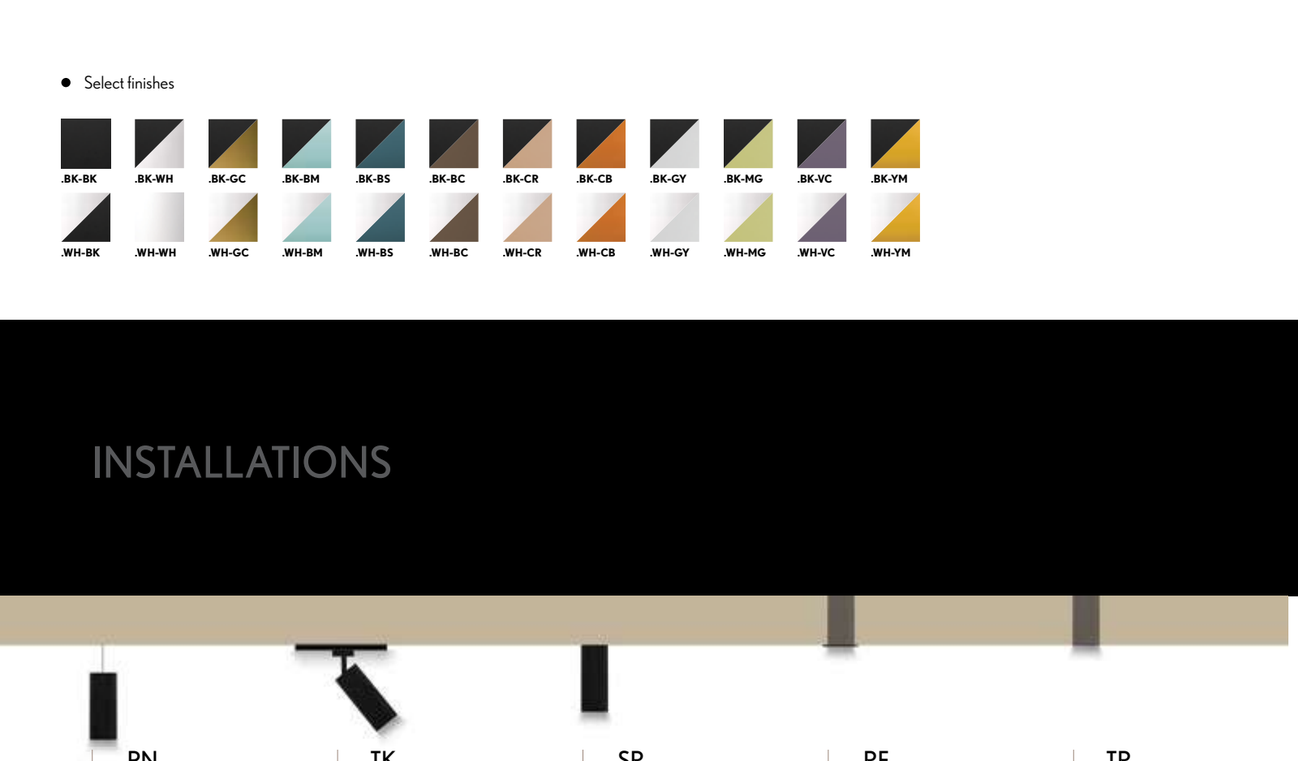

.PN
PENDANT

·20115 MARTORELL | PN
Pag. 175

.TK
TRACKLIGHT

·20115 MARTORELL | TK
Pag. 175

.SR
SURFACE

·20115 MARTORELL | SR
Pag. 175

.RF
RECESSED FRAME

·20115 MARTORELL | RF
Pag. 175

.TR
TRIMLESS

·20115 MARTORELL | TR
Pag. 175

ALUMINIUM PC | 0° | 0° | CRI ≥90 | IK06 | IP20 IP43 | LIFE 50000H | DIM OPTIONAL | | INTEGRATED | INDOOR | | | 220-240 V 50-60 Hz | CE

MARTORELL


REF 20115.TR

PHOTOMETRY




15º 20º 40º



MARTORELL TÁRREGA	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	20117	.01	●	LED	.25 .38	.ST	.9	.27	659	10	500	.DA .PU .D1	
								.30	691				
								.40	719				

Reference order ⬟ ● ■ ▼ 20117.01.TR.XX.XX.ST.9.XX.XX

MARTORELL TÁRREGA SQ	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	20116	.01	●	LED	.25 .38	.ST	.9	.27	659	10	500	.DA .PU .D1	
								.30	691				
								.40	719				

Reference order ⬟ ● ■ ▼ 20116.01.TR.XX.XX.ST.9.XX.XX

● Select finishes



• FINISHES

EXTERNAL COLOR



INTERNAL COLOR



DIMENSIONS

⬟ View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE

25º | 38º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White



.TR

TRIMLESS

INSTALLATIONS



MARTORELL
TÁRREGA | TÁRREGA SQ

REF 20117.TR | 20116.TR




.RF
RECESSED FRAME

·20117 TARREGA | RF ·20116 TARREGA SQ | RF
Pag. 175


.TR
RECESSED FRAME


·20117 TARREGA | TR ·20116 TARREGA SQ | TR
Pag. 175

PHOTOMETRY




25º 38º

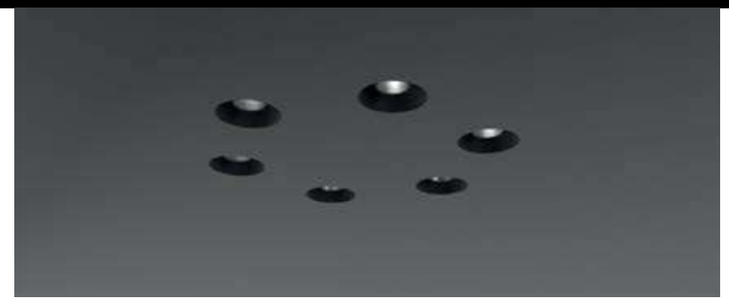

SASSY	REF.	DIMENSIONS ⬟	FINISHES ●	SKETCH
	410002	.01	.WH.WH .BK-BK	

Reference order | 410002.01.TR.XX

SASSY LED	REF.	DIMEN-SIONS ⬟	FINISHES ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	120001	.01	.BK-BK	.15 .26 .38 .50	.ST	.9	.27	1008	10	250	.DA .PU .D1	
							.30	1064				
							.40	1128				
					.MD	.9	.27	1188	12	300	.DA .PU .D1	
							.30	1254				
							.40	1329				
					.HI	.9	.27	1354	15	350	.DA .PU .D1	
							.30	1429				
							.40	1515				
					.DW		.DW				.DA	

Reference order | 120001.01.BK-BK.XX.XX.X.XX.XX

• FINISHES

EXTERNAL COLORS

INTERNAL COLORS

DIMENSIONS

⬟ View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE

15º | 26º | 38º | 50º

POWER

STANDARD | MID | HI

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | DW

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White

new



.TR

TRIMLESS

INSTALLATIONS



SASSY

REF 410002.TR

PHOTOMETRY



26º 38º 50º

.RF
RECESSED FRAME

·410002 SASSY | RF
Pag. 175

.TR
TRIMLESS

·410002 SASSY | TR
Pag. 175

COMPONENTS

RING PART	FINISH ●
	.BK-BK .CH-CH .WH-WH .MS-MS .GF-GF
ACC410002.RR	

Reference order | ACC410002.RR.XX ●


RING PART			FINISH ●
			.BK-BK .WH-WH .BK-WH
ACC410002.TBR	ACC410002.OVR	ACC410002.CFR	

Reference order | ACC410002.XX.XX ●

ACCESORIES

OVAL FLOOD LENS	REF.	LENSE EFFECT ■	SKETCH
	ACC410002.OV	.03X60	
		.10X60	
		.10X40	
		.15X60	

Reference order | ACC410002.OV.XX ■

FLOOD LENS	REF.	LENSE EFFECT ■	SKETCH
	ACC410002	.ZSX1.3	
		.ZSX1.5	
		.ZSX2	
		.ZSX3	

Reference order | ACC410002.XX ■

HONEYCOMB

ACC410002.HC



● Select finish





SASSY


REF 410002.TR

.RF
RECESSED FRAME


·410002 SASSY | RF
Pag. 175

.TR
TRIMLESS

·410002 SASSY | TR
Pag. 175

SASSY	REF.	DIMENSIONS ⬟	FINISHES ●	SKETCH
	410003	.01	●	

Reference order | ⬟ ● 410003.01.TR.XX

SASSY LED	REF.	DIMEN-SIONS ⬟	FINISHES ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	120001	.01	.BK-BK	.15 .26 .38 .50	.ST	.9	.27	1008	10	250	.DA .PU .D1	
							.30	1064				
							.40	1128				
					.MD	.9	.27	1188	12	300	.DA .PU .D1	
							.30	1254				
							.40	1329				
					.HI	.9	.27	1354	15	350	.DA .PU .D1	
							.30	1429				
							.40	1515				
					.DW		.DW				.DA	

Reference order | ⬟ ● ■ ▼ 120001.01.BK-BK.XX.XX.X.XX.XX

• FINISHES

EXTERNAL COLORS

INTERNAL COLORS

DIMENSIONS

⬟ View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE

15º | 26º | 38º | 50º

POWER

STANDARD | MID | HI

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | DW

▼ DIMMABLE OPTIONS


DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White

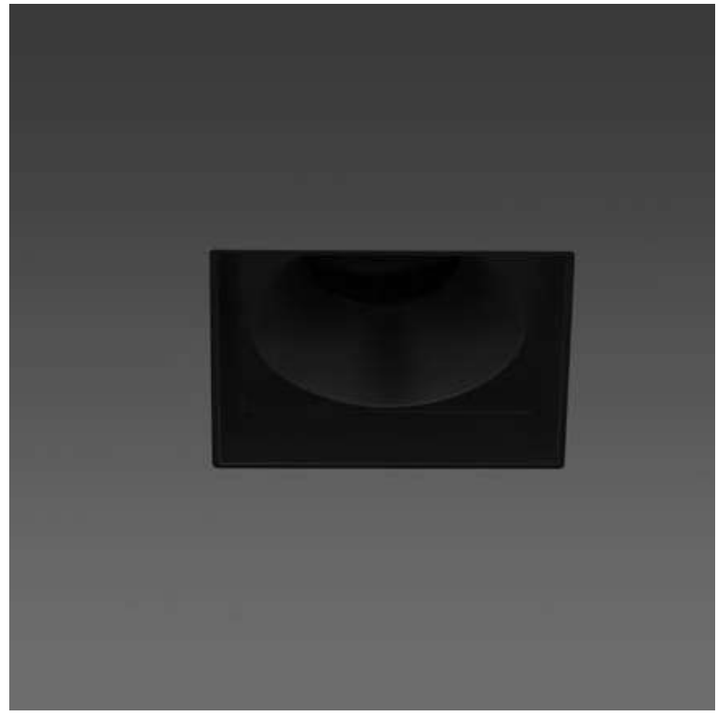

.TR

TRIMLESS

INSTALLATIONS

ALUMINIUM PC | 0° | 0° | CRI ≥90 | IK06 | IP20 IP43 | LIFE 50000H | DIM OPTIONAL | INTEGRATED | INDOOR | 220-240 V 50-60 Hz | CE

SASSY SQ

REF 410003.TR

.RF
RECESSED FRAME

·410003 SASSY SQ | RF
Pag. 175


.TR
TRIMLESS

·410003 SASSY SQ | TR
Pag. 175

PHOTOMETRY



26º 38º 50º

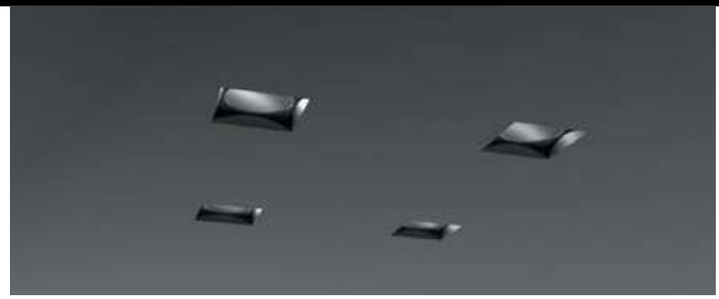


COMPONENTS

RING PART	FINISH ●
	.BK-BK .CH-CH .WH-WH .MS-MS .GF-GF
ACC410003.SQR	

Reference order | ACC410003.SQR.XX ●

ACCESORIES

OVAL FLOOD LENS	REF.	LENSE EFFECT ■	SKETCH
	ACC410003.OV	.03X60	
		.10X60	
		.10X40	
		.15X60	

FLOOD LENS	REF.	LENSE EFFECT ■	SKETCH
	ACC410003	.ZSX1.3	
		.ZSX1.5	
		.ZSX2	
		.ZSX3	

HONEYCOMB

ACC410003.HC

Reference order | ACC410003.OV.XX ■

Reference order | ACC410003.XX ■




● Select finish






SASSY
SQ


REF 410003.TR

CUBE SQ	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	8201	.01	●	LED	.20 .40 .60	.ST	.9	.27	738	11	350	.DA .PU .D1	
								.30	862				
								.40	929				

Reference order ⬟ ● ■ ▼ 8201.01.TR.XX.XX.ST.9.XX.XX

CUBE SQ2	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	8202	.01	●	LED	.20 .40 .60	.ST	.9	.27	1476	22	350	.DA .PU .D1	
								.30	1724				
								.40	1857				

Reference order ⬟ ● ■ ▼ 8202.01.TR.XX.XX.ST.9.XX.XX

CUBE SQ3	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	8203	.01	●	LED	.20 .40 .60	.ST	.9	.27	2214	33	350	.DA .PU .D1	
								.30	2586				
								.40	2786				

Reference order ⬟ ● ■ ▼ 8203.01.TR.XX.XX.ST.9.XX.XX

● Select external - internal finishes



• FINISHES

EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ View in family specifications

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

24º | 40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options



INSTALLATIONS



CUBE
SQ | SQ2 | SQ3

REF 8201.TR | REF 8202.TR | REF 8203.TR



.SR
SURFACE

·8201 CUBE ·8202 CUBE 2 ·8203 CUBE 3 | SR
Pag. 175

.RF
RECESSED FRAME


·8201 CUBE ·8202 CUBE 2 ·8203 CUBE 3 | RF
Pag. 175


.TR
TRIMLESS

·8201 CUBE ·8202 CUBE 2 ·8203 CUBE 3 | TR
Pag. 175


PHOTOMETRY



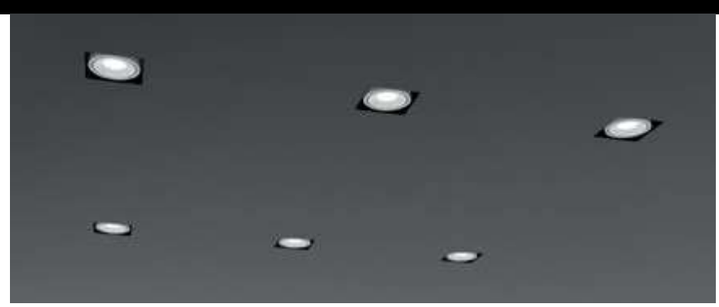


GRAN CUBE SQ	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	8201	.02	●	LED	.20 .40 .60	.ST	.9	.27	1242	19	500	.DA .PU .D1	
								.30	1345				
								.40	1867				

Reference order ⬟ ● ■ ▼ 8201.02.TR.XX.XX.ST.9.XX.XX

GRAN CUBE SQ2	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	8202	.02	●	LED	.20 .40 .60	.ST	.9	.27	2484	38	500	.DA .PU .D1	
								.30	2690				
								.40	3734				

Reference order ⬟ ● ■ ▼ 8202.02.TR.XX.XX.ST.9.XX.XX

GRAN CUBE SQ3	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	8203	.02	●	LED	.20 .40 .60	.ST	.9	.27	3726	58	500	.DA .PU .D1	
								.30	4035				
								.40	5601				

Reference order ⬟ ● ■ ▼ 8203.02.TR.XX.XX.ST.9.XX.XX

● Select external - internal finishes



• FINISHES

EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ View in family specifications

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

24º | 40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options



INSTALLATIONS

.SR
SURFACE


·8201 CUBE ·8202 CUBE 2 ·8203 CUBE 3 | SR
Pag. 175

.RF
RECESSED FRAME

·8201 CUBE ·8202 CUBE 2 ·8203 CUBE 3 | RF
Pag. 175

.TR
TRIMLESS

·8201 CUBE ·8202 CUBE 2 ·8203 CUBE 3 | TR
Pag. 175




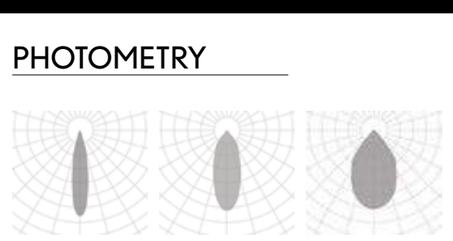


GRAN CUBE
SQ | SQ2 | SQ3

REF 8201.TR | REF 8202.TR | REF 8203.TR

PHOTOMETRY



LENT MODULAR	REF.	DIMEN-SIONS ⬟	SHAPE ◗	FINISHES ●	LAMP	OPTIC OPTIONS ■	POW-ER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	10216	.01	.RO .SQ	●	LED	.20 .40 .60	.ST	.9	.27	142	2	350	.DA .PU .D1	
									.30	161				
									.40	212				
	10216	.03	.RO .SQ	●	LED	.20 .40 .60	.ST	.9	.27	426	6	350	.DA .PU .D1	
									.30	483				
									.40	635				
	10216	.05	.RO .SQ	●	LED	.20 .40 .60	.ST	.9	.27	710	10	350	.DA .PU .D1	
									.30	805				
									.40	1060				
	10216	.10	.RO .SQ	●	LED	.20 .40 .60	.ST	.9	.27	1420	20	350	.DA .PU .D1	
									.30	1611				
									.40	2120				

Reference order | 10216.XX.TR.XX.XX.XX.ST.9.XX.XX

● Select finishes





ROUND .RO
26x29,3 mm
Int Ø14,5 - Ext. Ø23 mm

SQUARE .SQ
26x29,3 mm
Ø14,5 mm

• FINISHES

EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ View in family specifications

.01 | .03 | .05 | .10

LIGHTING OPTIONS

■ BEAM ANGLE

20º | 40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS


DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White

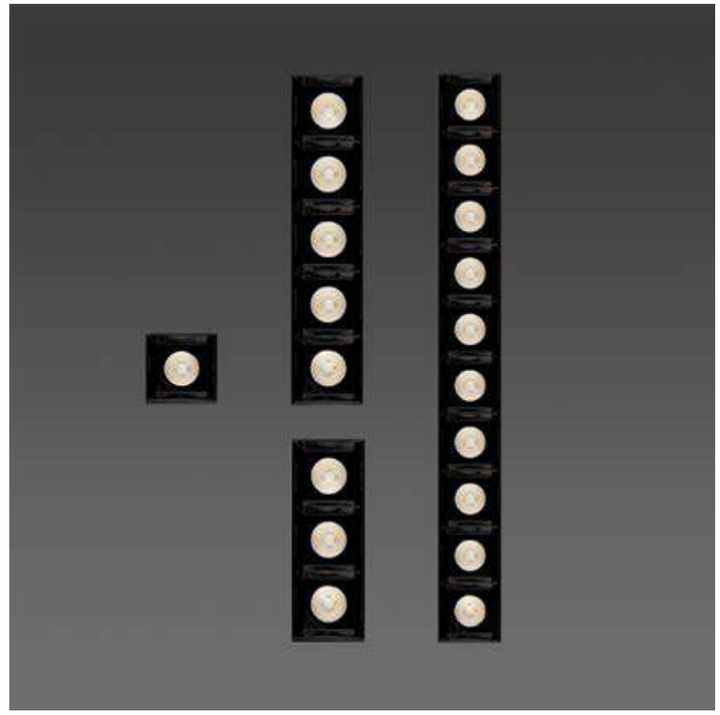

.TR

TRIMLESS

INSTALLATIONS



LENT MODULAR

REF 10216.TR



.RF
RECESSED FRAME

·10216 LENT MODULAR | RF
Pag. 175

.TR
TRIMLESS

·10216 LENT MODULAR | TR
Pag. 175

PHOTOMETRY





20º 40º 60º




SQUARE | SQ



ROUND | RD

LUK FREIR	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	**20018**	**.01**	●	**LED**	**.18 .40 .60**	**.ST**	**.9**	**.27**	830	9	350	**.DA .PU .D1**	
								.30	845				
								.40	895				
	**20018**	**.02**	●	**LED**	**.24 .40 .60**	**.ST**	**.9**	**.27**	1271	16	500	**.DA .PU .D1**	
								.30	1616				
								.40	1682				

Reference order | 20018XX.TR.XX.XX.ST.9.XX.XX

LUK FREIR 2	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	**20019**	**.01**	●	**LED**	**.18 .40 .60**	**.ST**	**.9**	**.27**	1660	18	350	**.DA .PU .D1**	
								.30	1690				
								.40	1790				
	**20019**	**.02**	●	**LED**	**.24 .40 .60**	**.ST**	**.9**	**.27**	1271	16	500	**.DA .PU .D1**	
								.30	1616				
								.40	1682				

● Select finishes



Reference order | 20019.XX.TR.XX.XX.ST.9.XX.XX

• FINISHES

COLORS

DIMENSIONS

⬟ View in family specifications

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

18º 40º 60º | 24º 40º 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options



.TR

TRIMLESS

INSTALLATIONS



LUK
FREIR | FREIR 2

REF 20018.TR | REF 20019.TR

.SR
SURFACE

·20018 LUK FREIR ·20019 LUK FREIR 2 | SR
Pag. 175

.RF
RECESSED FRAME

·20018 LUK FREIR ·20019 LUK FREIR 2 | RF
Pag. 175

.TR
TRIMLESS

·20018 LUK FREIR ·20019 LUK FREIR 2 | TR
Pag. 175

PHOTOMETRY



The invisible star

El protagonista invisible

Style your spaces with even, harmonious light, where luminaries go virtually unnoticed. That's the secret of success of Structural / Crismosil. Say goodbye to wall lights, joins and superfluous items and let the light take centre stage.

Conseguir ambientes con una perfecta luz difusa, armoniosa, obviando la visibilidad de las luminarias. Así consigue Structural / Crismosil su objetivo. Se prescinde de apliques, juntas y todo lo superfluo para para dar todo el protagonismo a la luz.



STRUCTURAL

TRIMLESS

• FINISHES

□

• DIMENSIONS

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

40º | 60º

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE


2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

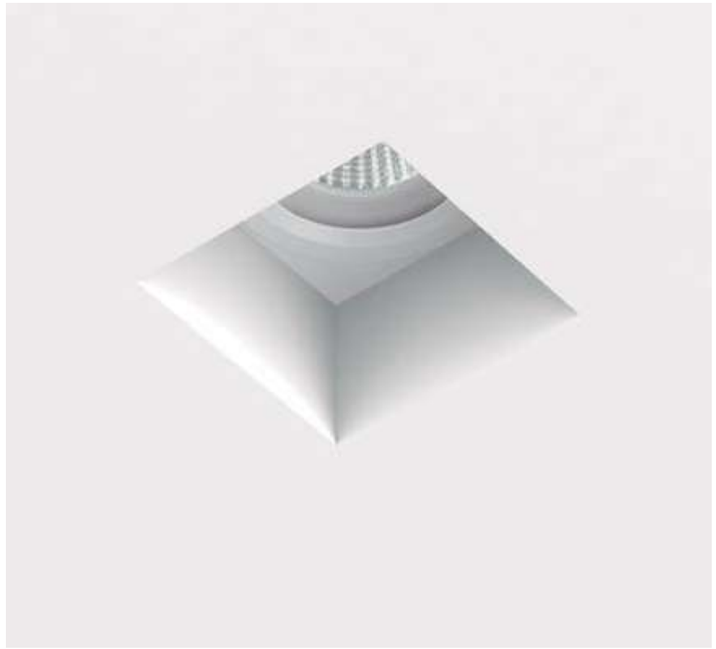

ZENIT SQ	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	BEAM ANGLE ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	30002	.01	.WH-WH	GU5.3	.G5	GU5.3	-			8	-	.DA .PU .D1	125x125 mm / LED94|GU114
				GU10	.GU	GU10							5a-5a 120x120
				LED	.40 .60	.ST BPM50	.9	.27	526	7	350		
								.30	570				
								.40	711				
						.HI BPM300		.27	707	10	500		
								.30	927				
								.40	635				

7 - 22 mm * Espesor del falso techo / Ceiling thickness

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order | 30002.XX.TR.XX.XX.XX.X.XX.XX



ZENIT SQ


REF 30002.TR

PHOTOMETRY



40º 60º

Altura interna- *Internal height*



• FINISHES

□

• DIMENSIONS

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

40º | 60º

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN



ZENIT	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	BEAM ANGLE ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10123	.01	.WH-WH	GU5.3	.G5	GU5.3	-			8	-	.DA .PU .D1	Ø135 mm / LED92|GU112
				GU10	.GU	GU10							Ø52 Ø130
				LED	.40 .60	.ST BPM50	.9	.27	526	7	350		
								.30	570				
								.40	711				
						.HI BPM300		.27	707	10	500		
								.30	927				
								.40	635				

7 - 22 mm * Espesor del falso techo / Ceiling thickness

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order | 10123.XX.TR.XX.XX.XX.X.XX.XX



ZENIT


REF 10123.TR

PHOTOMETRY



40º 60º

Altura interna- *Internal height*



• FINISHES

□

• DIMENSIONS

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

40º | 60º

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE


2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ZENIT DEEP	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	BEAM ANGLE ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	30004	.01	.WH-WH	GU5.3	.G5	GU5.3	-			8	-	.DA .PU .D1	Ø135 mm LED112|GU132  Ø80 Ø130
				GU10	.GU	GU10							
				LED	.40 .60	.ST BPM50	.9	.27	526	7	350		
								.30	570				
								.40	711				
						.HI BPM300		.27	707	10	500		
								.30	927				
								.40	635				

7 - 22 mm * Espesor del falso techo Ceiling thickness

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order | 30004.XX.TR.XX.XX.XX.X.XX.XX



ZENIT
DEEP


REF 30004.TR

PHOTOMETRY



40º 60º

Altura interna- *Internal height*



• FINISHES

□

• DIMENSIONS

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

40º | 60º

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K


▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN



ZENIT DEEP TWINS	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	BEAM ANGLE ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	30005	.01	.WH-WH	GU5.3	.G5	GU5.3	-			8	-	.DA .PU .D1	325x165 mm LED112|GU132  160 320 Ø80 160
				GU10	.GU	GU10							
				LED	.40 .60	.ST BPM50	.9	.27	1052	14	350		
								.30	1140				
								.40	1422				
						.HI BPM300		.27	1414	20	500		
								.30	1854				
								.40	1270				

7 - 22 mm * Espesor del falso techo Ceiling thickness

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order | 30005.XX.TR.XX.XX.XX.X.XX.XX



ZENIT
DEEP TWINS


REF 30005.TR

PHOTOMETRY



40º 60º

Altura interna- *Internal height*



• FINISHES

□

• DIMENSIONS

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

40º | 60º

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K


▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN



ZENIT ORTO	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	BEAM ANGLE ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10126	.01	.WH-WH	GU5.3	.G5	GU5.3	-			8	-	.DA .PU .D1	Ø140 mm LED102|GU122
				GU10	.GU	GU10							 Ø75 Ø135
				LED	.40 .60	.ST BPM50	.9	.27	526	7	350		
								.30	570				
								.40	711				
						.HI BPM300		.27	707	10	500		
								.30	927				
								.40	635				

7 - 22 mm * Espesor del falso techo Ceiling thickness

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order | 10126.XX.TR.XX.XX.XX.X.XX.XX



ZENIT ORTO


REF 10126.TR

PHOTOMETRY



40º 60º

Altura interna- *Internal height*



• FINISHES

□

• DIMENSIONS

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

40º | 60º

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE


2700K | 3000K | 4000K


▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

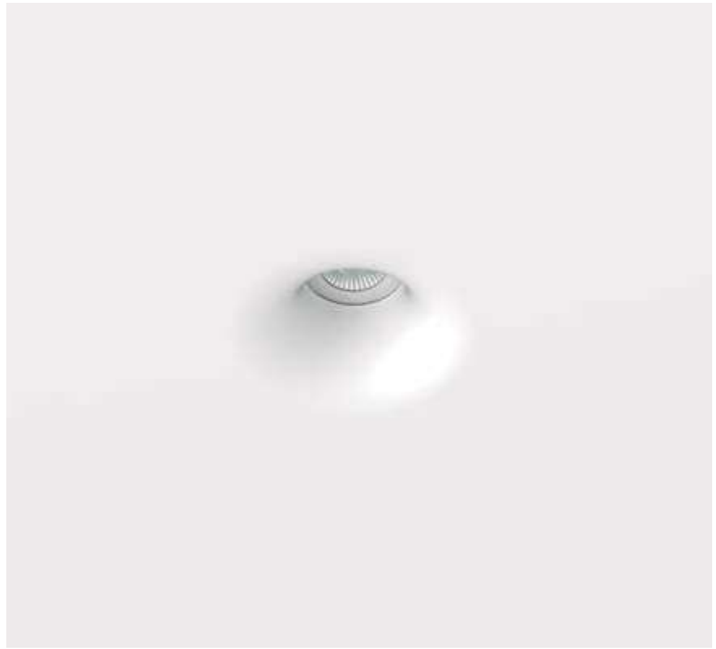

ZENIT SIDEREA	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	BEAM ANGLE ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10050	.01	.WH-WH	GU5.3	.G5	GU5.3	-			8	-	.DA .PU .D1	140X140 mm LED110 | GU130
				GU10	.GU	GU10							 Ø52 135x135
				LED	.40 .60	.ST BPM50	.9	.27	526	7	350		
								.30	570				
								.40	711				
						.HI BPM300		.27	707	10	500		
								.30	927				
								.40	635				

7 - 22 mm * Espesor del falso techo Ceiling thickness

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order | 10050.XX.TR.XX.XX.XX.X.XX.XX



ZENIT SIDEREA


REF 10050.TR

PHOTOMETRY



40º 60º

Altura interna- *Internal height*



• FINISHES

□

• DIMENSIONS

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

40º | 60º

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN



ZENIT MOVE	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	BEAM ANGLE ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10125	.01	.WH-WH	GU5.3	.G5	GU5.3	-			8	-		Ø145 mm / LED92|GU117
				GU10	.GU	GU10							
				LED	.40 .60	.ST BPM50	.9	.27	526	7	350	.DA .PU .D1	Ø90 / Ø140
								.30	570				
								.40	711				

7 - 22 mm * Espesor del falso techo / Ceiling thickness

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order | 10125.XX.TR.XX.XX.XX.X.XX.XX



ZENIT MOVE


REF 10125.TR

PHOTOMETRY



40º 60º

Altura interna- *Internal height*



• FINISHES

□

• DIMENSIONS

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

40º | 60º

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN



ZENIT MOVE SQ	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	BEAM ANGLE ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10125	.01	.WH-WH	GU5.3	.G5	GU5.3	-			8	-		145x145 mm / LED92 | GU117
				GU10	.GU	GU10							
				LED	.40 .60	.ST BPM50	.9	.27	526	7	350	.DA .PU .D1	80x80 / 140x140
								.30	570				
								.40	711				

7 - 22 mm * Espesor del falso techo / Ceiling thickness

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order | 30003.XX.TR.XX.XX.XX.X.XX.XX



ZENIT MOVE SQ


REF 30003.TR

PHOTOMETRY



40º 60º

Altura interna- *Internal height*



• FINISHES

□

• DIMENSIONS

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

40º | 60º

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS


DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN



Puede fijarse en cualquier posición desde empotrado hasta 35mm de saliente.
It can be mounted in any position from recessed up to 35mm protruding.

ZENIT ZUBIA	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	BEAM ANGLE ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10122	.01	.WH-WH	GU5.3	.G5	GU5.3	-			8	-		145x145 mm LED98|GU118
				GU10	.GU	GU10							 140x140 Ø56
				LED	.40 .60	.ST BPM50	.9	.27	526	7	350	.DA .PU .D1	
								.30	570				
								.40	711				
						.HI BPM300		.27	707	10	500		
								.30	927				
								.40	635				

7 - 22 mm * Espesor del falso techo
Ceiling thickness

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order | 10122.01.TR.XX.XX.XX.X.XX.XX

CRISMOSIL · 0° · 0° · CRI ≥90 · IK06 · IP20 IP43 · LIFE 50000H · DIM OPTIONAL · INTEGRATED · INDOOR · 220-240 V 50-60 Hz · CE

ZENIT
ZUBIA


REF 10122.TR

PHOTOMETRY



40º 60º

Altura interna- *Internal height*



• FINISHES

□

• DIMENSIONS

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

40º | 60º

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS


DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN



Puede fijarse en cualquier posición desde empotrado hasta 35mm de saliente.
It can be mounted in any position from recessed up to 35mm protruding.

ZENIT ZUBIASQ	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	BEAM ANGLE ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10121	.01	.WH-WH	GU5.3	.G5	GU5.3	-			8	-		145x145 mm LED98 | GU118
				GU10	.GU	GU10							 140x140 56x56
				LED	.40 .60	.ST BPM50	.9	.27	526	7	350	.DA .PU .D1	
								.30	570				
								.40	711				
						.HI BPM300		.27	707	10	500		
								.30	927				
								.40	635				

7 - 22 mm * Espesor del falso techo
Ceiling thickness

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order | 10121.01.TR.XX.XX.XX.X.XX.XX

CRISMOSIL · 0° · 0° · CRI ≥90 · IK06 · IP20 IP43 · LIFE 50000H · DIM OPTIONAL · INTEGRATED · INDOOR · 220-240 V 50-60 Hz · CE

ZENIT
ZUBIA SQ


REF 10121.TR


PHOTOMETRY





40º 60º

Altura interna- *Internal height*



SUNSET	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	BEAM ANGLE ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10124	.01	●	GU5.3	.G5	GU5.3	-			8	-		Ø1155 LEDXX|GUXX  Ø150
				GU10	.GU	GU10							
				LED	.40 .60	.ST BPM50	.9	.27	526	7	350	.DA .PU .D1	
								.30	570				
								.40	711				
						.HI BPM300		.27	707	10	500		
								.30	927				
								.40	635				

SUNSET	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	BEAM ANGLE ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10124	.02	●	GU5.3	.G5	GU5.3	-			8	-		205x205 mm LEDXX|GUXX  200x200
				GU10	.GU	GU10							
				LED	.40 .60	.ST BPM50	.9	.27	526	7	350	.DA .PU .D1	
								.30	570				
								.40	711				
						.HI BPM300		.27	707	10	500		
								.30	927				
								.40	635				

SUNSET	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	BEAM ANGLE ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10124	.03	●	GU5.3	.G5	GU5.3	-			MAX 2x100W	-		403x305 mm LED105 | GU105  425x300
				GU10	.GU	GU10				MAX 2x75W			
				GX8.5	.GX	GX8.5				MAX 2x70W			
				LED	.40 .60	.ST BPM3181	.9	.27	2086	2x16	350	.DA .PU .D1	
								.30	2200				
								.40	2460				

7 - 22 mm **.01** Espesor del falso techo
Ceiling thickness

10 -20 mm **.02 .03** Espesor del falso techo
Ceiling thickness

Con difusor opal.
With opal optic cover.

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order | 10124.XX.TR.XX.XX.XX.X.XX.XX

• FINISHES

□

⬟ DIMENSIONS

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN



TRIMLESS

.TR

● Select finishes




.WH-WH

CRISMOSIL | 0° | 0° | CRI ≥90 | IK06 | IP20 IP43 | LIFE 50000H | DIM OPTIONAL | | INTEGRATED | INDOOR | | | 220-240 V 50-60 Hz | CE

SUNSET


REF 10124.TR

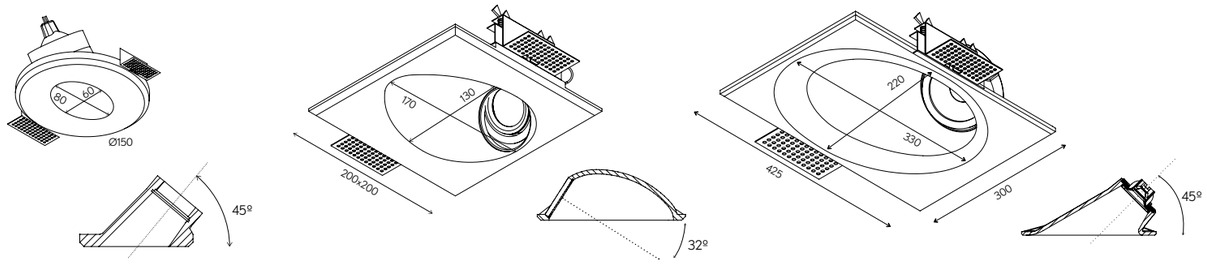



PHOTOMETRY



40º 60º

VOLCANO	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	BEAM ANGLE ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10062	.01	●	GU5.3	.G5	GU5.3	-			8	-		295x295 mm LEDXX|GUXX
				GU10	.GU	GU10							 290x290 Ø108
				LED	.40 .60	.ST BPM50	.9	.27	526	7	350	.DA .PU .D1	
								.30	570				
								.40	711				
						.HI BPM300		.27	707	10	500		
								.30	927				
								.40	635				

VOLCANO	REF.	DIMEN-SIONS	FINISHES ●	LAMP	BEAM ANGLE ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10062	.02	●	LED	.40 .60	.ST BPM3181	.9	.27	1043	16	500	.DA .PU .D1	335x335 mm LEDXX
								.30	1100				 Ø170 330x330
								.40	1230				

VOLCANO	REF.	DIMEN-SIONS	FINISHES ●	LAMP	BEAM ANGLE ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10062	.03	●	LED	.40 .60	.ST	.9	.27	3280	23	500	.DA .PU .D1	650x650 mm LEDX
								.30	3480				
								.40	3640				 40 Ø400 645x645
						.HI		.27	6560	47	500		
								.30	6920				
								.40	7269				

7 - 22 mm * Espesor del falso techo Ceiling thickness

12,5 mm *2 Espesor del falso techo Ceiling thickness

Con difusor opal.
With opal optic cover.

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order | 10062.XX.TR.XX.XX.XX.X.XX.XX

• FINISHES

□

⬟ DIMENSIONS

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

OPAL

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN



.TR

TRIMLESS

• Select finishes



.WH-WH

CRISMOSIL | 0° | 0° | CRI ≥90 | IK06 | IP20 IP43 | LIFE 50000H | DIM OPTIONAL | | INTEGRATED | INDOOR | | | 220-240 V 50-60 Hz | CE


VOLCANO


REF 10062.TR


PHOTOMETRY



40º 60º

VOLCANO DEEP	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	BEAM ANGLE ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10063	.01	●	GU5.3	.G5	GU5.3	-			8	-		295x295 mm LEDXX|GUXXX 
				GU10	.GU	GU10							
				LED	.40 .60	.ST BPM50	.9	.27	526	7	350	.DA .PU .D1	
								.30	570				
								.40	711				
						.HI BPM300		.27	707	10	500		
								.30	927				
								.40	635				

VOLCANO DEEP	REF.	DIMEN-SIONS	FINISHES ●	LAMP	BEAM ANGLE ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10063	.02	●	LED	.40 .60	.ST BPM3181	.9	.27	1043	16	500	.DA .PU .D1	395x395 mm LEDX 
								.30	1100				
								.40	1230				

VOLCANO DEEP	REF.	DIMEN-SIONS	FINISHES ●	LAMP	BEAM ANGLE ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10063	.03	●	LED	.40 .60	.ST	.9	.27	3280	23	500	.DA .PU .D1	650x650 mm LEDX 
								.30	3480				
								.40	3640				
						.HI		.27	6560	47	500		
								.30	6920				
								.40	7269				

7 - 22 mm * Espesor del falso techo Ceiling thickness

12,5 mm *2 Espesor del falso techo Ceiling thickness

Con difusor opal.
With opal optic cover.

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order | 10063.XX.TR.XX.XX.XX.X.XX.XX

• FINISHES

□

⬟ DIMENSIONS

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

OPAL

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN



.TR

TRIMLESS

● Select finishes



.WH-WH



VOLCANO DEEP

REF 10063.TR

PHOTOMETRY



40º 60º

ESPIGA	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	BEAM ANGLE ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10086	.01	●	GU5.3	.G5	GU5.3	-			8	-		180x180 mm LED160 | GU180
				GU10	.GU	GU10							
				LED	.40 .60	.ST BPM50	.9	.27	526	7	350	.DA .PU .D1	175x175 Ø100
								.30	570				
								.40	711				
						.HI BPM300		.27	707	10	500		
								.30	927				
								.40	635				

ESPIGA	REF.	DIMEN-SIONS	FINISHES ●	LAMP	BEAM ANGLE ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10086	.02	●	LED	.40 .60	.ST BPM3181	.9	.27	1043	16	500	.DA .PU .D1	230x230 mm LED140
								.30	1100				225x225 Ø150
								.40	1230				

ESPIGA	REF.	DIMEN-SIONS	FINISHES ●	LAMP	BEAM ANGLE ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10086	.03	●	LED	.40 .60	.ST BPM200	.9	.27	1647	25	600	.DA .PU .D1	280x280 mm LED135
								.30	1700				275x275 Ø200
								.40	2040				

7 - 22 mm * Espesor del falso techo
Ceiling thickness

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order | 10086.XX.TR.XX.XX.XX.X.XX.XX

• FINISHES

□

⬟ DIMENSIONS

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

40º | 60º

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN



TRIMLESS

.TR

● Select finishes




.WH-WH

CRISMOSIL | 0° | 0° | CRI ≥90 | IK06 | IP20 IP43 | LIFE 50000H | DIM OPTIONAL | | INTEGRATED | INDOOR | | | 220-240 V 50-60 Hz | CE

ESPIGA

REF 10086.TR


Altura interna- *Internal height*





PHOTOMETRY



40º 60º

ESPIGA SQ	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	BEAM ANGLE ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10083	.01	●	GU5.3	.G5	GU5.3	-			8	-		170x170 mm · LED160 | GU180  165x165 · 90x90
				GU10	.GU	GU10							
				LED	.40 .60	.ST BPM50	.9	.27	526	7	350	.DA .PU .D1	
								.30	570				
								.40	711				
						.HI BPM300		.27	707	10	500		
								.30	927				
								.40	635				

ESPIGA SQ	REF.	DIMEN-SIONS	FINISHES ●	LAMP	BEAM ANGLE ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10083	.02	●	LED	.40 .60	.ST BPM3181	.9	.27	1043	16	500	.DA .PU .D1	220x220 mm · LED140  215x215 · 140x140
								.30	1100				
								.40	1230				

ESPIGA SQ	REF.	DIMEN-SIONS	FINISHES ●	LAMP	BEAM ANGLE ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10083	.03	●	LED	.40 .60	.ST BPM200	.9	.27	1647	25	600	.DA .PU .D1	270x270 mm · LED135  265x265 · 190x190
								.30	1700				
								.40	2040				

7 - 22 mm * Espesor del falso techo Ceiling thickness

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order | 10083.XX.TR.XX.XX.XX.X.XX.XX

• FINISHES

□

• DIMENSIONS

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

40º | 60º

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN



TRIMLESS .TR

● Select finishes




.WH-WH

CRISMOSIL · 0° · 0° · CRI ≥90 · IK06 · IP20 IP43 · LIFE 50000H · DIM OPTIONAL · INTEGRATED · INDOOR · 220-240 V 50-60 Hz · CE

ESPIGA SQ

REF 10083.TR


Altura interna- *Internal height*





PHOTOMETRY



40º 60º

ESPIGA SIRIO	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	BEAM ANGLE ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10077	.01	●	GU5.3	.G5	GU5.3	-			8	-		250x250 mm LED160 | GU180
				GU10	.GU	GU10							
				LED	.40 .60	.ST BPM50	.9	.27	526	7	350	.DA .PU .D1	
								.30	570				
								.40	711				
						.HI BPM300		.27	707	10	500		
								.30	927				
								.40	635				

ESPIGA SIRIO	REF.	DIMEN-SIONS	FINISHES ●	LAMP	BEAM ANGLE ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10077	.02	●	LED	.40 .60	.ST BPM3181	.9	.27	1043	16	500	.DA .PU .D1	300x300 mm LED140
								.30	1100				
								.40	1230				

ESPIGA SIRIO	REF.	DIMEN-SIONS	FINISHES ●	LAMP	BEAM ANGLE ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10077	.03	●	LED	.40 .60	.ST BPM200	.9	.27	1647	25	600	.DA .PU .D1	350x350 mm LED135
								.30	1700				
								.40	2040				

7 - 22 mm * Espesor del falso techo
Ceiling thickness

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order | 10077.XX.TR.XX.XX.XX.X.XX.XX

• FINISHES

□

⬟ DIMENSIONS

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

40º | 60º

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN



.TR

TRIMLESS

● Select finishes




.WH-WH

CRISMOSIL | 0° | 0° | CRI ≥90 | IK06 | IP20 IP43 | LIFE 50000H | DIM OPTIONAL | | INTEGRATED | INDOOR | | | 220-240 V 50-60 Hz | CE

ESPIGA
SIRIO

REF 10077.TR

Altura interna- *Internal height*




PHOTOMETRY



40º



60º

ESPIGA SIRIO TWINS	REF.	DIMEN-SIONS	FINISHES ●	LAMP	BEAM ANGLE ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	30000	.01	●	LED	.40 .60	.ST	.9	.27	3280	23	500	.DA .PU .D1	
								.30	3480				
								.40	3640				
						.HI		.27	6560	47	500		
								.30	6920				
								.40	7269				

10 - 20 mm * Espesor del falso techo
Ceiling thickness

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order | 30000.01.TR.XX.XX.XX.X.XX.XX

• FINISHES

□

• DIMENSIONS

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

40º | 60º

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN



.TR

TRIMLESS

● Select finishes




.WH-WH



ESPIGA
SIRIO TWINS

REF 30000.TR

Altura interna- *Internal height*



PHOTOMETRY



40º 60º

ESPIGA ORIONIS	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	BEAM ANGLE ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10080	.01	●	GU5.3	.G5	GU5.3	-			8	-		245x245 mm / LED160 | GU180
				GU10	.GU	GU10							
				LED	.40 .60	.ST BPM50	.9	.27	526	7	350	.DA .PU .D1	24 / 0x240 / 90x90
								.30	570				
								.40	711				
						.HI BPM300		.27	707	10	500		
								.30	927				
								.40	635				

ESPIGA ORIONIS	REF.	DIMEN-SIONS	FINISHES ●	LAMP	BEAM ANGLE ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10080	.02	●	LED	.40 .60	.ST BPM3181	.9	.27	1043	16	500	.DA .PU .D1	305x305 mm / LED140 / 300x300 / 140x140
								.30	1100				
								.40	1230				

ESPIGA ORIONIS	REF.	DIMEN-SIONS	FINISHES ●	LAMP	BEAM ANGLE ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10080	.03	●	LED	.40 .60	.ST BPM200	.9	.27	1647	25	600	.DA .PU .D1	345x345 mm / LED135 / 340x340 / 190x190
								.30	1700				
								.40	2040				

10 - 20 mm * Espesor del falso techo
Ceiling thickness

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order | 10080.XX.TR.XX.XX.XX.X.XX.XX

• FINISHES

□

⬟ DIMENSIONS

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

40º | 60º

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN



.TR

TRIMLESS

● Select finishes




.WH-WH

CRISMOSIL | 0° | 0° | CRI ≥90 | IK06 | IP20 IP43 | LIFE 50000H | DIM OPTIONAL | | INTEGRATED | INDOOR | | | 220-240 V 50-60 Hz | CE

ESPIGA ORIONIS

REF 10080.TR


Altura interna- *Internal height*



PHOTOMETRY



40º 60º

ESPIGA ORIONIS TWINS	REF.	DIMEN-SIONS	FINISHES ●	LAMP	BEAM ANGLE ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	30001	.01	●	LED	.40 .60	.ST	.9	.27	-	20	500	.DA .PU .D1	650x650 mm LED160 
								.30	3040				
								.40	3180				
						.HI		.27	-	41	500		
								.30	6060				
								.40	6360				

10 - 20 mm * Espesor del falso techo
Ceiling thickness

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order | 30001.01.TR.XX.XX.XX.X.XX.XX

• FINISHES

□

• DIMENSIONS

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

40º | 60º

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN



.TR

TRIMLESS

● Select finishes




.WH-WH



ESPIGA
ORIONIS TWINS

REF 30001.TR

Altura interna- *Internal height*





PHOTOMETRY



40º

60º

VEGA ADHARA	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	BEAM ANGLE ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10016	.01	●	GU5.3	.G5	GU5.3	-			8	-		215x215 mm · LED97|GU117
				GU10	.GU	GU10							
				LED	.40 .60	.ST BPM50	.9	.27	526	7	350	.DA .PU .D1	
								.30	570				
								.40	711				
						.HI BPM300		.27	707	10	500		
								.30	927				
								.40	635				

VEGA ADAHARA	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	BEAM ANGLE ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10016	.02	●	GU5.3	.G5	GU5.3	-			MAX 100W	-		305x305mm · LED105 | GU105
				GU10	.GU	GU10				MAX 75W			
				GX8.5	.GX	GX8.5				MAX 70W			
				LED	.40 .60	.ST BPM3181	.9	.27	1043	16	350	.DA .PU .D1	
								.30	1100				
								.40	1230				

10 - 20 mm * Espesor del falso techo Ceiling thickness

13 mm * Espesor del falso techo Ceiling thickness

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order ⬟ ● ■ ▼

10016.XX.TR.XX.XX.XX.X.XX.XX

• FINISHES

□

• DIMENSIONS

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

40º | 60º

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN



.TR

TRIMLESS

• Select finishes




.WH-WH



VEGA ADHARA

REF 10016.TR


Altura interna- *Internal height*




PHOTOMETRY



40º 60º

VEGA ADHARA TWINS	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	BEAM ANGLE ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10066	.01	●	GU5.3	.G5	GU5.3	-			MAX. 2x50W	-		310x215 mm LED97|GU117
				GU10	.GU	GU10							
				LED	.40 .60	.ST BPM50	.9	.27	1052	2x7	350	.DA .PU .D1	
								.30	1140				
								.40	1422				
						.HI BPM300		.27	1414	2x10	500		
								.30	1854				
								.40	1270				

VEGA ADHARA TWINS	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	BEAM ANGLE ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10066	.02	●	GU5.3	.G5	GU5.3	-			MAX 2x100W	-		485x305 mm LED105 | GU105
				GU10	.GU	GU10				MAX 2x75W			
				GX8.5	.GX	GX8.5				MAX 2x70W			
				LED	.40 .60	.ST BPM3181	.9	.27	2086	2x16	350	.DA .PU .D1	
								.30	2200				
								.40	2460				

10 - 20 mm * Espesor del falso techo Ceiling thickness

13 mm * Espesor del falso techo Ceiling thickness

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order ⬟ ● ■ ▼

10066.XX.TR.XX.XX.XX.X.XX.XX

• FINISHES

□

⬟ DIMENSIONS

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

40º | 60º

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN



.TR

TRIMLESS

VEGA
ADHARA TWINS
REF 10066.TR


● Select finishes



.WH-WH




Altura interna- *Internal height*




PHOTOMETRY



40º 60º

VEGA	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	BEAM ANGLE ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10028	.01	●	GU5.3	.G5	GU5.3	-			8	-		165x165 mm · LED97|GU117
				GU10	.GU	GU10							 160x160 · 93x93
				LED	.40 .60	.ST BPM50	.9	.27	526	7	350	.DA .PU .D1	
								.30	570				
								.40	711				
						.HI BPM300		.27	707	10	500		
								.30	927				
								.40	635				

VEGA	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	BEAM ANGLE ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10028	.02	●	GU5.3	.G5	GU5.3	-			MAX 100W	-		170x170 mm · LED105 | GU105
				GU10	.GU	GU10				MAX 75W			 165 · 165
				GX8.5	.GX	GX8.5				MAX 70W			
				LED	.40 .60	.ST BPM3181	.9	.27	1043	16	350	.DA .PU .D1	
								.30	1100				
								.40	1230				

10 - 20 mm * Espesor del falso techo Ceiling thickness

13 mm * Espesor del falso techo Ceiling thickness

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order ⬟ ● ■ ▼

10028.XX.TR.XX.XX.XX.X.XX.XX

• FINISHES

□

• DIMENSIONS

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

40º | 60º

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN



VEGA

REF 10028.TR

• Select finishes

.WH-WH


CRISMOSIL · 0° · 0° · CRI ≥90 · IK06 · IP20 · IP43 · LIFE 50000H · DIM OPTIONAL · INTEGRATED · INDOOR · 220-240 V 50-60 Hz · CE

PHOTOMETRY



40º 60º

Altura interna- *Internal height*





PHOTOMETRY




40º 60º

Altura interna- *Internal height*



VEGA TWINS	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	BEAM ANGLE ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10070	.01	●	GU5.3	.G5	GU5.3	-			MAX. 2x50W	-		280x170 mm LED97|GU117
				GU10	.GU	GU10							
				LED	.40 .60	.ST BPM50	.9	.27	1052	2x7	350	.DA .PU .D1	
								.30	1140				
								.40	1422				
						.HI BPM300		.27	1414	2x10	500		
								.30	1854				
								.40	1270				

VEGA TWINS	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	BEAM ANGLE ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10070	.02	●	GU5.3	.G5	GU5.3	-			MAX 2x100W	-		485x305 mm LED105 | GU105
				GU10	.GU	GU10				MAX 2x75W			
				GX8.5	.GX	GX8.5				MAX 2x70W			
				LED	.40 .60	.ST BPM3181	.9	.27	2086	2x16	350	.DA .PU .D1	
								.30	2200				
								.40	2460				

10 - 20 mm * Espesor del falso techo Ceiling thickness

13 mm * Espesor del falso techo Ceiling thickness

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order ⬟ ● ■ ▼

10070.XX.TR.XX.XX.XX.X.XX.XX

• FINISHES

□

• DIMENSIONS

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

40º | 60º

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN



.TR

TRIMLESS

- Select finishes



.WH-WH

CRISMOSIL | 0° | 0° | CRI ≥90 | IK06 | IP20 IP43 | L80B10 50000H | DIM OPTIONAL | | INTEGRATED | INDOOR | | | 220-240 V 50-60 Hz | CE

VEGA TWINS

REF 10070.TR

Altura interna- *Internal height*



PHOTOMETRY



40º 60º

ZETA	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	BEAM ANGLE ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10001	.01	●	GU5.3	.G5	GU5.3	-			8	-		205x205 mm / LED100 | GU120
				GU10	.GU	GU10							
				LED	.40 .60	.ST BPM50	.9	.27	526	7	350	.DA .PU .D1	Ø185 / 200x200
								.30	570				
								.40	711				
						.HI BPM300		.27	707	10	500		
								.30	927				
								.40	635				

10 - 20 mm * Espesor del falso techo
Ceiling thickness

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order | 10001.01.TR.XX.XX.XX.X.XX.XX

• FINISHES

□

⬟ DIMENSIONS

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

40º | 60º

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN



● Select finishes




.WH-WH



VEGA
ZETA
REF 10001.TR

Altura interna- *Internal height*

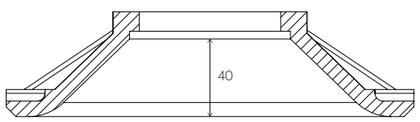

PHOTOMETRY



40º | 60º

VEGA ZETA SQ	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	BEAM ANGLE ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10019	.01	●	GU5.3	.G5	GU5.3	-			MAX 100W	-		225x225 mm LED105|GU105
				GU10	.GU	GU10				MAX 75W			
				GX8.5	.GX	GX8.5				MAX 70W			
				LED	.40 .60	.ST BPM3181	.9	.27	1043	16	350	.DA .PU .D1	
								.30	1100				
								.40	1230				
	10019	.02	●	GU5.3	.G5	GU5.3	-			MAX 100W	-		225x225 mm LED105|GU105
				GU10	.GU	GU10				MAX 75W			
				GX8.5	.GX	GX8.5				MAX 70W			
				LED	.40 .60	.ST BPM3181	.9	.27	1043	16	350	.DA .PU .D1	
								.30	1100				
								.40	1230				
	10019	.03	●	GU5.3	.G5	GU5.3	-			MAX 100W	-		225x225 mm LED105|GU105
				GU10	.GU	GU10				MAX 75W			
				GX8.5	.GX	GX8.5				MAX 70W			
				LED	.40 .60	.ST BPM3181	.9	.27	1043	16	350	.DA .PU .D1	
								.30	1100				
								.40	1230				

10 - 20 mm * Espesor del falso techo
Ceiling thickness

LUMINAIRE INCLUDES

Reference order | 10019.XX.TR.XX.XX.XX.XX.X.XX.XX

• FINISHES

□

• DIMENSIONS

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

40º | 60º

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN



.TR

TRIMLESS

• Select finishes



.WH-WH


CRISMOSIL | 0° | 0° | CRI ≥90 | IK06 | IP20 IP43 | LIFE 50000H | DIM OPTIONAL | | INTEGRATED | INDOOR | | | 220-240 V 50-60 Hz | CE

VEGA ZETA SQ


REF 10019.TR

Altura interna- *Internal height*

10019.01




10019.02



PHOTOMETRY



40º 60º

ZETA SQ TWINS	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	BEAM ANGLE ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10072	.02	●	LED	.40 .60	.ST BPM3181	.9	.27	2086	2x16	350	.DA .PU .D1	390x225 mm LED150 | GU150
								.30	2200				
								.40	2460				
				GU5.3	.G5	GU5.3	-			MAX 2x100W	-		
				GU10	.GU	GU10				MAX 2x75W			
				GX8.5	.GX	GX8.5				MAX 2x70W			

13 mm * Espesor del falso techo
Ceiling thickness

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order ⬟ ● ■ ▼

10070.02.TR.XX.XX.XX.X.XX.XX

• FINISHES

□

⬟ DIMENSIONS

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

40º | 60º

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN



.TR

TRIMLESS

VEGA
ZETA SQ TWINS

REF 10072.TR


• Select finishes



.WH-WH



Altura interna- *Internal height*




PHOTOMETRY





40º



60º

CENTAURO	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	BEAM ANGLE ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10109	.01	●	LED	.15 .24 .40 .60	.ST	.9	.30	790	7	350	.DA .PU .D1	
								.40	796				

CENTAURO	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	BEAM ANGLE ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10109	.02	●	LED	.15 .24 .40 .60	.ST	.9	.30	1840	20	540	.DA .PU .D1	
								.40	2010				

CENTAURO	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	BEAM ANGLE ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10109	.03	●	LED	.15 .24 .40 .60	.ST	.9	.30	3200	40	750	.DA .PU .D1	
								.40	3320				

10 - 20 mm * Espesor del falso techo
Ceiling thickness

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order ⬟ ● ■ ▼

10109.XX.TR.XX.XX.XX.X.XX.XX

• FINISHES

□

⬟ DIMENSIONS

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

OPAL

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN



.TR

TRIMLESS

● Select finishes




.WH-WH



CENTAURO

REF 10109.TR

Altura interna- *Internal height*



PHOTOMETRY



15º 24º 40º 60º

VITA	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	BEAM ANGLE ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	30007	.01	●	LED	.15 .24 .40 .60	.ST	.9	.30	790	7	350	.DA .PU .D1	205x205 mm LEDXX
								.40	796				

VITA	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	BEAM ANGLE ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	30007	.02	●	LED	.15 .24 .40 .60	.ST	.9	.30	1840	20	540	.DA .PU .D1	255x255 mm LEDXX
								.40	2010				

10 - 20 mm * Espesor del falso techo
Ceiling thickness

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order | 30007.XX.TR.XX.XX.XX.X.XX.XX

• FINISHES

□

⬟ DIMENSIONS

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

OPAL

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN



.TR

TRIMLESS

• Select finishes



.WH-WH

CRISMOSIL | 0° | 10° | CRI ≥90 | IK06 | IP20 IP43 | LIFE 50000H | DIM OPTIONAL | INTEGRATED | INDOOR | 220-240 V 50-60 Hz | CE


VITA

REF 30007.TR

PHOTOMETRY



15º 24º 40º 60º

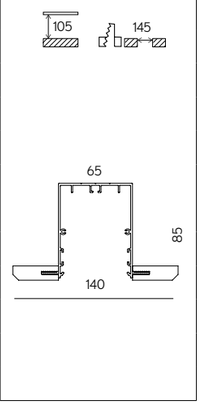IBIZA FLAT	REF.	DIMENSIONS ⬟	MM	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT | LUMEN .27	.30	.40	.TW*2	WATT K	TW	DIMM ▼	SKETCH
	10500	.03	863	●	.OP .MP	.ST	.9	2295	2385	2475	5700-8520	18	38	.DA .PU .D1	
		.04	1144					3060	3180	3300	7600-11360	24	51		
		.05	1425					3825	3975	4125	9500-14200	30	64		
		.06	1706					4590	4770	4950	11400-17040	35	76		
		.07	1987					5355	5565	5775	13300-19880	41	89		
		.08	2268					6120	6360	6600	15200-22720	47	102		
		.03	863			.HI		5472	4767	4956	-	35	-		
		.04	1144					7296	6356	6608	-	47	-		
		.05	1425					9120	7945	8260	-	59	-		
		.06	1706					10944	9534	9912	-	71	-		
		.07	1987					12768	11123	11564	-	83	-		
		.08	2268					14592	12712	13216	-	94	-		

Reference order ⬟ ● ■ ▼

10500.XX.TR.XX.XX.XX.X.XX.XX

IBIZA DEEP WAVE	REF.	DIMENSIONS ⬟	MM	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT | LUMEN .27	.30	.40	.TW*2	WATT K	TW	DIMM ▼	SKETCH
	10501	.03	863	●	.OP .MP	.ST	.9	2295	2385	2475	5700-8520	18	38	.DA .PU .D1	
		.04	1144					3060	3180	3300	7600-11360	24	51		
		.05	1425					3825	3975	4125	9500-14200	30	64		
		.06	1706					4590	4770	4950	11400-17040	35	76		
		.07	1987					5355	5565	5775	13300-19880	41	89		
		.08	2268					6120	6360	6600	15200-22720	47	102		
		.03	863			.HI		5472	4767	4956	-	35	-		
		.04	1144					7296	6356	6608	-	47	-		
		.05	1425					9120	7945	8260	-	59	-		
		.06	1706					10944	9534	9912	-	71	-		
		.07	1987					12768	11123	11564	-	83	-		
		.08	2268					14592	12712	13216	-	94	-		

Reference order ⬟ ● ■ ▼

10501.XX.TR.XX.XX.XX.X.XX.XX

• FINISHES

□

• DIMENSIONS

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

OPAL

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K |

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN



TRIMLESS

.TR

● Select finishes



.WH-WH




IBIZA

REF 10500 | 10501 | 10502 | 10503 | 10504 | 10505.TR

IBIZA DEEP TILT

REF.	⬟	MM	FINISH ●	DIFFUSER ■	POWER	CRI	.27	.30	.40	.TW*2	K	TW	DIMM ▼
10502	.03	863	●	.OP .MP	.ST	.9	2295	2385	2475	5700-8520	18	38	.DA .PU .D1
	.04	1144					3060	3180	3300	7600-11360	24	51	
	.05	1425					3825	3975	4125	9500-14200	30	64	
	.06	1706					4590	4770	4950	11400-17040	35	76	
	.07	1987					5355	5565	5775	13300-19880	41	89	
	.08	2268					6120	6360	6600	15200-22720	47	102	
	.03	863			.HI		5472	4767	4956	-	35	-	
	.04	1144					7296	6356	6608	-	47	-	
	.05	1425					9120	7945	8260	-	59	-	
	.06	1706					10944	9534	9912	-	71	-	
	.07	1987					12768	11123	11564	-	83	-	
	.08	2268					14592	12712	13216	-	94	-	

SKETCH



Reference order ⬟ ● ■ ▼

10502.XX.TR.XX.XX.XX.X.XX.XX

IBIZA WASHER

REF.	⬟	MM	FINISH ●	DIFFUSER ■	POWER	CRI	.27	.30	.40	.TW*2	K	TW	DIMM ▼
10504	.03	863	●	.OP .MP	.ST	.9	2295	2385	2475	5700-8520	18	38	.DA .PU .D1
	.04	1144					3060	3180	3300	7600-11360	24	51	
	.05	1425					3825	3975	4125	9500-14200	30	64	
	.06	1706					4590	4770	4950	11400-17040	35	76	
	.07	1987					5355	5565	5775	13300-19880	41	89	
	.08	2268					6120	6360	6600	15200-22720	47	102	
	.03	863			.HI		5472	4767	4956	-	35	-	
	.04	1144					7296	6356	6608	-	47	-	
	.05	1425					9120	7945	8260	-	59	-	
	.06	1706					10944	9534	9912	-	71	-	
	.07	1987					12768	11123	11564	-	83	-	
	.08	2268					14592	12712	13216	-	94	-	

SKETCH




Reference order ⬟ ● ■ ▼

10504.XX.TR.XX.XX.XX.X.XX.XX

IBIZA EDGE

REF.	⬟	MM	FINISH ●	DIFFUSER ■	POWER	CRI	.27	.30	.40	.TW*2	K	TW	DIMM ▼
10503	.03	863	●	.OP .MP	.ST	.9	2295	2385	2475	5700-8520	18	38	.DA .PU .D1
	.04	1144					3060	3180	3300	7600-11360	24	51	
	.05	1425					3825	3975	4125	9500-14200	30	64	
	.06	1706					4590	4770	4950	11400-17040	35	76	
	.07	1987					5355	5565	5775	13300-19880	41	89	
	.08	2268					6120	6360	6600	15200-22720	47	102	
	.03	863			.HI		5472	4767	4956	-	35	-	
	.04	1144					7296	6356	6608	-	47	-	
	.05	1425					9120	7945	8260	-	59	-	
	.06	1706					10944	9534	9912	-	71	-	
	.07	1987					12768	11123	11564	-	83	-	
	.08	2268					14592	12712	13216	-	94	-	

SKETCH

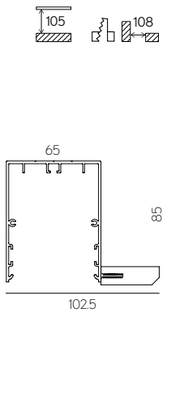

Reference order ⬟ ● ■ ▼

10503.XX.TR.XX.XX.XX.X.XX.XX

IBIZA DEEP STRAIGHT

REF.	⬟	MM	FINISH ●	DIFFUSER ■	POWER	CRI	.27	.30	.40	.TW*2	K	TW	DIMM ▼
10505	.03	863	●	.OP .MP	.ST	.9	2295	2385	2475	5700-8520	18	38	.DA .PU .D1
	.04	1144					3060	3180	3300	7600-11360	24	51	
	.05	1425					3825	3975	4125	9500-14200	30	64	
	.06	1706					4590	4770	4950	11400-17040	35	76	
	.07	1987					5355	5565	5775	13300-19880	41	89	
	.08	2268					6120	6360	6600	15200-22720	47	102	
	.03	863			.HI		5472	4767	4956	-	35	-	
	.04	1144					7296	6356	6608	-	47	-	
	.05	1425					9120	7945	8260	-	59	-	
	.06	1706					10944	9534	9912	-	71	-	
	.07	1987					12768	11123	11564	-	83	-	
	.08	2268					14592	12712	13216	-	94	-	

SKETCH



Reference order ⬟ ● ■ ▼

10505.XX.TR.XX.XX.XX.X.XX.XX

TRIMLESS

.TR

● Select finishes







.WH-WH






IBIZA

REF 10500 | 10501 | 10502 | 10503 | 10504 | 10505.TR

ACCESORIES

UNIONS	REF.	MM	FOR MODEL
	**UA05**	175x175	10500
	**UA07**	220x220	10501
	**UA09**	215x215	10502
	**UA11**	140x140	10503
	**UA13**	245x245	10504 INSIDE
	**UA15**	235x235	10504 OUTSIDE
	**UA17**	175x175	10505

COVER KITS / ENDINGS	REF.	THICKNESS (MM)	FOR MODEL
	**FK500**	2x62	10500
	**CK08**	2x1	10501
	**CK08**	2x1	10502
	**FK503**	2x62	10503
	**CK08**	2x1	10504
	**FK505**	2x62	10505



- Select finishes




.WH-WH




IBIZA

REF 10500 | 10501 | 10502 | 10503 | 10504 | 10505.TR

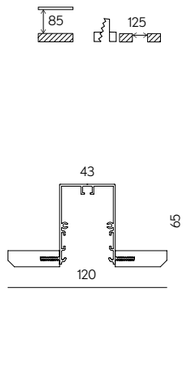MENORCA FLAT	REF.	DIMENSIONS ⬟	MM	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT | LUMEN .27	.30	.40	.TW*2	WATT K	TW	DIMM ▼	SKETCH
	10550	.03	863	●	.OP .MP	.ST	.9	2295	2385	2475	5700-8520	18	38	.DA .PU .D1	
		.04	1144					3060	3180	3300	7600-11360	24	51		
		.05	1425					3825	3975	4125	9500-14200	30	64		
		.06	1706					4590	4770	4950	11400-17040	35	76		
		.07	1987					5355	5565	5775	13300-19880	41	89		
		.08	2268					6120	6360	6600	15200-22720	47	102		
		.03	863			.HI		5472	4767	4956	-	35	-		
		.04	1144					7296	6356	6608	-	47	-		
		.05	1425					9120	7945	8260	-	59	-		
		.06	1706					10944	9534	9912	-	71	-		
		.07	1987					12768	11123	11564	-	83	-		
		.08	2268					14592	12712	13216	-	94	-		

Reference order | 10550.XX.TR.XX.XX.XX.X.XX.XX

MENORCA DEEP WAVE	REF.	DIMENSIONS ⬟	MM	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT | LUMEN .27	.30	.40	.TW*2	WATT K	TW	DIMM ▼	SKETCH
	10551	.03	863	●	.OP .MP	.ST	.9	2295	2385	2475	5700-8520	18	38	.DA .PU .D1	
		.04	1144					3060	3180	3300	7600-11360	24	51		
		.05	1425					3825	3975	4125	9500-14200	30	64		
		.06	1706					4590	4770	4950	11400-17040	35	76		
		.07	1987					5355	5565	5775	13300-19880	41	89		
		.08	2268					6120	6360	6600	15200-22720	47	102		
		.03	863			.HI		5472	4767	4956	-	35	-		
		.04	1144					7296	6356	6608	-	47	-		
		.05	1425					9120	7945	8260	-	59	-		
		.06	1706					10944	9534	9912	-	71	-		
		.07	1987					12768	11123	11564	-	83	-		
		.08	2268					14592	12712	13216	-	94	-		

Reference order | 10551.XX.TR.XX.XX.XX.X.XX.XX

• FINISHES

□

• DIMENSIONS

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

OPAL

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE


2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

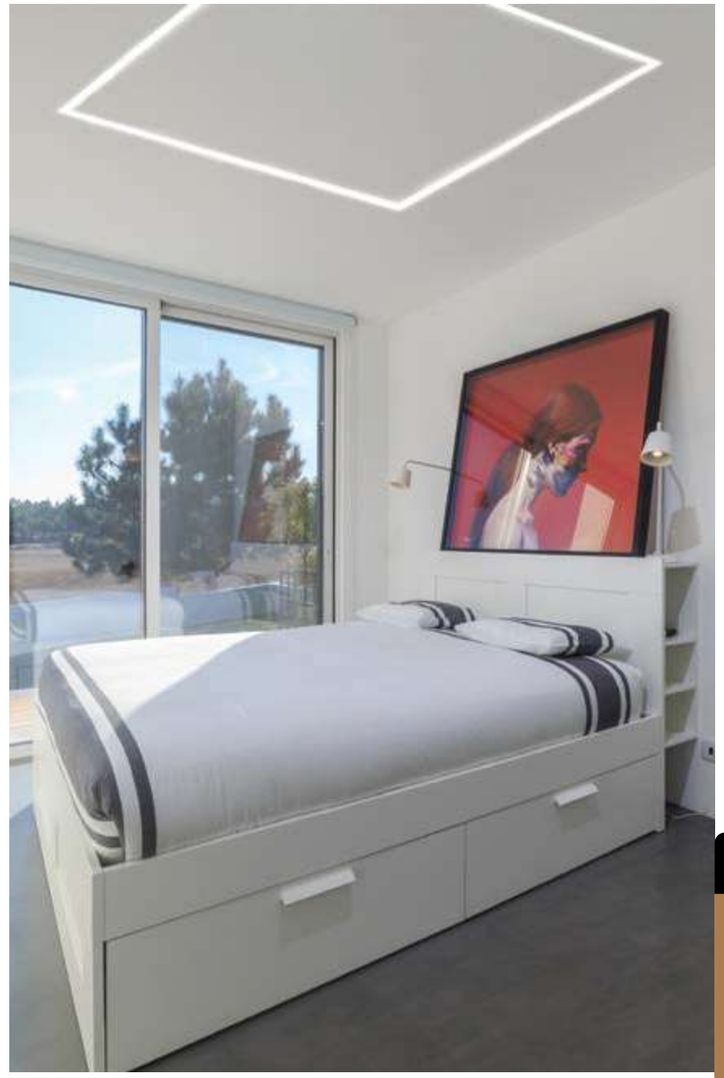

.TR

TRIMLESS

● Select finishes



.WH-WH



MENORCA


REF 10550 | 10551 | 10552 | 10553 | 10554 | 10555.TR

MENORCA DEEP TILT



REF.	DIMENSIONS ⬟	MM	FINISH ●	DIFFUSER ■	POWER	CRI	DOWNLIGHT | LUMEN .27	.30	.40	.TW*2	WATT K	TW	DIMM ▼
10552	.03	863	●	.OP .MP	.ST	.9	2295	2385	2475	5700-8520	18	38	.DA .PU .D1
	.04	1144					3060	3180	3300	7600-11360	24	51	
	.05	1425					3825	3975	4125	9500-14200	30	64	
	.06	1706					4590	4770	4950	11400-17040	35	76	
	.07	1987					5355	5565	5775	13300-19880	41	89	
	.08	2268					6120	6360	6600	15200-22720	47	102	
	.03	863			.HI		5472	4767	4956	-	35	-	
	.04	1144					7296	6356	6608	-	47	-	
	.05	1425					9120	7945	8260	-	59	-	
	.06	1706					10944	9534	9912	-	71	-	
	.07	1987					12768	11123	11564	-	83	-	
	.08	2268					14592	12712	13216	-	94	-	

SKETCH



Reference order ⬟ ● ■ ▼


10552.XX.TR.XX.XX.XX.X.XX.XX

MENORCA WASHER



REF.	DIMENSIONS ⬟	MM	FINISH ●	DIFFUSER ■	POWER	CRI	DOWNLIGHT | LUMEN .27	.30	.40	.TW*2	WATT K	TW	DIMM ▼
10554	.03	863	●	.OP .MP	.ST	.9	2295	2385	2475	5700-8520	18	38	.DA .PU .D1
	.04	1144					3060	3180	3300	7600-11360	24	51	
	.05	1425					3825	3975	4125	9500-14200	30	64	
	.06	1706					4590	4770	4950	11400-17040	35	76	
	.07	1987					5355	5565	5775	13300-19880	41	89	
	.08	2268					6120	6360	6600	15200-22720	47	102	
	.03	863			.HI		5472	4767	4956	-	35	-	
	.04	1144					7296	6356	6608	-	47	-	
	.05	1425					9120	7945	8260	-	59	-	
	.06	1706					10944	9534	9912	-	71	-	
	.07	1987					12768	11123	11564	-	83	-	
	.08	2268					14592	12712	13216	-	94	-	

SKETCH



Reference order ⬟ ● ■ ▼

10554.XX.TR.XX.XX.XX.X.XX.XX

MENORCA EDGE



REF.	DIMENSIONS ⬟	MM	FINISH ●	DIFFUSER ■	POWER	CRI	DOWNLIGHT | LUMEN .27	.30	.40	.TW*2	WATT K	TW	DIMM ▼
10553	.03	863	●	.OP .MP	.ST	.9	2295	2385	2475	5700-8520	18	38	.DA .PU .D1
	.04	1144					3060	3180	3300	7600-11360	24	51	
	.05	1425					3825	3975	4125	9500-14200	30	64	
	.06	1706					4590	4770	4950	11400-17040	35	76	
	.07	1987					5355	5565	5775	13300-19880	41	89	
	.08	2268					6120	6360	6600	15200-22720	47	102	
	.03	863			.HI		5472	4767	4956	-	35	-	
	.04	1144					7296	6356	6608	-	47	-	
	.05	1425					9120	7945	8260	-	59	-	
	.06	1706					10944	9534	9912	-	71	-	
	.07	1987					12768	11123	11564	-	83	-	
	.08	2268					14592	12712	13216	-	94	-	

SKETCH



Reference order ⬟ ● ■ ▼

10553.XX.TR.XX.XX.XX.X.XX.XX

MENORCA DEEP STRAIGHT



REF.	DIMENSIONS ⬟	MM	FINISH ●	DIFFUSER ■	POWER	CRI	DOWNLIGHT | LUMEN .27	.30	.40	.TW*2	WATT K	TW	DIMM ▼
10555	.03	863	●	.OP .MP	.ST	.9	2295	2385	2475	5700-8520	18	38	.DA .PU .D1
	.04	1144					3060	3180	3300	7600-11360	24	51	
	.05	1425					3825	3975	4125	9500-14200	30	64	
	.06	1706					4590	4770	4950	11400-17040	35	76	
	.07	1987					5355	5565	5775	13300-19880	41	89	
	.08	2268					6120	6360	6600	15200-22720	47	102	
	.03	863			.HI		5472	4767	4956	-	35	-	
	.04	1144					7296	6356	6608	-	47	-	
	.05	1425					9120	7945	8260	-	59	-	
	.06	1706					10944	9534	9912	-	71	-	
	.07	1987					12768	11123	11564	-	83	-	
	.08	2268					14592	12712	13216	-	94	-	

SKETCH



Reference order ⬟ ● ■ ▼

10555.XX.TR.XX.XX.XX.X.XX.XX

TRIMLESS

.TR

● Select finishes



.WH-WH






MENORCA

REF 10550 | 10551 | 10552 | 10553 | 10554 | 10555.TR

ACCESORIES

UNIONS	REF.	MM	FOR MODEL
	**UA04**	175x175	10550
	**UA06**	205x205	10551
	**UA08**	200x200	10552
	**UA10**	135x135	10553
	**UA12**	220x220	10554 INSIDE
	**UA14**	225x225	10554 OUTSIDE
	**UA16**	175x175	10555

COVER KITS / ENDINGS	REF.	THICKNESS (MM)	FOR MODEL
	**FK550**	2x62	10550
	**CK10**	2x1	10551
	**CK10**	2x1	10552
	**FK553**	2x62	10553
	**CK10**	2x1	10554
	**FK555**	2x62	10555



.TR

TRIMLESS

- Select finishes



.WH-WH



MENORCA

REF 10550 | 10551 | 10552 | 10553 | 10554 | 10555.TR

TRACK

VISUAL INDEX

ALBA



ALBA PLUS

10178 PAG. XXX



ALBA

10160 PAG. XXX

MARTORELL



MARTORELL

20115 PAG. XXX



MARTORELL TUBE MOVE

20138 PAG. XXX

KLIMT



KLIMT

20134 PAG. XXX

GEO



GEO

30511 PAG. XXX

LUK



LUK CRUSADER

20082 PAG. XXX



LUK HAWKEYE

20083 PAG. XXX



LUK HAWKEYE 2

20084 PAG. XXX

CUBE



CUBE TUBE

9050 PAG. XXX

ORACLE



ORACLE

20087 PAG. XXX

PATRICIA TK



PATRICIA TK

30514 PAG. XXX



FINISHES

● COLORS

DIMENSIONS

⬟ LENGTHS mm.

863 | 1144 | 1425 | 1706 | 1987 | 2268

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1.10

▲ LIGHT DISTRIBUTION


DOWN

LUMINAIRE INCLUDES

Track adapter
Diffuser
Electric system

new





ON DEMAND

Emergency Lighting*
Motion Detection
Well-Certified LED Boards
Taylor your own design
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

INSTALLATIONS



.PN
PENDANT

·10178 ALBA PLUS | PN
Pag. 175

.TK
TRACK

·10178 ALBA PLUS | TK
Pag. 175

.SR
SURFACE

·10178 ALBA PLUS | SR
Pag. 175

.RF
RECESSED FRAME

·10178 ALBA PLUS | RF
Pag. 175


.TR
TRIMLESS

·10178 ALBA PLUS | TR
Pag. 175

ALUMINIUM PC · 0° · 0° · CRI ≥90 · IK06 · IP20 IP40 · LIFE 50000H · DIM OPTIONAL · INTEGRATED · INDOOR · 220-240 V 50-60 Hz · CE

ALBA PLUS

REF 10178.TK





REF.	DIMENSION ⬟	MM	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT *2 | LUMEN .27	.30	.40	.TW *1	WATT K	TW	DIMM ▼
10178	.03	863	●	.OP .MP	.ST	.9	2295	2385	2475	5700-8520	18	38	.DA .D1
	.04	1144					3060	3180	3300	7600-11360	24	51	
	.05	1425					3825	3975	4125	9500-14200	30	64	
	.06	1706					4590	4770	4950	11400-17040	35	76	
	.07	1987					5355	5565	5775	13300-19880	41	89	
	.08	2268					6120	6360	6600	15200-22720	47	102	

REF.	DIMENSION ⬟	MM	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT *2 | LUMEN .27	.30	.40	WATT	DIMM ▼
10178	.03	863	●	.OP .MP	.HI	.9	4590	4767	4956	35	.DA .D1
	.04	1144					6120	6356	6608	47	
	.05	1425					7650	7945	8260	59	
	.06	1706					9180	9534	9912	71	
	.07	1987					10710	11123	11564	83	
	.08	2268					12240	12712	13216	94	

Reference order | 10178.XX.TK.XX.XX.XX.X.XX.XX.XX


COMPONENTS

COVERT KIT	REF.	FINISH
	TF01	●

Reference order | TP01.TK.XX ●

REDUGER	REF.	POWER
	ACC.RG	.ST .HI


Reference order | ACC.RG.XX

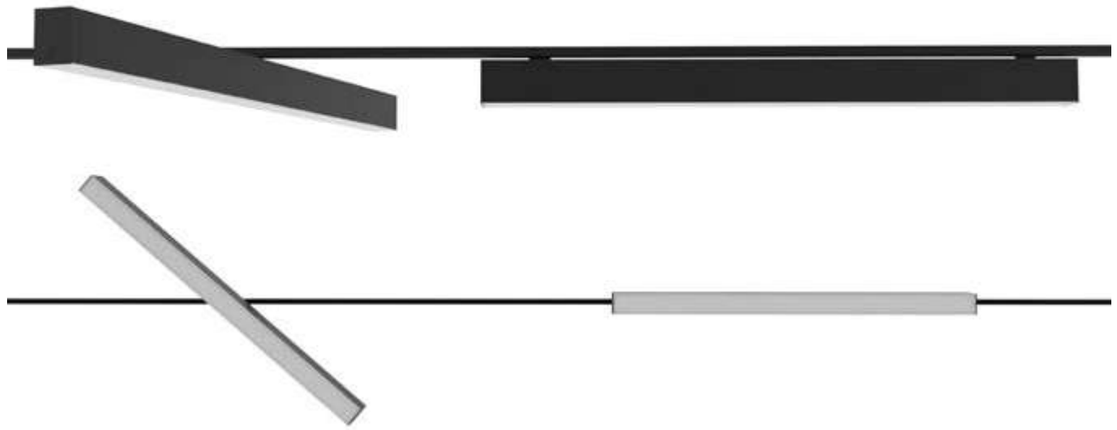

.TK

TRCKLIGHT

● Select finishes






ALBA PLUS

REF 10178.TK

PHOTOMETRY




OPAL MICROPRISMATIC

INCLUDED




ACC.ADP

PROFILE



*1 Tunable White (.TW) values correspond to 2700K and 6500K - .TW is only available for DALI dimmable (.DA), CRI 80 (.8) 700mA. *Los valores del blanco dinámico (.TW) corresponden a 2700K y 6500K. -.TW solo está disponible con protocolo DALI (.DA), CRI 80 (.8) 700mA.*

*2 Down light (direct light) works at 500mA. *La luz directa trabaja a 500mA.*

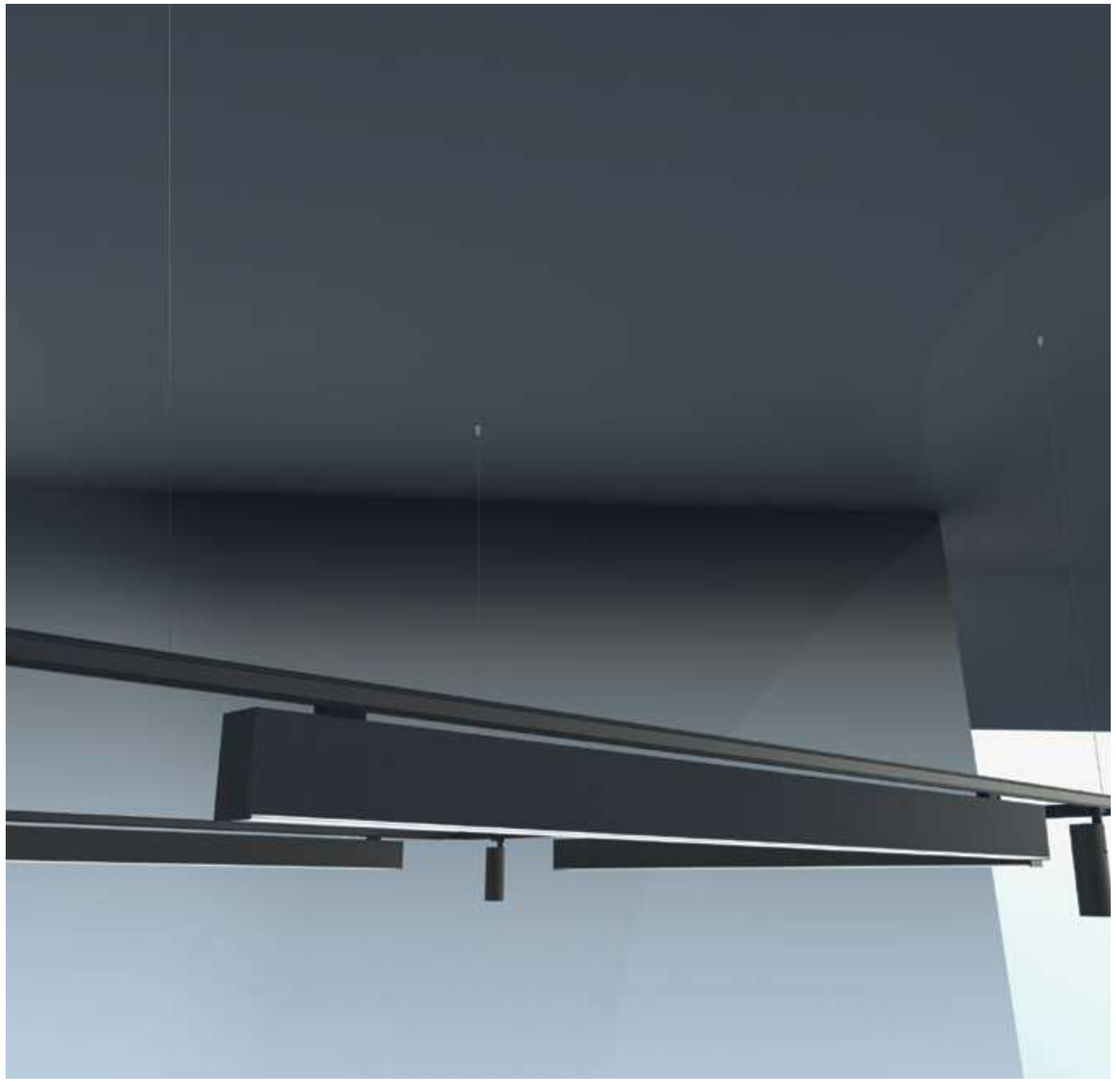

new

FINISHES

● COLORS

DIMENSIONS

⬟ LENGTHS mm.

863 | 1144 | 1425 | 1706 | 1987 | 2268

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1.10

▲ LIGHT DISTRIBUTION

DOWN





LUMINAIRE INCLUDES

Track apadter
Diffuser
Electric system

ON DEMAND

Emergency Lighting*
Motion Detection
Well-Certified LED Boards
Taylor your own design
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

TRCKLIGHT

.TK

ALBA

REF 10160.TK

ALUMINIUM PC | 0° | 0° | CRI ≥90 | IK06 | IP20 IP40 | LIFE 50000H | DIM OPTIONAL | INTEGRATED | INDOOR | 220-240 V 50-60 Hz | CE

INSTALLATIONS



.PN
PENDANT

·10160 ALBA | PN
Pag. 175

.WS
WALL SURFACE

·10160 ALBA | WS
Pag. 175

.TK
TRACK

·10160 ALBA | TK
Pag. 175

.SR
SURFACE


·10160 ALBA | SR
Pag. 175

.RF
RECESSED FRAME

·10160 ALBA | RF
Pag. 175

.TR
TRIMLESS

·10160 ALBA | TR
Pag. 175

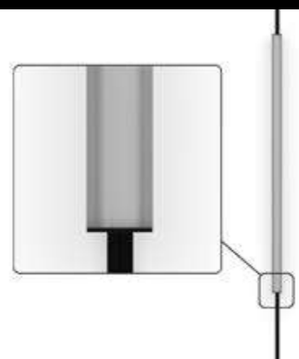



REF.	DIMENSION ⬟	MM	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT *2 | LUMEN .27	.30	.40	.TW *1	WATT K	TW	DIMM ▼
10160	.03	863	●	.OP .MP	.ST	.9	2295	2385	2475	5700-5910	18	38	.DA .D1
	.04	1144					3060	3180	3300	7600-7880	24	51	
	.05	1425					3825	3975	4125	9500-9850	30	64	
	.06	1706					4590	4770	4950	11400-11820	35	76	
	.07	1987					5355	5565	5775	13300-13790	41	89	
	.08	2268					6120	6360	6600	15200-15760	47	102	

REF.	DIMENSION ⬟	MM	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT *2 | LUMEN .27	.30	.40	WATT	DIMM ▼
10160	.03	863	●	.OP .MP	.HI	.9	4590	4767	4956	35	.DA .D1
	.04	1144					6120	6356	6608	47	
	.05	1425					7650	7945	8260	59	
	.06	1706					9180	9534	9912	71	
	.07	1987					10710	11123	11564	83	
	.08	2268					12240	12712	13216	94	

Reference order | 10160.XX.TK.XX.XX.XX.X.XX.XX.XX


COMPONENTS

COVERT KIT	REF.	FINISH
	TF02	●

Reference order | TF02.TK.XX ●

REDUGER	REF.	POWER
	ACC.RG	.ST .HI

Reference order | ACC.RG.XX

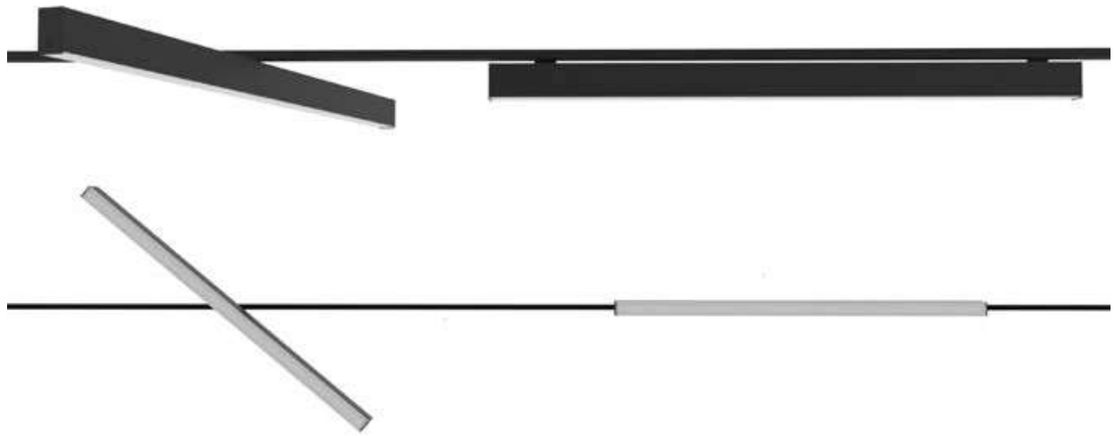

.TK

TRCKLIGHT

● Select finishes






ALBA

REF 10160.TK

PHOTOMETRY




OPAL MICROPRISMATIC

INCLUDED



ACC.ADP

PROFILE



*1 Tunable White (.TW) values correspond to 2700K and 6500K - .TW is only available for DALI dimmable (.DA), CRI 80 (.8) 700mA. *Los valores del blanco dinámico (.TW) corresponden a 2700K y 6500K. -.TW solo está disponible con protocolo DALI (.DA), CRI 80 (.8) 700mA.*

*2 Down light (direct light) works at 500mA. *La luz directa trabaja a 500mA.*





One design, endless solutions

With flair and imagination, some products offer boundless possibilities. One of these is Patricia, the epitome of versatility.

Simple designs that enhance every project and adapt to every need. What's the secret? The accessories - Honey comb, cross ring, barndoors, spot lenses, halves, extenders and ovals – designed to bring light into the dark, to create elliptical shapes, spotlight effects, to draw the eye to a specific place, and much more.


Un diseño, múltiples soluciones

Hay productos que, con la destreza necesaria, permiten amplias posibilidades de aplicación. Y hay productos como Patricia, que son en sí mismos la máxima expresión de versatilidad.

Modelos de estética sencilla pero diseñados para evolucionar y adaptarse a cada exigencia. ¿Cómo conseguirlo? Gracias a sus accesorios - Honey comb, cross Ring, aletas, lentes concentradas, medias, extensivas y ovales – pensados para dar solución a situaciones de deslumbramiento, conseguir formas de luz elípticas, focales, direccionar el interés sobre un punto....Y un largo etcétera.

PATRICIA TK

TRACK

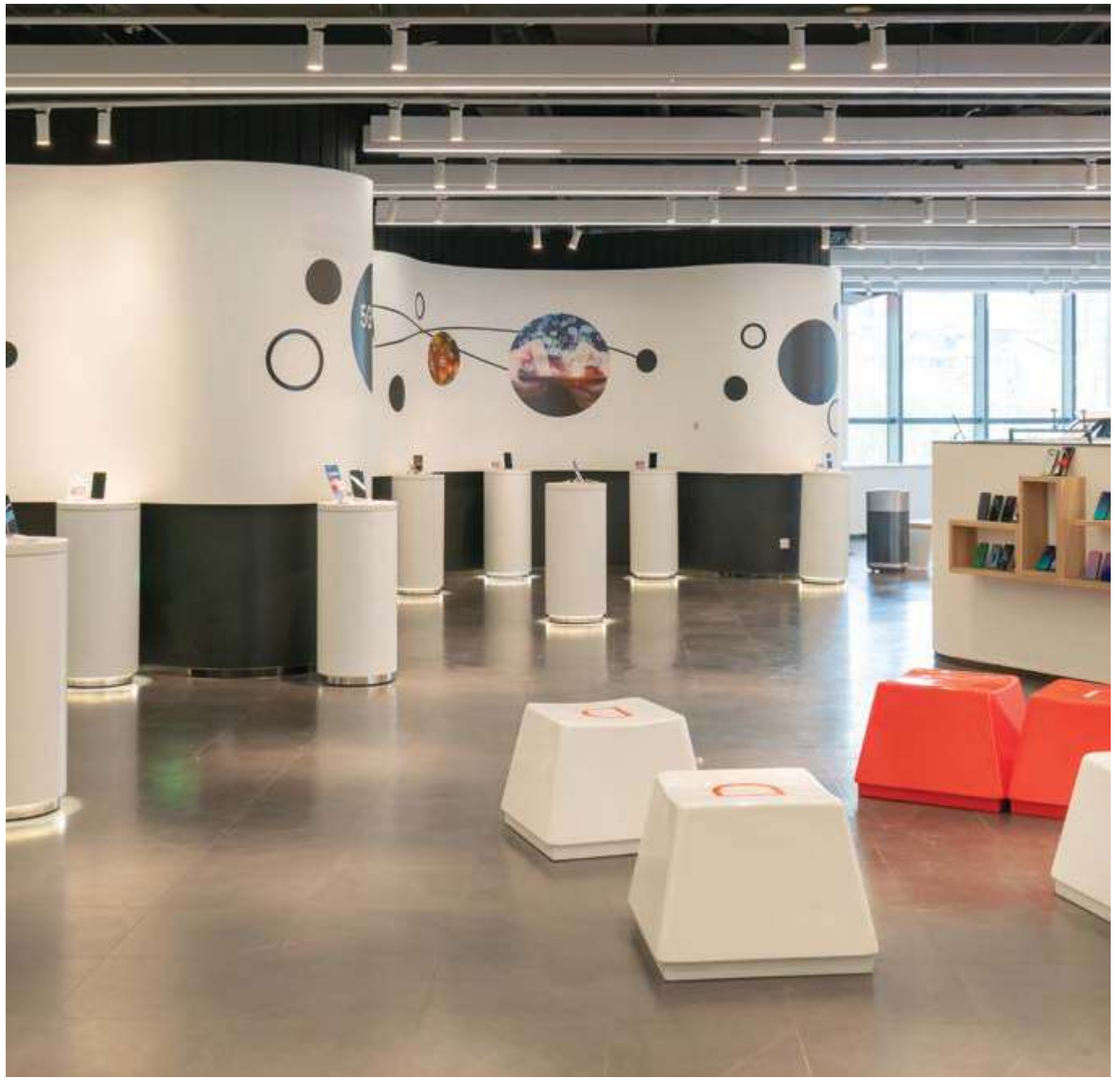

• FINISHES

COLOR

□ ■

DIMENSIONS

⬟ DIAMETERS

.01 | .02 | .03 | .04

LIGHTING OPTIONS

■ BEAM ANGLE

15º | 24º | 36º | 50º

POWER

STANDARD | HIGH (ONLY .03)

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White

new



TRCKLIGHT

INSTALLATIONS

ALUMINIUM PC | 350º | 90º | CRI ≥90 | IK06 | IP20 IP40 | LIFE 50000H | DIM OPTIONAL | INTEGRATED | INDOOR | 220-240 V 50-60 Hz | CE


PATRICIA TK

REF 30514.TK



.TK
TRACKLIGHT

·30514 PATRICIA TK | TK
Pag. 175







PHOTOMETRY



15º 24º 60º



PATRICIA	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	30514	.01	●	LED	.24 .36 .45 .55	.ST	.9	.27	713	10	250	.DA	
								.30	752				
								.40	919				
	30514	.02	●	LED	.24 .36 .45 .55	.ST	.9	.27	1110	15	350	.DA	
								.30	1200				
								.40	1250				
	30514	.03	●	LED	.15 .24 .36 .50	.ST	.9	.27	1853	25	600	.DA	
								.30	1912				
								.40	1976				
						.HI		.27	2221	32	750		
								.30	2399				
								.40	2470				
	30514	.04	●	LED	.15 .24 .36 .50	.ST	.9	.27	3135	42	1050	.DA	
								.30	3584				
								.40	3910				

Reference order | 30514.XX.TK.XX.XX.XX.9.XX.XX

ACCESORIES



BARN DOOR	⬟ DIMENSIONS								● FINISHES
ACC30514									.WH .BK
	.01	Ø45x130	.02	Ø55	.03	Ø69	.04	Ø82	

⬟ ● ACC30514.XX.BD.XX



CROSS RING	⬟ DIMENSIONS								● FINISHES
ACC30514									.WH .BK
	.01	Ø45x130	.02	Ø55	.03	Ø69	.04	Ø82	

⬟ ● ACC30514.XX.CR.XX



HONEY COMB	⬟ DIMENSIONS								● FINISHES
ACC30514									.BK-BK
	.01	Ø45x130	.02	Ø55	.03	Ø69	.04	Ø82	

⬟ ● ACC30514.XX.HC.XX

TRCKLIGHT

.TK

● Select finishes



.WH-WH .BK-BK

ALUMINIUM PC | 350° | 90° | CRI ≥90 | IK06 | IP20 IP40 | LIFE 50000H | DIM OPTIONAL | INTEGRATED | INDOOR | 220-240 V 50-60 Hz | CE


PATRICIA TK

REF 30514.TK




OVAL FLOOD LENSE


ACC30514.XX.XXXX




OVAL FLOOD LENSE	DIMENSIONS	LENSE EFFECT
ACC30514	.01	.OV.03X60
	.02	
	.03	
	.04	



OVAL FLOOD LENSE	DIMENSIONS	LENSE EFFECT
ACC30514	.01	.OV.60X10
	.02	
	.03	
	.04	



OVAL FLOOD LENSE	DIMENSIONS	LENSE EFFECT
ACC30514	.01	.OV.10X40
	.02	
	.03	
	.04	




OVAL FLOOD LENSE	DIMENSIONS	LENSE EFFECT
ACC30514	.01	.OV.15X60
	.02	
	.03	
	.04	




ZOOM SPOT LENSE


ACC30514.XX.XXXX




OVAL FLOOD LENSE	DIMENSIONS	LENSE EFFECT
ACC30514	.01	.ZSX1.3
	.02	
	.03	
	.04	




OVAL FLOOD LENSE	DIMENSIONS	LENSE EFFECT
ACC30514	.01	.ZSX1.5
	.02	
	.03	
	.04	



OVAL FLOOD LENSE	DIMENSIONS	LENSE EFFECT
ACC30514	.01	.ZSX2
	.02	
	.03	
	.04	




OVAL FLOOD LENSE	DIMENSIONS	LENSE EFFECT
ACC30514	.01	.ZSX3
	.02	
	.03	
	.04	

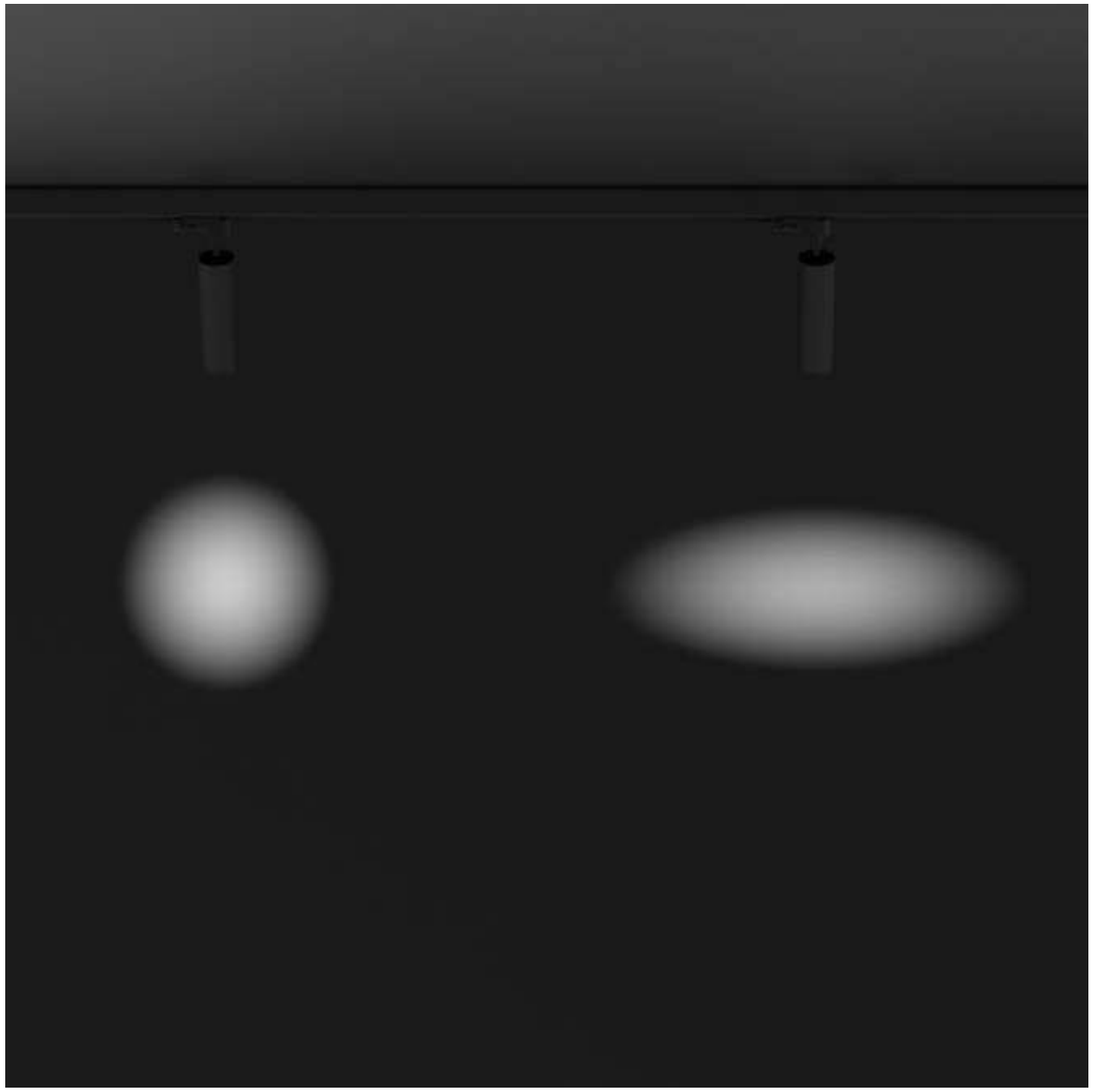



PATRICIA TK

REF 30514.TK

MARTORELL	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	20115	.03	●	LED	.24 .32	.ST	.9	.27	1071	15	350	.DA .PU .D1	
								.30	1156				
								.40	1198				

Reference order | 20115.XX.TK.XX.XX.ST.9.XX.XX

● Select finishes



• FINISHES

EXTERNAL COLOR



INTERNAL COLOR



DIMENSIONS

⬟ View in family specifications

.03

LIGHTING OPTIONS

■ BEAM ANGLE

24º | 32º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN


ON DEMAND

Dim to Warm
Tunable White
Honey Comb
Wireless Control Options
Special RAL Color



MARTORELL

REF 20115.TK



INSTALLATIONS



.PN
PENDANT

·20115 MARTORELL | PN
Pag. 175

.TK
TRACKLIGHT

·20115 MARTORELL | TK
Pag. 175

.SR
SURFACE

·20115 MARTORELL | SR
Pag. 175

.RF
RECESSED FRAME

·20115 MARTORELL | RF
Pag. 175


.TR
TRIMLESS

·20115 MARTORELL | TR
Pag. 175

PHOTOMETRY





MARTORELL CRATE	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	**20138**	**.01** Ø60 x 230	●	**LED**	**.19** **.24** **.36**	**.ST**	**.9**	**.27**	796	10	500	**.DA** **.PU** **.D1**	
								.30	828				
								.40	929				

Reference order | ⬟ ● ■ ▼ 20138.XX.TK.XX.XX.ST.9.XX.XX

● Select finishes



• FINISHES

EXTERNAL COLOR



INTERNAL COLOR



DIMENSIONS

⬟ View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE

19º | 24º | 36º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White



INSTALLATIONS



MARTORELL
TUBE MOVE

REF 20138.TK



.SR
SURFACE

·20138 MARTORELL TUBE MOVE | SR
Pag. 175



.TK
TRACKLIGHT

·20138 MARTORELL TUBE MOVE | TK
Pag. 175

PHOTOMETRY





KLIMT	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	**20134**	**.01** Ø75 x 139	●	LED	**.15 .24 .38**	**.ST**	**.9**	**.27**	395	8	700	**.DA .PU .D1**	
								.30	497				
								.40	659				
	**20134**	**.02** Ø100 x 144	●	LED	**.15 .25 .38 .60**	**.ST**	**.9**	**.27**	803	11	500	**.DA .PU .D1**	
								.30	983				
								.40	991				
	**20134**	**.03** Ø125 x 196	●	LED	**.15 .28 .40 .60**	**.ST**	**.9**	**.27**	1945	30	500	**.DA .PU .D1**	
								.30	2073				
								.40	2311				

Reference order | ⬟ ● ■ ▼ 20134.XX.TK.XX.XX.ST.9.XX.XX

• FINISHES

EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

15º 24º 38º | 15º 25º 38º 60º | 15º 28º 40º 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND


Dim to Warm
Tunable White



● Select external - internal finishes



BK-BK BK-GC WH-WH WH-GC



INSTALLATIONS
INSTALACIONES



KLIMT

REF 20134.TK



.SR
SURFACE

·20134 KLIMT | SR
Pag. 175

.TK
TRACKLIGHT


·20134 KLIMT | TK
Pag. 175

.RF
RECESSED FRAME

·20134 KLIMT | RF
Pag. 175

PHOTOMETRY



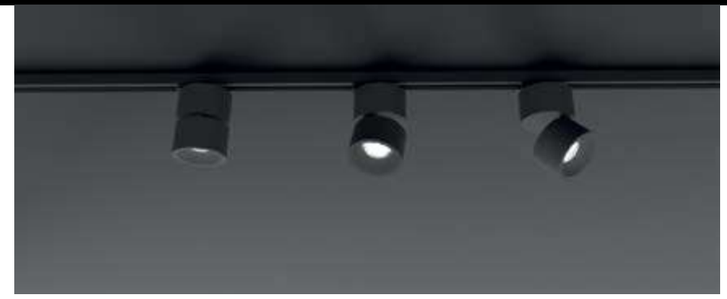


GEO	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	**30511**	**.01**	●	**LED**	**.15 .24 .38**	**.ST**	**.9**	**.27**	498	8	700	**.DA .PU .D1**	 165 Ø82
								.30	513				
								.40	622				
	**30511**	**.02**	●	**LED**	**.15 .24 .38 .60**	**.ST**	**.9**	**.27**	1075	14	350	**.DA .PU .D1**	 190 Ø102
								.30	1114				
								.40	1319				
	**30511**	**.03**	●	**LED**	**.15 .24 .40 .60**	**.ST**	**.9**	**.27**	1856	30	700	**.DA .PU .D1**	 220 Ø125
								.30	1963				
								.40	2529				

Reference order | REF.30511.TK.XX.XX.XX.ST.9.XX.XX

● Select external - internal finishes



BK-BK WH-WH



• FINISHES

COLORS

DIMENSIONS

⬟ View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

15º 24º 38º | 15º 25º 38º 60º | 15º 28º 40º 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White

new



GEO

REF 30511.TK

ALUMINIUM PC · 90° · 350° · CRI ≥90 · IK06 · IP20 IP40 · LIFE 50000H · DIM OPTIONAL · INTEGRATED · INDOOR · 220-240 V 50-60 Hz · CE

INSTALLATIONS



.SR
SURFACE

·30511 GEO | SR
Pag. 175



.TK
TRACKLIGHT

·30511 GEO | TK
Pag. 175



.RF
RECESSED FRAME

·30511 GEO | RF
Pag. 175

PHOTOMETRY






CUBE TUBE	REF.	DIMEN-SIONS ⬟	FINISHES	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	**9050**	**.01** 185 x Ø86	●	LED	**.24 .40 .60**	**.ST**	**.9**	**.27**	567	8	350	**.DA .PU .D1**	185 Ø86
								.30	590				
								.40	592				
	**9050**	**.02** 250 x Ø86	●	LED	**.24 .40 .60**	**.ST**	**.9**	**.27**	567	8	350	**.DA .PU .D1**	250 Ø86
								.30	590				
								.40	592				
	**9050**	**.03** 350 x Ø86	●	LED	**.24 .40 .60**	**.ST**	**.9**	**.27**	567	8	350	**.DA .PU .D1**	350 Ø86
								.30	590				
								.40	592				
	**9050**	**.04** 450 x Ø86	●	LED	**.24 .40 .60**	**.ST**	**.9**	**.27**	567	8	350	**.DA .PU .D1**	450 Ø86
								.30	590				
								.40	592				

Reference order | REF.9050.TK.XX.XX.XX.ST.9.XX.XX

● Select finishes





• FINISHES

EXTERNAL COLOR



INTERNAL COLOR



DIMENSIONS

⬟ View in family specifications

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

15º 40º 60º | 24º 40º 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND


Dim to Warm
Tunable White



.TK

TRCKLIGHT

INSTALLATIONS



CUBE TUBE

REF 9050.TK



.PN
PENDANT

·9050 | 9052 CUBE TUBE | PN
Pag. 175

.TK
TRACKLIGHT

·9050 CUBE TUBE | TK
Pag. 175




.SR
SURFACE

·9050 | 9052 CUBE TUBE | SR
Pag. 175

PHOTOMETRY






LUK CRUSADER	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	20082	.01	●	LED	.24 .40 .60	.ST	.9	.27	1633	26	700	.DA .PU .D1	
								.30	2138				
								.40	2228				

Reference order | REF.20082.TK.XX.XX.XX.ST.9.XX.XX

● Select finishes



BK-BK WH-WH WH-BK



• FINISHES

COLOR

DIMENSIONS

⬟ View in family specifications

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

24º | 40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White



ALUMINIUM PC | 350º | 90º | CRI ≥90 | IK06 | IP20 IP40 | L80B10 50000H | DIM OPTIONAL | INTEGRATED | INDOOR | 220-240 V 50-60 Hz | CE

LUK CRUSADER

REF 20082.TK

INSTALLATIONS



.SR
SURFACE

·20082 LUK CRUSADER | SR
Pag. 175

.TK
TRACKLIGHT


·20082 LUK CRUSADER | TK
Pag. 175

PHOTOMETRY




24º 40º 60º




LUK HAWKEYE	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	20083	.01	●	LED	.24 .40 .60	.ST	.9	.27	1689	27	700	.DA .PU .D1	
								.30	2007				
								.40	2217				

Reference order | REF.20083.TK.XX.XX.XX.ST.9.XX.XX


LUK HAWKEYE 2	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	20084	.01	●	LED	.24 .40 .60	.ST	.9	.27	4325	51	700	.DA .PU .D1	
								.30	4565				
								.40	4706				

Reference order | REF.20084.TK.XX.XX.XX.ST.9.XX.XX

● Select finishes



BK-BK WH-WH WH-BK

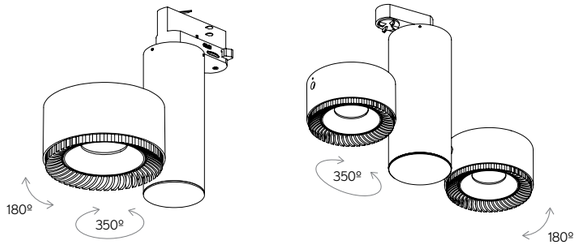

• FINISHES

COLOR

DIMENSIONS

⬟ View in family specifications

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

24º | 40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White



.TK

TRCKLIGHT

INSTALLATIONS



LUK
HAWKEYE | HAWKEYE 2

REF 20083.TK | 20084.TK



.SR
SURFACE

·20083 HAWKEYE ·20084 HAWKEYE 2 | SR
Pag. 175



.TK
TRACKLIGHT


·20083 HAWKEYE ·20084 HAWKEYE 2 | TK
Pag. 175

PHOTOMETRY



24º 40º 60º




ORACLE	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	**20087**	**.01**	●	**LED**	**.20** **.40** **.60**	**.ST**	**.9**	**.27**	1079	14	500	**.DA** **.PU** **.D1**	
								.30	1216				
								.40	1273				

Reference order | REF.20087.TK.XX.XX.XX.ST.9.XX.XX

● Select finishes





• FINISHES

EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ View in family specifications

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

20º | 40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White



INSTALLATIONS



ORACLE

REF 20087.TK



.PN
PENDANT

·20087 ORACLE | PN
Pag. 175


.TK
TRACKLIGHT

·20087 ORACLE | TK
Pag. 175


.SR
SURFACE

·20087 ORACLE | SR
Pag. 175

PHOTOMETRY

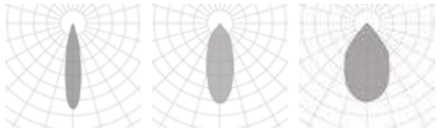



3-CIRCUIT TRACK	REF	DIMENSIONS ⬟	INST. ■	FINISH ●	DIMM. ▼	SKETCH
	ACC6684	.01 1000 .02 2000	.RF	.BK-BK .GY-GY .WH-WH	.DA	 32.5 14 56
			.SR*			 32.5 14 31.5

* Add pendant mounting to track profile ACC6684.01.SR & ACC6684.02.SR with accesories ACC6666 + ACC6665.
Añadir instalación colgante al perfil track ACC6684.01.SR & ACC6684.02.SR *con los accesorios* ACC6666 + ACC6665.

Reference order | ACC6684.XX.XX.XX.XX

L-CORNER ADJUSTABLE	REF	FINISH ●	DIMM. ▼
	ACC6660	.BK-BK .GY-GY .WH-WH	.DA

Reference order | ACC6660.XX.XX

L-CORNER	REF	FINISH ●	DIMM. ▼
	ACC6659	.BK-BK .GY-GY .WH-WH	.DA

Reference order | ACC6659.XX.XX

T-ANGLE	REF	FINISH ●	DIMM. ▼
	ACC6661	.BK-BK .GY-GY .WH-WH	.DA

Reference order | ACC6661.XX.XX

X-ANGLE	REF	FINISH ●	DIMM. ▼
	ACC6662	.BK-BK .GY-GY .WH-WH	.DA

Reference order | ACC6662.XX.XX

MIDDLE FEED	REF	FINISH ●	DIMM. ▼
	ACC6681	.BK-BK .GY-GY .WH-WH	.DA

Reference order | ACC6681.XX.XX

MIDDLE FEED	REF	FINISH ●	DIMM. ▼
	ACC6682	.BK-BK .GY-GY .WH-WH	.DA

Reference order | ACC6682.XX.XX

POWER SUPPLY	REF	FINISH ●	DIMM. ▼
	ACC6656	.BK-BK .GY-GY .WH-WH	.DA

Reference order | ACC6656.XX.XX

DALI ADAPTER	REF	FINISH ●
	ACC6685	.BK-BK .GY-GY .WH-WH

Reference order | ACC6685.XX

END CAP	REF	FINISH ●
	ACC6663	.BK-BK .GY-GY .WH-WH

Reference order | ACC6663.XX

COVER PLATE	REF	FINISH ●
	ACC6664	.BK-BK .GY-GY .WH-WH

Reference order | ACC6664.XX

BRACKET FOR PENDANT INST.	REF	FINISH ●
	ACC6665	.BK-BK .GY-GY .WH-WH

Reference order | ACC6665.XX

CABLE FOR PENDANT INST.	REF	FINISH ●
	ACC6666	.BK-BK .GY-GY .WH-WH

Reference order | ACC6666.XX

THREADED ROD M6	TUBE FOR ROD	NUT M6	
			
ACC6667	ACC6669	EXTENSION NUT M6	ACC6668
		NUT THREADED ROD M6	ACC6670

TK ACCESORIES

WALL SURFACE

VISUAL INDEX

ALBA



ALBA

10160 PAG. XXX



ALBA DOUBLE

10215 PAG. XXX



ALBA ASIMETRIC

210009 PAG. XXX

WALL

WALL METIS

10098 PAG. XXX



WALL ELARA

10097 PAG. XXX

WALL TEBE

10096 PAG. XXX

WALL LEDA

10051 PAG. XXX



WALL ARCE

10055 PAG. XXX



WALL CARPO

10059 PAG. XXX



WALL ZEN OUT

11600 PAG. XXX



WALL ZEN SQ OUT

11601 PAG. XXX


ACOUSTIC



new

ACOUSTIC ALZIRA

230002 PAG. XXX



new

ACOUSTIC ACCESORIES

AC.FL PAG. XXX

WALL LIGHTS



GLIM

410004 PAG. XXX



KUU

410014 PAG. XXX

ELENA

8106 PAG. XXX



OKUMA

8105 PAG. XXX



IKI

9011 PAG. XXX



KAPI

9000 PAG. XXX



HURY

10251 PAG. XXX



FINISHES

● COLORS

DIMENSIONS

⬟ LENGTHS mm.

307 | 588 | 869

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

Wall surface mounting kit



ON DEMAND

Emergency Lighting*
Motion Detection
Well-Certified LED Boards
Taylor your own design
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

INSTALLATIONS



ALBA

REF 10160.WS



.PN
PENDANT

·10160 ALBA | PN
Pag. 175

.WS
WALL SURFACE

·10160 ALBA | WS
Pag. 175

.TK
TRACK

·10160 ALBA | TK
Pag. 175

.SR
SURFACE


·10160 ALBA | SR
Pag. 175

.RF
RECESSED FRAME

·10160 ALBA | RF
Pag. 175

.TR
TRIMLESS

·10160 ALBA | TR
Pag. 175






REF.	DIMENSION ⬟	MM	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT | LUMEN .27	.30	.40	.TW*2	WATT K	TW	DIMM ▼
10160	.01	307	●	.OP .MP	.ST	.9	2295	2385	2475	5700-5910	18	38	.DA .PU .D1
	.02	588					3060	3180	3300	7600-7880	24	51	
	.03	869					3825	3975	4125	9500-9850	30	64	

REF.	DIMENSION ⬟	MM	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT | LUMEN .27	.30	.40	WATT	DIMM ▼
10160	.01	307	●	.OP .MP	.HI	.9	4590	4767	4956	35	.DA .PU .D1
	.02	588					6120	6356	6608	47	
	.03	869					7650	7945	8260	59	

Reference order | 10160.XX.WS.XX.XX.XX.X.XX.XX.XX

● Select finish

.WH-WH .BK-BK .GC-GC .BM-BM .BS-BS .BC-BC .CR-CR .CB-CB .GY-GY .MG-MG .VC-VC .YM-YM

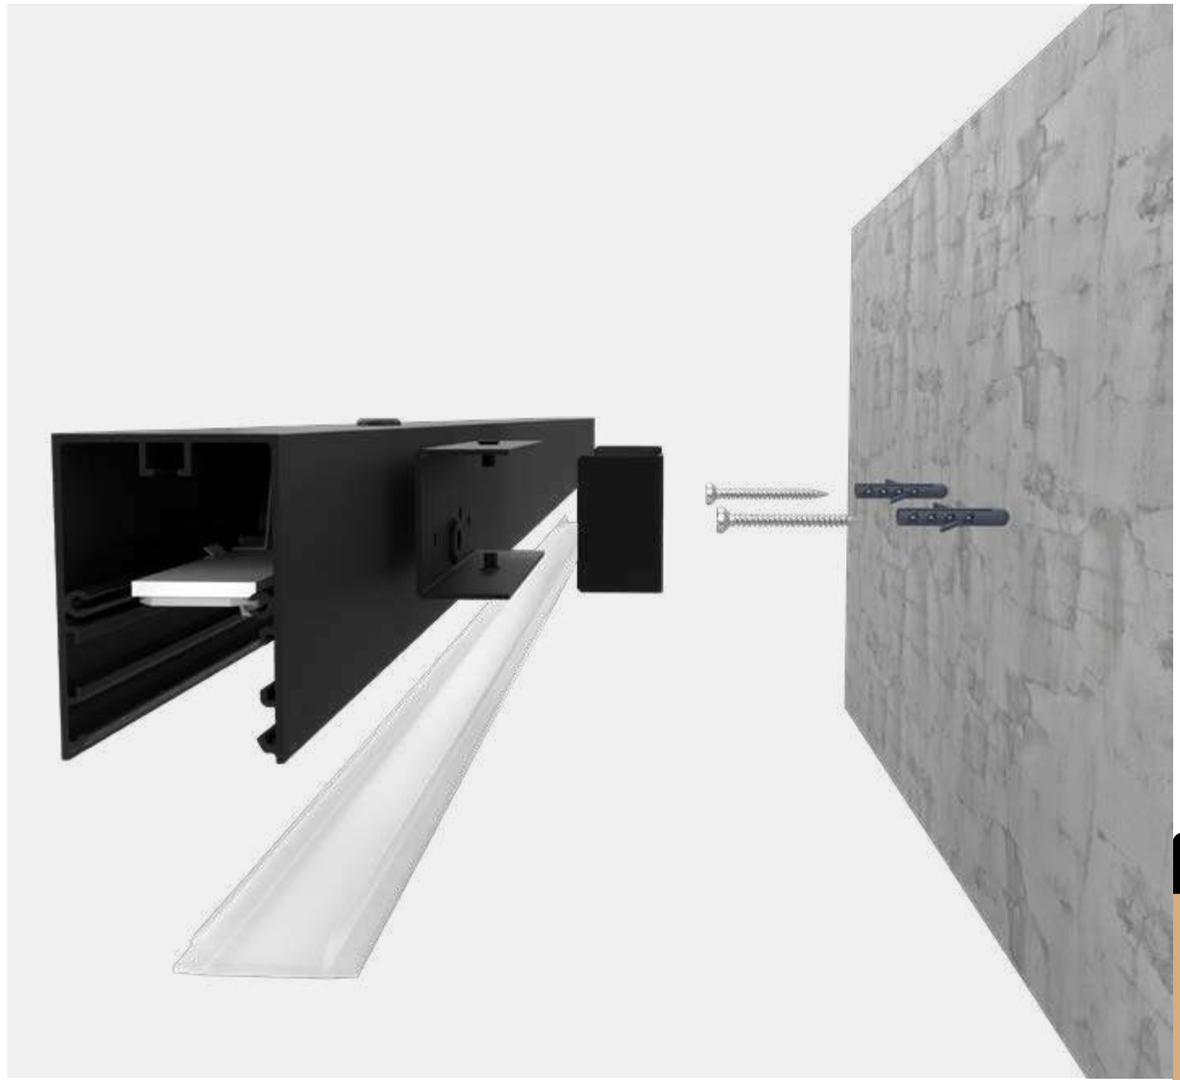


WALL SURFACE

ALUMINIUM PC · 0° · 0° · CRI ≥90 · IK06 · IP20 IP40 · LIFE 50000H · DIM OPTIONAL · INTEGRATED · INDOOR · 220-240 V 50-60 Hz

ALBA

REF 10160.WS

PHOTOMETRY




OPAL MICROPRISMATIC

INCLUDED



PROFILE



*1 Tunable White (.TW) values correspond to 2700K and 6500K - .TW is only available for DALI dimmable (.DA), CRI 80 (.8) 700mA. *Los valores del blanco dinámico (.TW) corresponden a 2700K y 6500K. -.TW solo está disponible con protocolo DALI (.DA), CRI 80 (.8) 700mA.*
*2 Down light (direct light) works at 500mA. *La luz directa trabaja a 500mA.*



FINISHES

● COLORS

DIMENSIONS

⬟ LENGTHS mm.

307 | 588 | 869

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

UP - DOWN

LUMINAIRE INCLUDES

Wall surface mounting kit



ON DEMAND

Emergency Lighting*
Motion Detection
Well-Certified LED Boards
Taylor your own design
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80
HI power

INSTALLATIONS



ALBA
DOUBLE

REF 10215.WS




.PN
PENDANT

·10215 ALBA DOUBLE | PN
Pag. 175



.WS
WALL SURFACE

·10215 ALBA DOUBLE | WS
Pag. 175

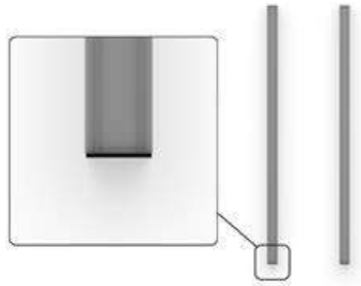




REF.	DIMENSION ⬟	MM	FINISH ●	DIFFUS-ER ■	POWER	CRI	DOWNLIGHT | LUMEN .27	.30	.40	.TW*2	WATT K	TW	UPLIGHT ▲.UP* | LUMEN .27	.30	.40	.TW*2	WATT K	TW	DIMM ▼
10215	.01	327	●	.OP .MP	.ST	.9	725	795	825	1900-1970	18	38	725	795	825	1900-1970	18	38	.DA .PU .D1
	.02	608					1450	1590	1650	3800-3940	24	51	1450	1590	1650	3800-3940	24	51	
	.03	889					2295	2385	2475	5700-5910	30	64	2295	2385	2475	5700-5910	30	64	

Reference order ⬟ ● ■ ▼ ▲

10215.XX.WS.XX.XX.XX.X.XX.XX.XX

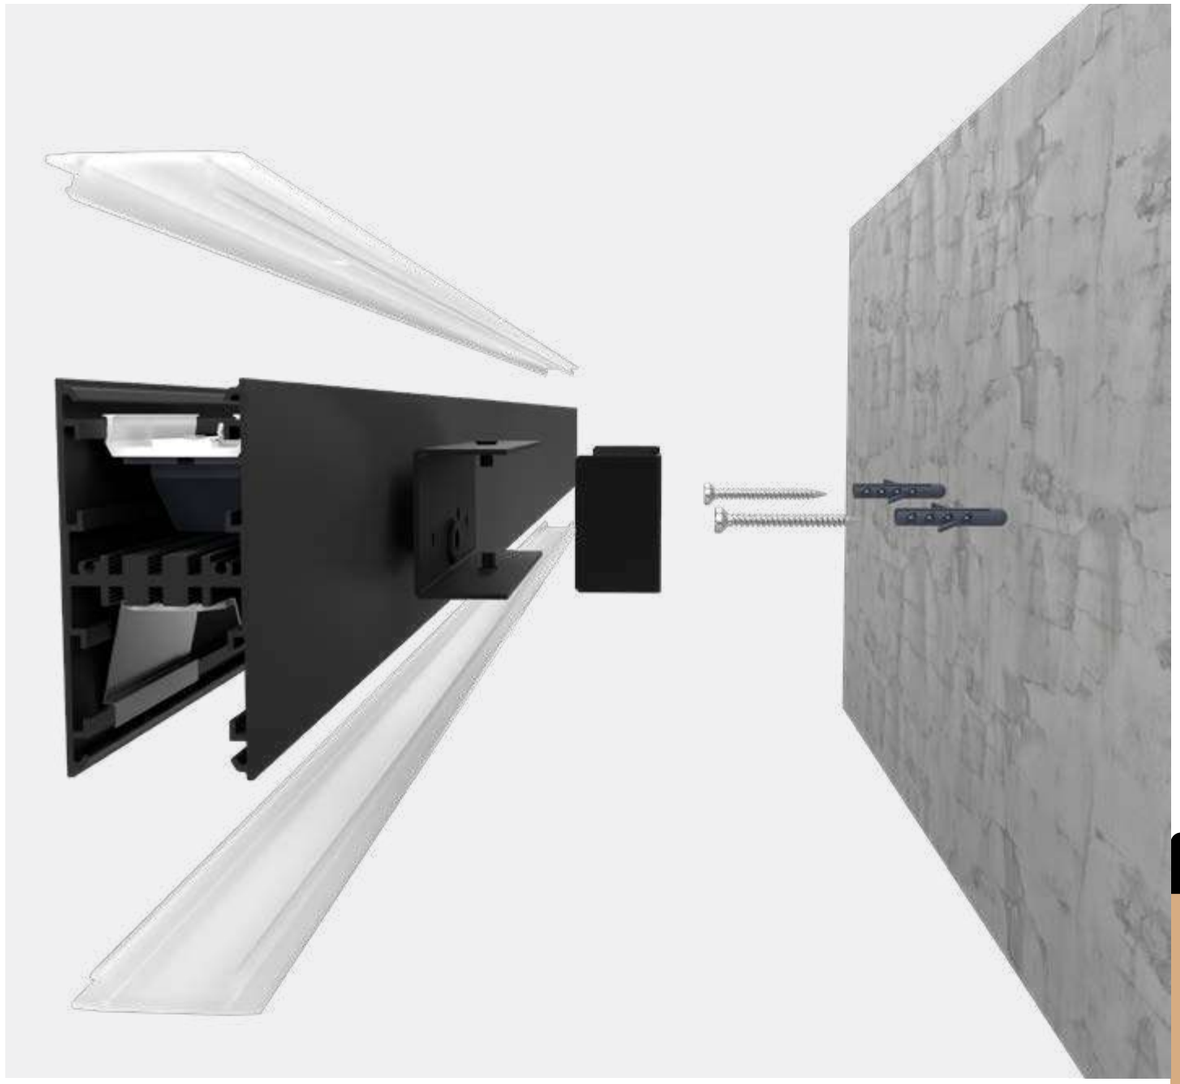

WALL SURFACE

● Select finish






ALBA DOUBLE

REF 10215.WS

PHOTOMETRY




OPAL MICROPRISMATIC

INCLUDED



PROFILE




*1 Tunable White (.TW) values correspond to 2700K and 6500K - .TW is only available for DALI dimmable (.DA), CRI 80 (.8) 700mA. *Los valores del blanco dinámico (.TW) corresponden a 2700K y 6500K. -.TW solo está disponible con protocolo DALI (.DA), CRI 80 (.8) 700mA.*

*2 Uplight (.UP) is only available for ON-OFF and DALI dimmable (.DA) options, both in 24VdC. *La luz indirecta está solo disponible para versiones on-off y regulación DALI (.DA), ambas en 24VdC.*

*3 Uplight (.UP) Tunable White (.TW) is defaulted with remote control. When requested with DALI protocol (.DA), consult with the sales team. *La luz indirecta (.UP) en blanco dinámico (.TW) viene predeterminada con mando a distancia. Si se pide con protocolo DALI (.DA), consultar con el equipo comercial.*

*4 Down light (direct light) works at 500mA. *La luz directa trabaja a 500mA.*

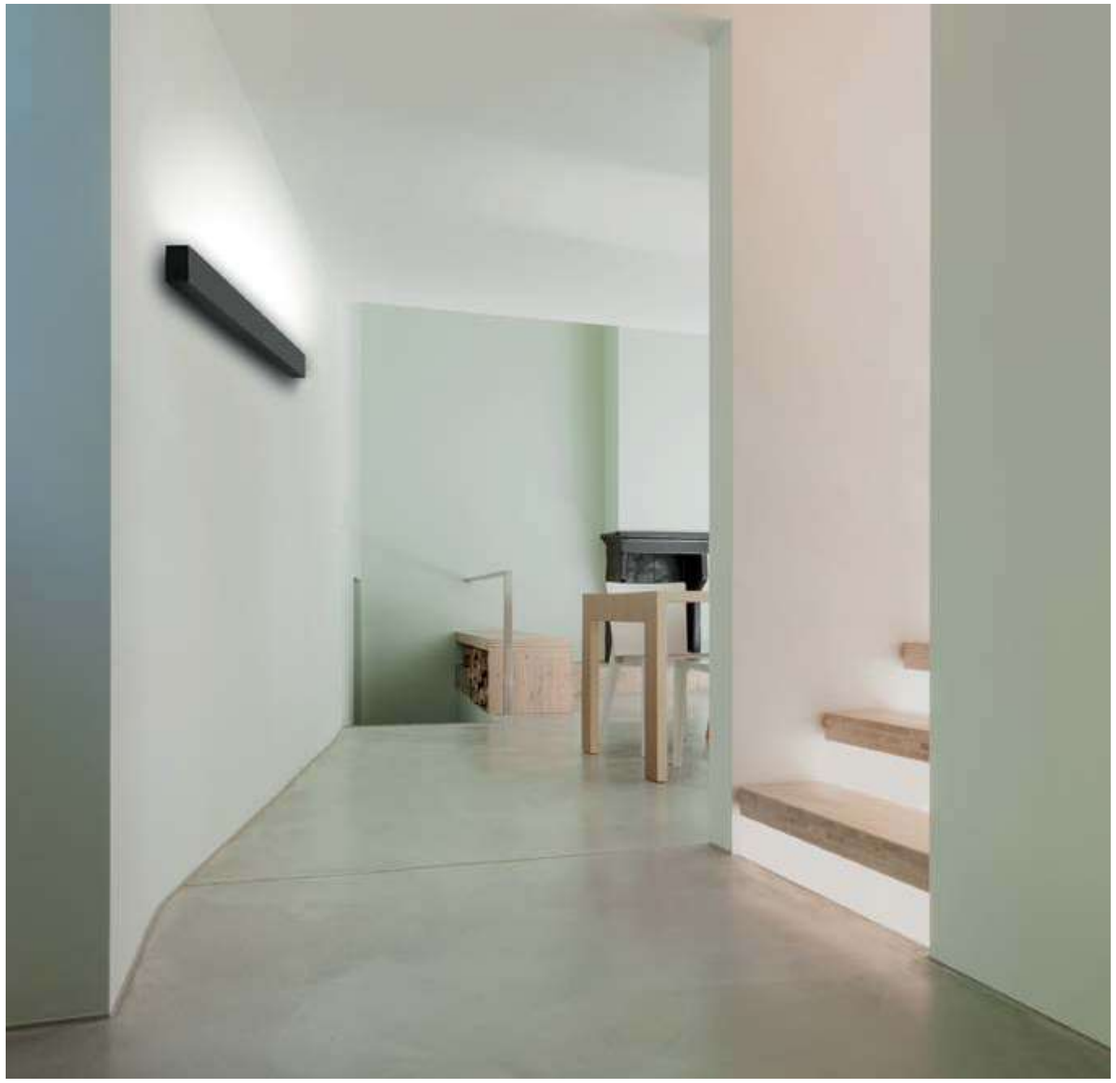

FINISHES

● COLORS

DIMENSIONS

⬟ LENGTHS mm.

307 | 588 | 869

LIGHTING OPTIONS

■ DIFFUSERS

-

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

ASYMETRIC DOWN

LUMINAIRE INCLUDES

Wall surface mounting kit



ON DEMAND

Emergency Lighting*
Well-Certified LED Boards
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

INSTALLATIONS



ALBA
ASIMETRIC

REF 210009.WS



.PN
PENDANT

·210009 ALBA ASIMETRIC
| PN - Pag. 175

.WS
WALL SURFACE

·210009 ALABA ASIMETRIC
| WS - Pag. 175

.SR
SURFACE


·210009 ALBA ASIMETRIC
| SR - Pag. 175

.RF
RECESSED FRAME

·210009 ALBA ASIMETRIC
| RF - Pag. 175

.TR
TRIMLESS

·210009 ALBA ASIMETRIC
| TR - Pag. 175






REF.	DIMENSION ⬟	MM	FINISH ●	DIFFUSER ■	POWER	CRI	DOWNLIGHT | LUMEN .27	.30	.40	.TW*2	WATT K	TW	DIMM ▼
210009	.01	307	●	.OP .MP	.ST	.9	2295	2385	2475	5700-5910	18	38	.DA .PU .D1
	.02	588					3060	3180	3300	7600-7880	24	51	
	.03	869					3825	3975	4125	9500-9850	30	64	

REF.	DIMENSION ⬟	MM	FINISH ●	DIFFUSER ■	POWER	CRI	DOWNLIGHT | LUMEN .27	.30	.40	WATT	DIMM ▼
210009	.01	307	●	.OP .MP	.HI	.9	4590	4767	4956	35	.DA .PU .D1
	.02	588					6120	6356	6608	47	
	.03	869					7650	7945	8260	59	

Reference order | 210009.XX.WS.XX.XX.XX.X.XX.XX.XX

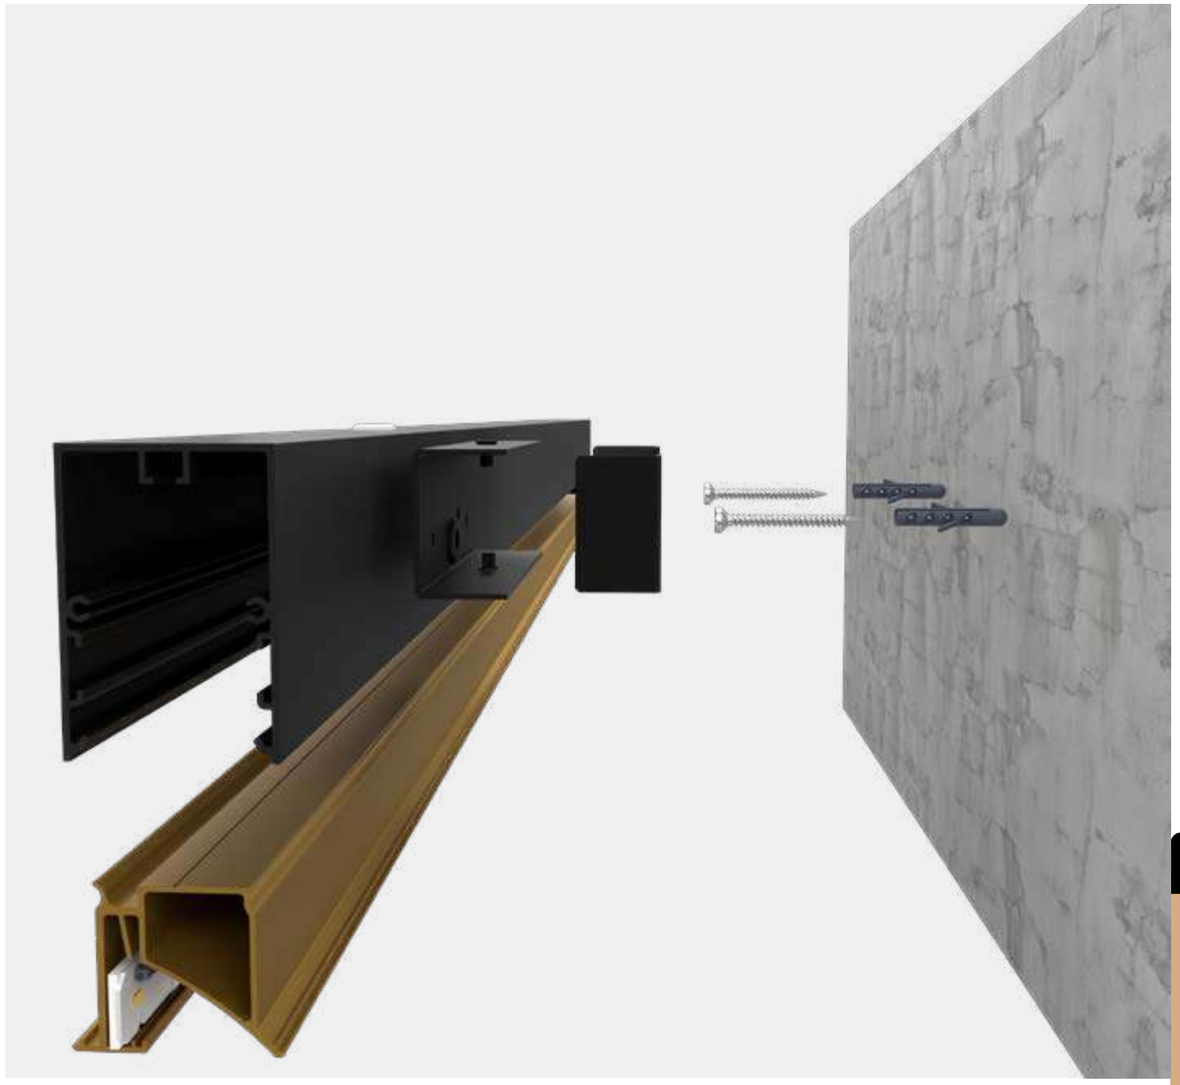

WALL SURFACE

- Select finish





ALBA
ASIMETRIC

REF 210009.WS

PHOTOMETRY

INCLUDED



*1 Tunable White (.TW) values correspond to 2700K and 6500K - .TW is only available for DALI dimmable (.DA), CRI 80 (.8) 700mA. *Los valores del blanco dinámico (.TW) corresponden a 2700K y 6500K.*
-.TW solo está disponible con protocolo DALI (.DA), CRI 80 (.8) 700mA.
*2 Down light (direct light) works at 500mA. *La luz directa trabaja a 500mA.*



FINISHES

● COLORS

DIMENSIONS

⬟ LENGTHS mm.

307 | 588 | 869

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS


DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

UP

LUMINAIRE INCLUDES

Wall surface mounting kit

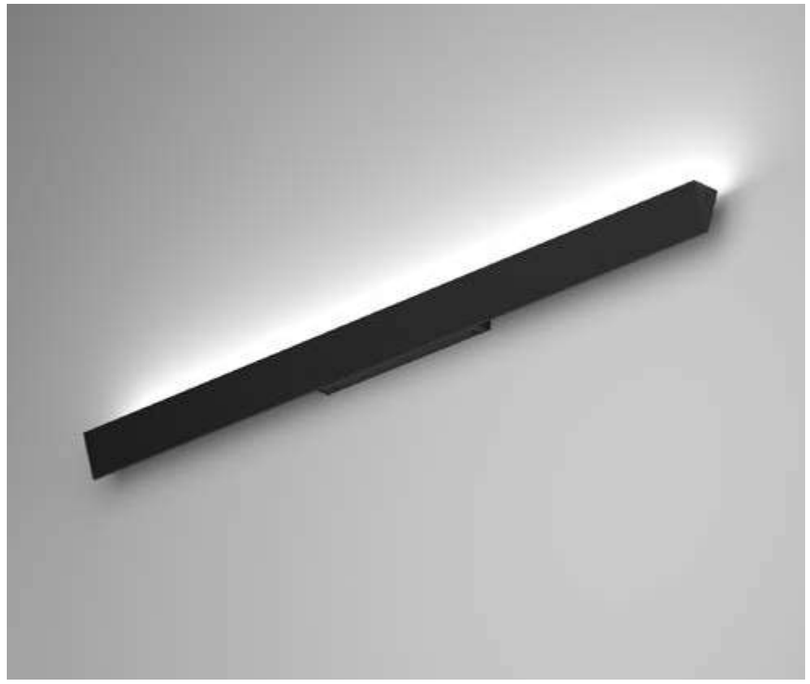

ON DEMAND

Emergency Lighting *
Motion Detection
Well-Certified LED Boards
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).

INSTALLATIONS



ALZIRA

REF 10169.WS




.PN
PENDANT

·10169 ALZIRA | PN
Pag. 175

.WS
WALL SURFACE

·10169 ALZIRA | WS
Pag. 175






REF.	DIMENSION ⬟	MM	FINISH ●	DIFFUSER ■	POWER	CRI	DOWNLIGHT | LUMEN .27	.30	.40	WATT	DIMM ▼
10169	.01	307	●	.OP .MP	.ST	.9	765	795	825	6	.DA .PU .D1
	.02	588					1530	1590	1650	12	
	.03	869					2295	2385	2475	18	

REF.	DIMENSION ⬟	MM	FINISH ●	DIFFUSER ■	POWER	CRI	DOWNLIGHT | LUMEN .27	.30	.40	WATT	DIMM ▼
10169	.01	307	●	.OP .MP	.HI	.9	1530	1590	1650	12	.DA .PU .D1
	.02	588					3060	3180	3300	24	
	.03	869					4590	4770	4950	36	

Reference order | 10169.XX.WS.XX.XX.XX.X.XX.XX

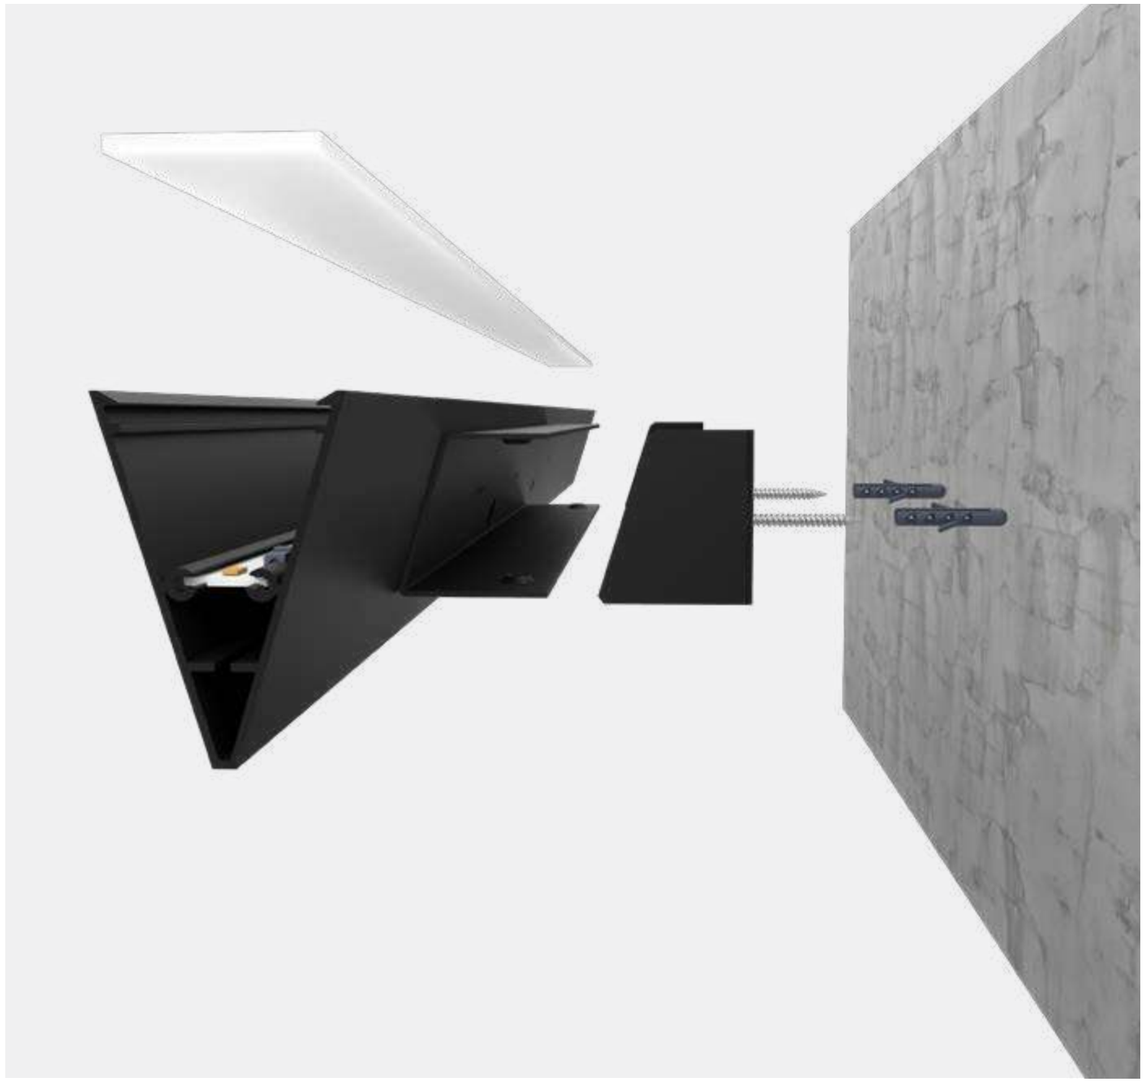

WALL SURFACE

● Select finish






ALZIRA

REF 10169.WS

PHOTOMETRY




OPAL MICROPRISMATIC

INCLUDED




COVER KIT

PROFILE




*1 Tunable White (.TW) values correspond to 2700K and 6500K - .TW is only available for DALI dimmable (.DA), CRI 80 (.8) 700mA. *Los valores del blanco dinámico (.TW) corresponden a 2700K y 6500K. -.TW solo está disponible con protocolo DALI (.DA), CRI 80 (.8) 700mA.*

*2 Down light (direct light) works at 500mA. *La luz directa trabaja a 500mA.*

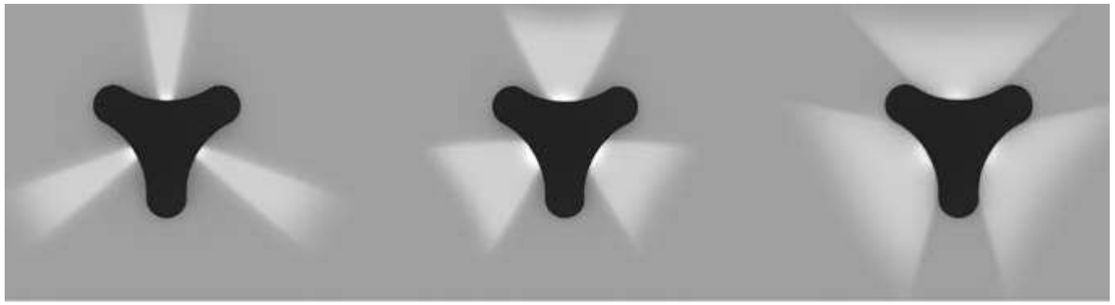



GLIM	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POW-ER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	410004	.01	.WH-WH .BK-BK	LED	.OP	.ST	.9	.30	XXX	XXX	XXX	-	

Reference order | 410004.XX.WS.XX.XX.XX.X.XX.XX

FINISHES

● COLORS

□ ■

DIMENSIONS

⬟ SIZES

.01

LIGHTING OPTIONS

■ DIFFUSERS

OPAL

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

3000K

▼ DIMMABLE OPTIONS

-

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

Wall surface mounting kit

new



WALL SURFACE

INSTALLATIONS



GLIM

REF 410004.WS



.WS
WALL SURFACE


410004 GLIM | WS
Pag. 175









KUU	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POW-ER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	410014	.01	.WH-WH .BK-BK	LED	.OP	.ST	.9	.30	XXX	XXX	XXX	-	

Reference order | 410014.XX.WS.XX.XX.XX.X.XX.XX

FINISHES

● COLORS

DIMENSIONS

⬟ SIZES

.01

LIGHTING OPTIONS

■ DIFFUSERS

OPAL

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

3000

▼ DIMMABLE OPTIONS

-

▲ LIGHT DISTRIBUTION

UP - DOWN

LUMINAIRE INCLUDES

Wall surface mounting kit



new

.WS
WALL SURFACE

410014 KUU | WS
Pag. 175

WALL SURFACE

INSTALLATIONS



KUU



REF 410014.WS









HURY	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POW-ER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	**10251**	**.01**	**.WH-WH**	**LED**	**.OP**	**.ST**	**.9**	**.30**	XXX	XXX	XXX	**.DA .PU .D1**	 320
	**10251**	**.02**	**.WH-WH**	**LED**	**.OP**	**.ST**	**.9**	**.30**	XXX	XXX	XXX	**.DA .PU .D1**	 520
	**10251**	**.03**	**.WH-WH**	**LED**	**.OP**	**.ST**	**.9**	**.30**	XXX	XXX	XXX	**.DA .PU .D1**	 720

Reference order | 10251.XX.WS.XX.XX.XX.X.XX.XX

FINISHES

● COLORS

□ ■

DIMENSIONS

⬟ LENGTHS mm.

320 | 520 | 720

LIGHTING OPTIONS

■ DIFFUSERS

OPAL

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

3000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION


ADJUSTABLE

LUMINAIRE INCLUDES

Wall surface mounting kit

new





WALL SURFACE

INSTALLATIONS



HURY

REF 10251.WS



.WS
WALL SURFACE


10251 HURY | WS
Pag. 175









IKI	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POW-ER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	9011	.01	.WH-WH	LED	.OP	.ST	.8	.30	1032	6	300	-	

Reference order | ⬟ ● ■

9011.XX.WS.XX.XX.XX.X.XX

FINISHES

● COLORS

□

DIMENSIONS

⬟ SIZES

.01

LIGHTING OPTIONS

■ DIFFUSERS

OPAL

POWER

STANDARD

CRI

80

COLOR TEMPERATURE

3000K

▼ DIMMABLE OPTIONS

-

▲ LIGHT DISTRIBUTION

UP - DOWN

LUMINAIRE INCLUDES

Wall surface mounting kit



WALL SURFACE

INSTALLATIONS



IKI

REF 9011.WS



.WS
WALL SURFACE

9011 IKKI | WS
Pag. 175









ELENA	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POW-ER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	8106	.01	.WH-WH .BK-BK	LED	.OP	.ST	.8	.30	269	3	700	-	

Reference order | 8106.XX.WS.XX.XX.XX.X.XX

FINISHES

● COLORS

DIMENSIONS

⬟ SIZES

.01

LIGHTING OPTIONS

■ DIFFUSERS

OPAL

POWER

STANDARD

CRI

80

COLOR TEMPERATURE

3000

▼ DIMMABLE OPTIONS

-

▲ LIGHT DISTRIBUTION

AJUSTABLE

LUMINAIRE INCLUDES

Wall surface mounting kit



WALL SURFACE

INSTALLATIONS



ELENA

REF 8106.WS



.WS
WALL SURFACE

8106 ELENA | WS
Pag. 175





FINISHES

● COLORS

DIMENSIONS

⬟ SIZES

.01

LIGHTING OPTIONS

■ DIFFUSERS

OPAL

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

3000K

▼ DIMMABLE OPTIONS


-

▲ LIGHT DISTRIBUTION

ADJUSTABLE

LUMINAIRE INCLUDES

Wall surface mounting kit

OKUMA	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POW-ER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	8105	.01	.WH-WH .BK-BK .SA-SA	LED	.OP	.ST	.8	.30	120	3	700	-	

Reference order | 8105.XX.WS.XX.XX.XX.X.XX

INSTALLATIONS



OKUMA

REF 8105.WS



.WS
WALL SURFACE

8105 OKUMA | WS
Pag. 175



KAPI	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POW-ER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	9000	.01	.WH-WH	LED	.OP	.ST	.9	.30	250	10.8	350	.DA .PU .D1	50 150 150
	9000	.02	.WH-WH	LED	.OP	.ST	.9	.30	500	10.8	350	.DA .PU .D1	50 300 150
	9000	.03	.WH-WH	LED	.OP	.ST	.9	.30	1000	10.8	350	.DA .PU .D1	50 500 150

Reference order | 9000.XX.WS.XX.XX.XX.X.XX.XX

FINISHES

● COLORS

□

DIMENSIONS

⬟ LENGTHS mm.

150 | 300 | 500

LIGHTING OPTIONS

■ DIFFUSERS

OPAL

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

3000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

UP - DOWN

LUMINAIRE INCLUDES

Wall surface mounting kit



WALL SURFACE




KAPI

REF 9000.WS

.WS
WALL SURFACE

9000 KAPI | WS
Pag. 175

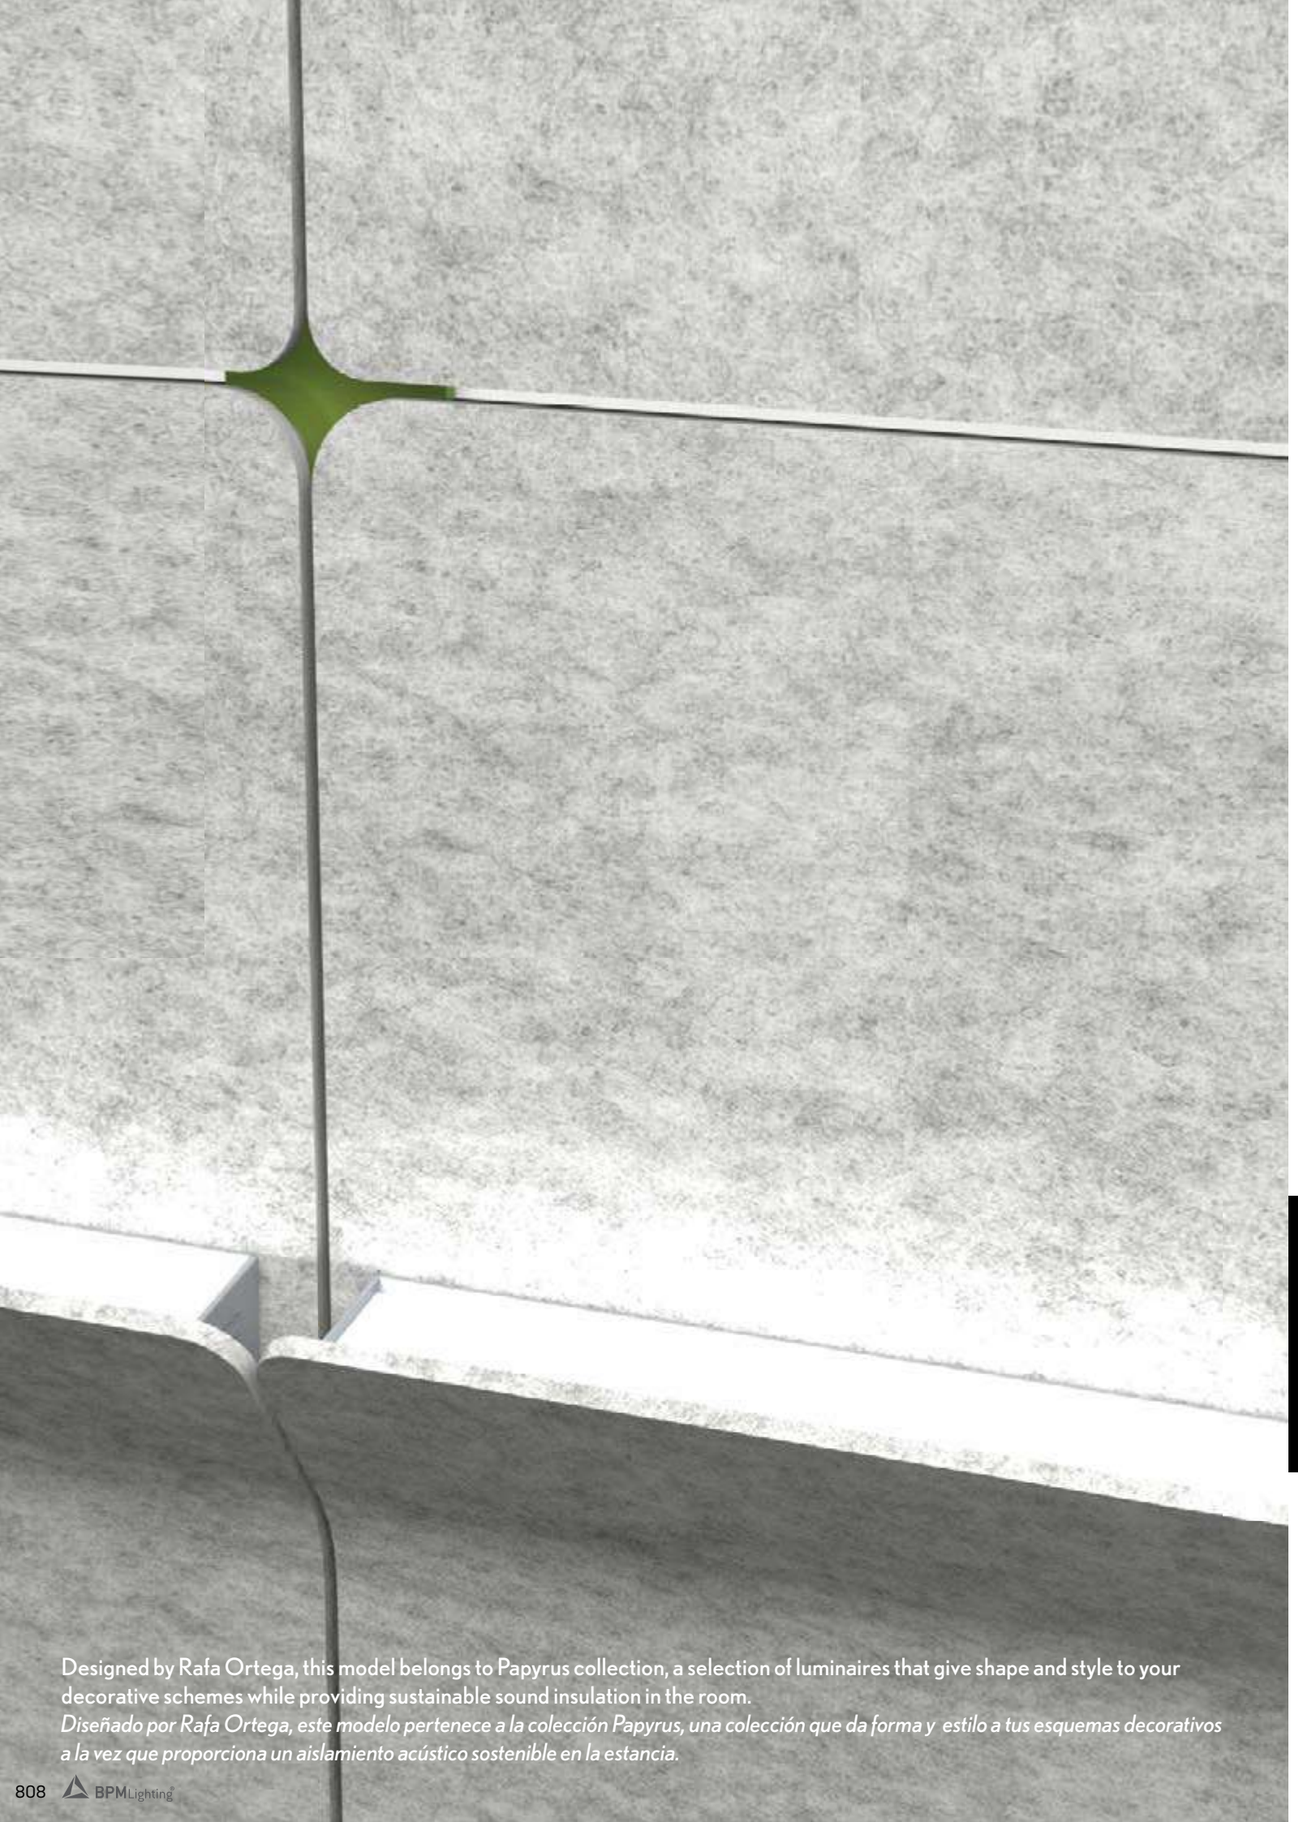

Designed by Rafa Ortega, this model belongs to Papyrus collection, a selection of luminaires that give shape and style to your decorative schemes while providing sustainable sound insulation in the room.
Diseñado por Rafa Ortega, este modelo pertenece a la colección Papyrus, una colección que da forma y estilo a tus esquemas decorativos a la vez que proporciona un aislamiento acústico sostenible en la estancia.

FINISHES

● ACOUSTIC COLORS

● PROFILE COLORS

DIMENSIONS

⬟ LENGTHS mm.

1170

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH


▲ LIGHT DISTRIBUTION

UP

LUMINAIRE INCLUDES

Diffuser

new

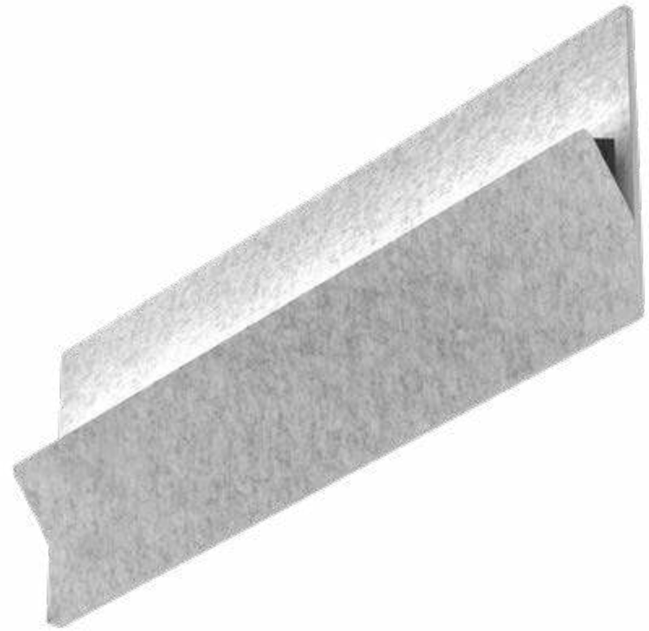

ON DEMAND

Emergency Lighting*
Motion Detection
Well-Certified LED Boards
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).

ALUMINIUM PC | 0° | 0° | CRI ≥90 | IK06
IP20 / IP40 | LIFE 50000H | DIM OPTIONAL | | INTEGRATED
INDOOR | | | 220-240 V 50-60 Hz | CE

ACOUSTIC ALZIRA WS

Designed by Rafa Ortega

REF 230002.WS








REF.	DIMENSION ⬟	FINISH ●		DIFFUSER ■	POWER	CRI	DOWNLIGHT * | LUMEN .27	.30	.40	WATT K	TW	DIMM ▼
230002	**.01** 1170mm	**.50** **.51**	**WH** **BK**	**.OP** **.MP**	.ST	.9	3060	3180	3300	24	51	**.DA** **.PU** **.D1**


Reference order ⬟ ● ■ ▼

230002.XX.WS.XX-XX.XX.XX.9.XX.XX

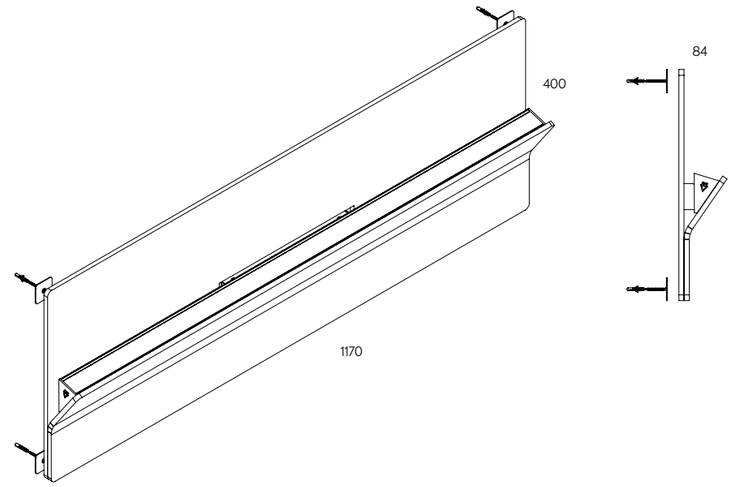

WALL SURFACE

- Select Acoustic finishes



.50 .51

- Select Profile finishes



.WH .BK



ACOUSTIC ALZIRA WS


Designed by Rafa Ortega

REF 230002.WS

ACOUSTIC PROPERTIES

ENVIRONMENTAL:	Comply with the requirements detailed in the BREEAM International, BREEAM-NOR v6.0 and LEED v4.1. Standards
FIRE TEST:	Classification B-s1, d0 and CTEDB-SI Compliant
BAFFLE THIKNESS:	190 Kg/m^3
BABBLE DENSITY:	12mm
SOUND ABSORPTION COEFFICIENT:	0,92 αw

PHOTOMETRY




OPAL MICROPRISMATIC

INCLUDED



COVERT KIT

PROFILE





FINISHES


- ACOUSTIC COLORS

DIMENSIONS


- SIZES mm.

Ø80	Ø100	Ø120
80x80	100x100	120x120


new

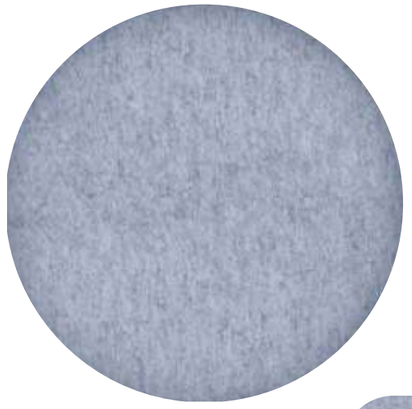





.WS



.WS

WALL SURFACE

ACOUSTIC ACCESORIES
RD | SQ PANEL

REF AC.RD | AC.SQ



Ø80mm | 80x80mm | Ø100mm | 100x100mm | Ø120mm | 120x120mm



new

FINISHES

- COLORS





DIMENSIONS

- DIAMETERS mm.

300x1200	600x1200



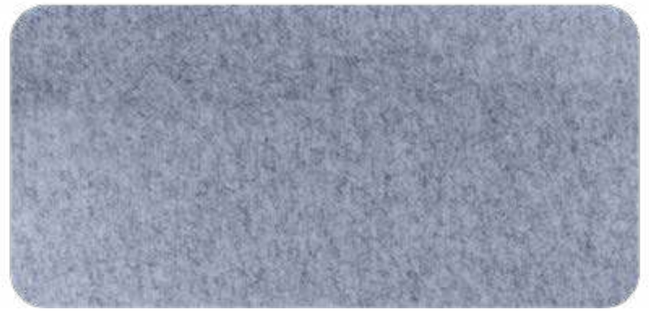



ON DEMAND

XXXXX

.WS

WALL SURFACE

ACOUSTIC ACCESORIES
FL PANEL


REF AC.FL



300 x 1200mm



600 x 1200mm

WALL METIS	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10098	.01	●	GU5.3	.G5	GU5.3	-			8	-		
				GU10	.GU	GU10							
				LED	.40 .60	.ST BPM50	.9	.27	680	7	350	.DA .PU .D1	
								.30	750				
								.40	780				
						.HI BPM300		.27	712	10	500		
								.30	750				
								.40	825				

LUMINAIRE INCLUDES

With opal optic cover.
Con difusor opal.

Recessed with frame mounting kit

Reference order | ⬟ ● ■ ▼ 10098.01.WS.XX.XX.XX.X.XX.XX



• FINISHES

□

⬟ DIMENSIONS

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN



● Select finishes

.WH-WH

CRISMOSIL | 0° | 0° | CRI ≥90 | IK06 | IP20 IP40 | LIFE 50000H | DIM OPTIONAL | | INTEGRATED | INDOOR | | 220-240 V 50-60 Hz | CE


WALL METIS

REF 10098.WS

PHOTOMETRY



40º 60º


WALL ELARA	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10097	.01	●	LED	.OP	.ST	.9					.DA .PU .D1	
								.30	930	8	350		
								.40	1020				
						.HI							
								.30	1938	16	700		
								.40	2077				

LUMINAIRE INCLUDES

With opal optic cover.
Con difusor opal.

Recessed with frame mounting kit

Reference order | ⬟ ● ■ ▼ 10097.XX.WS.XX.XX.XX.9.XX.XX

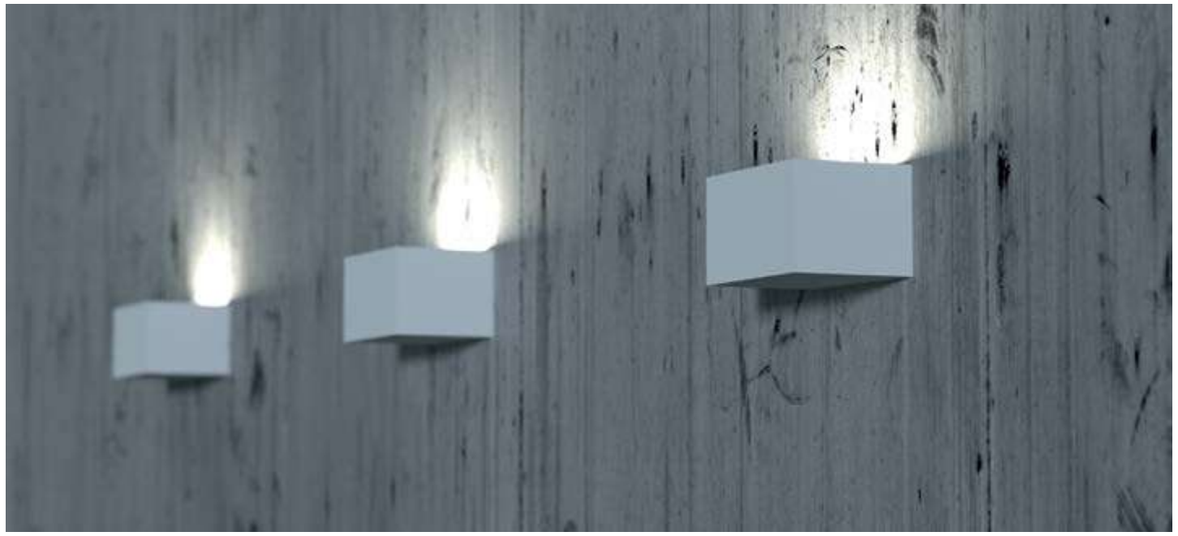

• FINISHES

⬟ DIMENSIONS

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN



WALL SURFACE

.WS


● Select finishes


.WH-WH




WALL
ELARA

REF 10097.WS

WALL TEBE	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10096	.01	●	LED	.OP	.ST	.9	.27		3	500	.DA .PU .D1	
								.30	430				
								.40	450				
						.HI		.27		6	500		
								.30	870				
								.40	910				

WALL TEBE	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10096	.02	●	LED	.OP	.ST	.9	.27		3	500	.DA .PU .D1	
								.30	430				
								.40	450				
						.HI				6	500		
								.30	870				
								.40	910				

WALL TEBE	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10096	.03	●	LED	.OP	.ST	.9	.27	820	6	500	.DA .PU .D1	
								.30	870				
								.40	910				
						.HI		.27	1640	12	500		
								.30	1730				
								.40	1817				

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Con difusor opal. / *2700K sólo disponible en 10094.
*With opal optic cover. / *2700K only available in 10094.*

Reference order | 10096.XX.WS.XX.XX.XX.9.XX.XX

• FINISHES

□

⬟ DIMENSIONS

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

40º | 60º

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN



.WS

WALL SURFACE

● Select finishes





.WH-WH




WALL
TEBE

REF 10096.WS

WALL LEDA	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10051	.01	●	LED	.OP	.ST	.9	.27	820	6	500	.DA .PU .D1	
								.30	870				
								.40	910				
						.HI		.27	1640	12	500		
								.30	1730				
								.40	1817				

WALL LEDA	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10051	.02	●	LED	.OP	.ST	.9	.27	1640	12	500	.DA .PU .D1	
								.30	1740				
								.40	1820				
						.HI		.27	3280	24	500		
								.30	3460				
								.40	3634				

WALL LEDA	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10051	.03	●	LED	.OP	.ST	.9	.27	2460	18	500	.DA .PU .D1	
								.30	2610				
								.40	2730				
						.HI		.27	4920	36	500		
								.30	5190				
								.40	5452				

Con difusor opal.
With opal optic cover.

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order | 10051.XX.WS.XX.XX.XX.9.XX.XX

• FINISHES

□

⬟ DIMENSIONS

.01 | .02

LIGHTING OPTIONS

■ DIFFUSERs

OPAL

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN



.WS

WALL SURFACE


● Select finishes


.WH-WH


CRISMOSIL · 0° · 0° · CRI ≥90 · IK06 · IP20 IP40 · LIFE 50000H · DIM OPTIONAL · INTEGRATED · INDOOR · 220-240 V 50-60 Hz · CE

WALL LEDA

REF 10051.WS

WALL ARCE	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10055	.01	●	LED	.OP	.ST	.9	.27	820	6	500	.DA .PU .D1	
								.30	870				
								.40	910				
						.HI		.27	1640	12	500		
								.30	1730				
								.40	1817				

WALL ARCE	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10055	.02	●	LED	.OP	.ST	.9	.27	1640	12	500	.DA .PU .D1	
								.30	1740				
								.40	1820				
						.HI		.27	3280	24	500		
								.30	3460				
								.40	3634				

WALL ARCE	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10055	.03	●	LED	.OP	.ST	.9	.27	2460	18	500	.DA .PU .D1	
								.30	2610				
								.40	2730				
						.HI		.27	4920	36	500		
								.30	5190				
								.40	5452				

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Con difusor opal.
With opal optic cover.

Reference order | 10055.XX.WS.XX.XX.XX.9.XX.XX

• FINISHES

□

• DIMENSIONS

.01 | .02

LIGHTING OPTIONS

■ DIFFUSER

OPAL | -

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN



.WS

WALL SURFACE

• Select finishes





.WH-WH




WALL ARCE

REF 10055.WS

WALL CARPO	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10059	.01	●	LED	.OP	.ST	.9	.27	820	6	500	.DA .PU .D1	
								.30	870				
								.40	910				
						.HI		.27	1640	12	500		
								.30	1730				
								.40	1817				

WALL CARPO	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10059	.02	●	LED	.OP	.ST	.9	.27	1640	12	500	.DA .PU .D1	
								.30	1740				
								.40	1820				
						.HI		.27	3280	24	500		
								.30	3460				
								.40	3634				

WALL CARPO	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10059	.03	●	LED	.OP	.ST	.9	.27	2460	18	500	.DA .PU .D1	
								.30	2610				
								.40	2730				
						.HI		.27	4920	36	500		
								.30	5190				
								.40	5452				

Con difusor opal.
With opal optic cover.

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order | 10059.XX.WS.XX.XX.XX.9.XX.XX

• FINISHES

□

⬟ DIMENSIONS

.01 | .02

LIGHTING OPTIONS

■ DIFFUSER

OPAL

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE


2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

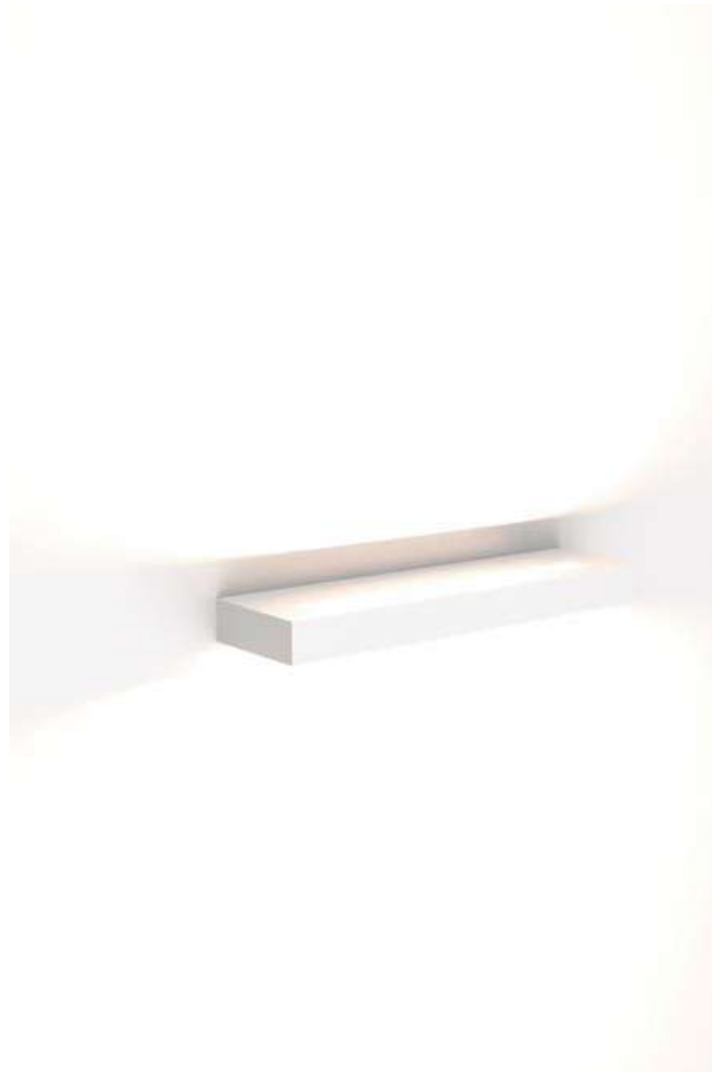

.WS

WALL SURFACE

● Select finishes




.WH-WH



WALL CARPO

REF 10055.WS

WALL ZEN OUT	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	11600	.01	.CEM	LED	.OP	.ST	.9	.27	-	9	400	.DA .PU .D1	
								.30	511				
								.40	683				

WALL ZEN OUT	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	11600	.02	.CEM	LED	.OP	.ST	.9	.27	-	9	400	.DA .PU .D1	
								.30	511				
								.40	683				

LUMINAIRE INCLUDES

Con difusor opal.
With opal optic cover.

Recessed with frame mounting kit

Reference order | ⬟ ● ■ ▼

11600.XX.OUT.XX.XX.XX.9.XX.XX

• FINISHES

□

⬟ DIMENSIONS

.01 | .02

LIGHTING OPTIONS

■ DIFFUSER

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION


DOWN







WALL
ZEN OUT

REF 11600.OUT

WALL ZEN SQ OUT	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	11601	.01	.CEM	LED	.OP	.ST	.9	.27	-	9	400	.DA .PU .D1	
								.30	511				
								.40	683				

WALL ZEN SQ OUT	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	11601	.02	.CEM	LED	.OP	.ST	.9	.27	-	9	400	.DA .PU .D1	
								.30	511				
								.40	683				

LUMINAIRE INCLUDES

Con difusor opal.
With opal optic cover.

Recessed with frame mounting kit

Reference order | ⬟ ● ■ ▼ 11601.XX.OUT.XX.XX.XX.9.XX.XX

• FINISHES

□

⬟ DIMENSIONS

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN





CRISMOSIL | CRI ≥90 | A+ | IP20 | LIFE 50000H | DIM OPTIONAL | INC. | INDOOR | CE

WALL
ZEN SQ OUT

REF 11601.OUT

WALL RECESSED

VISUAL INDEX

ORBIT

ORBIT

10091 PAG. XXX

ORBIT SQ

10090 PAG. XXX

ORBIT NADIR

10113 PAG. XXX

ORBIT NADIR SQ

10114 PAG. XXX

ORBIT ARA

10006 PAG. XXX

LYRA

10560 PAG. XXX

TYRA

10561 PAG. XXX

MYRA

10564 PAG. XXX

DRACO

DRACO

10119 PAG. XXX

DRACO TUCANA

10008 PAG. XXX

DRACO ZAHARA

10009 PAG. XXX

DRACO ORION

10011 PAG. XXX

WALL OUT



WALL ARA OUT

10006 PAG. XXX



WALL ZAHARA OUT

10009 PAG. XXX



WALL DRACO OUT

10119 PAG. XXX

WALL LIGHTS



ADIMA

8104 PAG. XXX



ADIMA SQ

8103 PAG. XXX



MAGRIT

20127 PAG. XXX

KLEE

20128 PAG. XXX

KLEE SQ

20129 PAG. XXX

• FINISHES

□

• DIMENSIONS

.01 | .02 |

LIGHTING OPTIONS

■ DIFFUSER

OPAL

POWER

STANDARD | HIGH

CRI

90 |

COLOR TEMPERATURE


2700K | 3000K | 4000K |

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN |

ORBIT	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10091	.01	.WH-WH	LED CITIZEN	.OP	.ST	.9	.27	295	3	350	.DA .PU .D1	
								.30	305				
								.40	320				

Con difusor opal.
With opal optic cover.

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order | 10091.01.WR.XX.OP.XX.X.XX.XX



ORBIT

REF 10091.WR

• FINISHES

□

• DIMENSIONS

.01 |

LIGHTING OPTIONS

■ BEAM ANGLE View in family specifications

XX | XX

POWER

STANDARD | HIGH

CRI

90 |

COLOR TEMPERATURE


2700K | 3000K | 4000K |

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN |

ORBIT SQ	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10090	.01	.WH-WH	LED CITIZEN		.ST	.9	.27	295	3	350	.DA .PU .D1	
								.30	305				
								.40	320				

Con difusor opal.
With opal optic cover.

LUMINAIRE INCLUDES


Recessed with frame mounting kit


Reference order | 10090.01.WR.XX.OP.XX.X.XX.XX



ORBIT SQ

REF 10090.WR

ORBIT NADIR	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10113	.01	●	LED	.OP	.ST	.9	.27	237	3	700	.DA .PU .D1	
								.30	246				
								.40	261				

ORBIT NADIR	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10113	.02	●	LED	.OP	.ST	.9	.27	237	3	700	.DA .PU .D1	
								.30	246				
								.40	261				

• FINISHES

□

⬟ DIMENSIONS

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

.WR

WALL RECESSED

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order | 10113.XX.WR.XX.XX.XX.X.XX.XX

● Select finishes





.WH-WH




ORBIT NADIR

REF 10113.WR







ORBIT NADIR SQ	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10114	.01	●	LED	.OP	.ST	.9	.27	237	3	700	.DA .PU .D1	125x205 mm
								.30	246				
								.40	261				

ORBIT NADIR SQ	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10114	.02	●	LED	.OP	.ST	.9	.27	237	3	700	.DA .PU .D1	155x245 mm
								.30	246				
								.40	261				

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order | 10114.XX.WR.XX.XX.XX.X.XX.XX

• FINISHES

□

⬟ DIMENSIONS

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

.WR

WALL RECESSED


● Select finishes

.WH-WH



ORBIT NADIR SQ

REF 10114.WR

ORBIT ARA	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	**10006**	**.01**	●	**LED**	**.OP**	**.ST**	**.9**	**.27**	237	3	700	**.DA .PU .D1**	
								.30	246				
								.40	261				

Con difusor opal.
With opal optic cover.

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order | ⬟ 10006 . ● 01 . ■ WR . XX . XX . XX . X . XX . ▼ XX



• FINISHES

□

⬟ DIMENSIONS

.01

LIGHTING OPTIONS

■ BEAM ANGLE

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

.WR

WALL RECESSED

● Select finishes





.WH-WH




ORBIT
ARA

REF 10006.WR



DRACO	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10119	.01	●	LED	.OP	.ST	.9	.27	237	3	700	.DA .PU .D1	
								.30	246				
								.40	261				

DRACO	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10119	.02	●	LED	.OP	.ST	.9	.27	237	3	700	.DA .PU .D1	
								.30	246				
								.40	261				

Con difusor opal.
With opal optic cover.

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order ⬟ ● ■ ▼

10119.XX.WR.XX.XX.XX.X.XX.XX

• FINISHES

□

⬟ DIMENSIONS

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

.WR

WALL RECESSED


● Select finishes


.WH-WH


CRISMOSIL | 0° | 0° | CRI ≥90 | IK06 | IP20 IP40 | L80B 50000H | DIM OPTIONAL | | INTEGRATED | INDOOR | | 220-240 V 50-60 Hz | CE


DRACO

REF 10119.WR





DRACO TUCANA	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10008	.01	●	LED	.OP	.ST	.9	.27		3	500	.DA .PU .D1	
								.30	430				
								.40	450				
						.HI				6	500		
								.30	870				
								.40	910				

DRACO TUCANA	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10008	.02	●	LED	.OP	.ST	.9	.27		3	500	.DA .PU .D1	
								.30	430				
								.40	450				
						.HI		.27		6	500		
								.30	870				
								.40	910				

Con difusor opal.
With opal optic cover.

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order ⬟ ● ■ ▼

10008.XX.WR.XX.XX.XX.X.XX.XX

• FINISHES

□

⬟ DIMENSIONS

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

.WR

WALL RECESSED

● Select finishes





.WH-WH





DRACO TUCANA

REF 10008.WR





DRACO ZAHARA	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10009	.01	●	LED	.OP	.ST	.9	.27		3	500	.DA .PU .D1	
								.30	430				
								.40	450				
						.HI		.30	870	6	500		
								.40	910				

DRACO ZAHARA	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10009	.02	●	LED	.OP	.ST	.9	.27		3	500	.DA .PU .D1	
								.30	430				
								.40	450				
						.HI		.30	870	6	500		
								.40	910				

Con difusor opal.
With opal optic cover.

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order ⬟ ● ■ ▼

10009.XX.WR.XX.XX.XX.X.XX.XX

• FINISHES

□

⬟ DIMENSIONS

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

.WR

WALL RECESSED


● Select finishes


.WH-WH


CRISMOSIL | 0° | 0° | CRI ≥90 | IK06 | IP20 IP40 | LIFE 50000H | DIM OPTIONAL | | INTEGRATED | INDOOR | | 220-240 V 50-60 Hz | CE

DRACO ZAHARA

REF 10009.WR





DRACO ORION	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10011	.01	●	LED	.OP	.ST	.9	.27		3	500	.DA .PU .D1	
								.30	430				
								.40	450				
						.HI		.27		6	500		
								.30	870				
								.40	910				

Con difusor opal.
With opal optic cover.

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order ⬟ ● ■ ▼

10011.XX.WR.XX.XX.XX.X.XX.XX

• FINISHES

□

⬟ DIMENSIONS

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

.WR

WALL RECESSED

● Select finishes







.WH-WH

CRISMOSIL | 0° | 0° | CRI ≥90 | IK06 | IP20 IP40 | L80B10 50000H | DIM OPTIONAL | | INTEGRATED | INDOOR | | 220-240 V 50-60 Hz | CE

DRACO ORION

REF 10011.WR

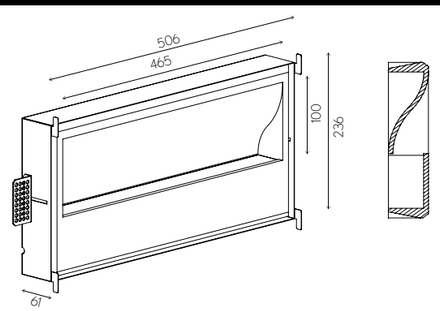

LYRA	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10560	.01	●	LED	.40 .60	.ST	.9	.27	680	7	350	.DA .PU .D1	
								.30	750				
								.40	780				
						.HI		.27	713	10	500		
								.30	750				
								.40	825				
	10560	.02	●	LED	.40 .60	.ST	.9	.27	680	7	350	.DA .PU .D1	
								.30	750				
								.40	780				
						.HI		.27	713	10	500		
								.30	750				
								.40	825				
	10560	.03	●	LED	.40 .60	.ST	.9	.27	680	7	350	.DA .PU .D1	
								.30	750				
								.40	780				
						.HI		.27	713	10	500		
								.30	750				
								.40	825				

Con difusor opal.
With opal optic cover.

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order | 10560.XX.WR.XX.XX.XX.X.XX.XX

• FINISHES

□

• DIMENSIONS

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN



.WR

WALL RECESSED

● Select finishes






.WH-WH



LYRA

REF 10560.WR

TYRA	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	**10561**	**.01**	●	**LED**	**.40** **.60**	**.ST**	**.9**	**.27**	237	3	700	**.DA** **.PU** **.D1**	
								.30	246				
								.40	261				
	**10561**	**.02**	●	**LED**	**.40** **.60**	**.ST**	**.9**	**.27**	237	3	700	**.DA** **.PU** **.D1**	
								.30	246				
								.40	261				
	**10561**	**.03**	●	**LED**	**.40** **.60**	**.ST**	**.9**	**.27**	237	3	700	**.DA** **.PU** **.D1**	
								.30	246				
								.40	261				

Con difusor opal.
With opal optic cover.

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order ⬟ ● ■ ▼

10561.XX.WR.XX.XX.XX.X.XX.XX

• FINISHES

□

⬟ DIMENSIONS

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN



.WR

WALL RECESSED

• Select finishes






.WH-WH



TYRA

REF 10561.WR

MYRA	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	**10564**	**.01**	●	**LED**	**.40** **.60**	.ST	.9	**.27**	220	6	24	**.DA** **.PU** **.D1**	
								.30	240				
								.40	280				
	**10564**	**.02**	●	**LED**	**.40** **.60**	.ST	.9	**.27**	440	12	24	**.DA** **.PU** **.D1**	
								.30	480				
								.40	560				
	**10564**	**.03**	●	**LED**	**.40** **.60**	.ST	.9	**.27**	660	18	24	**.DA** **.PU** **.D1**	
								.30	720				
								.40	840				

Con difusor opal.
With opal optic cover.

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order | 10564.XX.WR.XX.XX.XX.X.XX.XX

• FINISHES

□

⬟ DIMENSIONS

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

POWER

STANDARD

CRI

90

COLOR TEMPERATURE


2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

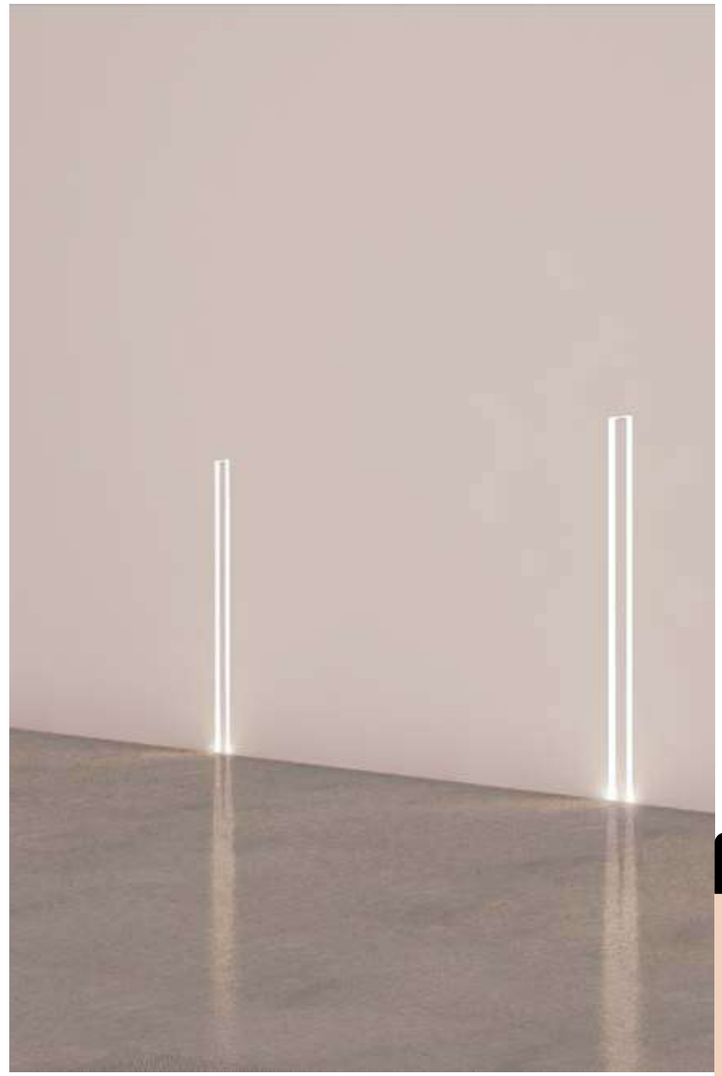

.WR

WALL RECESSED

● Select finishes



.WH-WH



MYRA

REF 10564.WR

• FINISHES

□

• DIMENSIONS

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

.38

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN



WALL ARA OUT	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10006	.01	.CEM	LED CITIZEN	.38	.ST	.9	.27	XXX	X	XXX	.DA .PU .D1	130x140 mm
								.30	XXX				
								.40	XXX				

Con difusor opal.
With opal optic cover.

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order | 10006.01.OUT.XX.OP.XX.X.XX.XX



WALL
ARA OUT

REF 10006.OUT

• FINISHES

□

• DIMENSIONS

.01

LIGHTING OPTIONS

■ BEAM ANGLE View in family specifications

XX | XX

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN



WALL ZAHARA OUT	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10009	.01	.CEM	LED CITIZEN		.ST	.9	.27	XXX	X	XXX	.DA .PU .D1	130x140 mm
								.30	XXX				
								.40	XXX				

Con difusor opal.
With opal optic cover.

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order | 10009.01.OUT.XX.OP.XX.X.XX.XX



WALL
ZAHARA OUT

REF 10009.OUT



• FINISHES

□

• DIMENSIONS

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

.38

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN



WALL DRACO OUT	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	**10119**	**.01**	**.CEM**	**LED CITIZEN**	**.38**	**.ST**	**.9**	**.27**	XXX	X	XXX	**.DA .PU .D1**	130x140 mm
								.30	XXX				
								.40	XXX				

Con difusor opal.
With opal optic cover.

LUMINAIRE INCLUDES


Recessed with frame mounting kit

Reference order | 10119.01.OUT.XX.OP.XX.X.XX.XX




WALL
DRACO OUT

REF 10119.OUT

ADIMA	REF.	DIMEN-SION ⬟	FINISH	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	**8104**	**.01**	●	**.25**	.ST	.9	.30	154	3	700	-	

Reference order | 8104.01.WR.XX.XX.XX.X.XX

ADIMA SQ	REF.	DIMEN-SION ⬟	FINISH	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	**8103**	**.01**	●	**.25**	.ST	.9	.30	154	3	700	-	

Reference order | 8103.01.WR.XX.XX.XX.X.XX

• FINISHES

COLORS

DIMENSIONS

⬟ View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE

25º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

3000K


▼ DIMMABLE OPTIONS

-

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

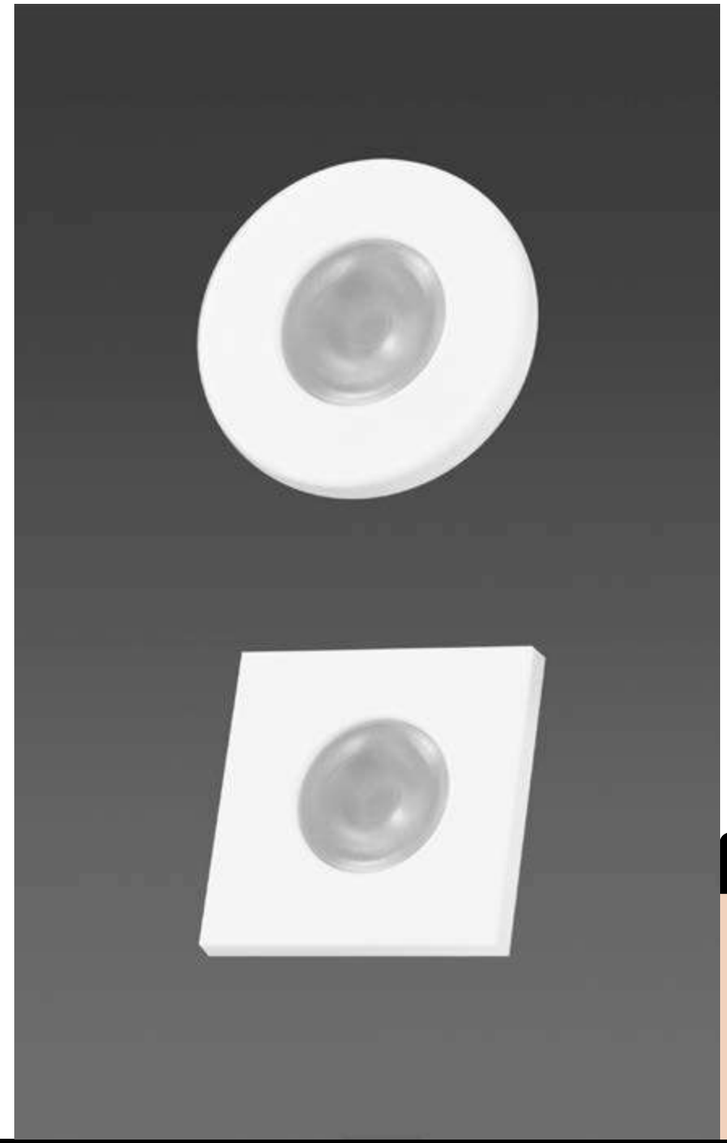

.WR

WALL RECESSED

● Select finishes



.WH-WH




ADIMA
ADIMA SQ


REF 8104.WR | 8103.WR

PHOTOMETRY


25º

MAGRIT	REF.	DIMEN-SION ⬟	FINISH	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	**20127**	**.01**	●	**.25**	.ST	.9	.30	118	2.5	500	-	

Reference order | 20127.01.WR.XX.25.ST.9.30

KLEE	REF.	DIMEN-SION ⬟	FINISH	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	**20128**	**.01**	●	**.25**	.ST	.9	.30	118	2.5	500	-	

Reference order | 20128.01.WR.XX.25.ST.9.30

KLEE SQ	REF.	DIMEN-SION ⬟	FINISH	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	**20129**	**.01**	●	**.25**	.ST	.9	.30	118	2.5	500	-	

Reference order | 20129.01.WR.XX.25.ST.9.30

• FINISHES

COLORS

DIMENSIONS

⬟ View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE

25º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

3000K

▼ DIMMABLE OPTIONS

-

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND



WALL RECESSED

.WR

MAGRIT | KLEE | SQ

REF 20127.WR | 20128.WR | 20129.WR

● Select external-internal finishes



.WH-WH .BK-BK .GC-GC



PHOTOMETRY

25º

How to create a Reference Order

Como crear la Referencia

When ordering a Florida SQ luminaire, diameter 350 mm, pendant mounting, black external-internal finish, standard power, CRI 90, 2700 K, DALI dimming and indirect light.
Si deseas pedir una luminaria Florida SQ de diámetro 350 mm, suspendida en acabado interior y exterior negro, potencia standard, CRI 90, 2700 K, regulación DALI y con luz indirecta.

FLORIDA SQ	REF.	DIMEN-SION ⬟	FINISH ●	DIFFUS-ER ■	POWER	CRI	K	DOWNLIGHT			UPLIGHT ▲.UP *1		DIMM ▼	SKETCH
								LUMEN	WATT	mA	LUMEN	WATT		
	**10191**	**.35**	**.BK-BK**	**.OP**	**.ST**	**.9**	**.27**	2706	27	700	470	7	**.DA**	

REF.35.PN.BK-BK.OP.ST.9.27.DA.UP
1 2 3 4 5 6 7 8 9 10

1 Select Luminaire's reference
Selecciona la referencia de la luminaria

⬟ **2** Choose Luminaire's dimensions | See luminaire to confirm dimension criteria
Elije las dimensiones de la luminaria | Ver luminaria para confirmar criterio de dimensiones

3 Confirm Luminaire's Installation
Confirma la instalación de la luminaria

.PN Pendant | *Suspendida*
.RF Recessed with Frame | *Empotrado con marco*
.SR Surface | *Superficie*
.TK Tracklight | *Proyector de carril*
.TR Trimless | Empotrado
.WR Wall Recessed | Empotrado en pared
.WS Wall Surface | Aplique de pared

● **4** Pick available finish options
Escoge los acabados de la luminaria

ALUMINIUM | *ALUMINIO*
.BK Black | *Negro*
.BM Blue Mint | *Azul Menta*
.BS Blue Stone | *Azul Piedra*
.BC Brown Coffee | *Marrón Café*
.CR Copper Rose | *Cobre Rosado*
.CB Coral Bronze | *Bronce Coral*
.GC Gold Cava | *Oro Cava*
.GY Gray | *Gris*
.MG Military Green | *Verde Militar*
.VC Violet Chiffon | *Violeta Chifón*
.WH White | *Blanco*
.YM Yellow Mustard | *Amarillo Mostaza*

ACOUSTIC | *ACÚSTICO*
.50 Acoustic Gray | *Gris Acústico*
.51 Acoustic Dark Gray | *Gris Oscuro Acústico*
.52 Acoustic Camel | *Camel Acústico*
.53 Acoustic Light Blue | *Azul Claro Acústico*
.54 Acoustic Dark Blue | *Azul Oscuro Acústico*
.55 Acoustic Green | *Verde Acústico*
.56 Acoustic White | *Blanco Acústico*
.57 Acoustic Black | *Negro Acústico*
.60 Acoustic Yellow | *Amarillo Acústico*
.61 Acoustic Red | *Rojo Acústico*

CEMENT | *CEMENTO*
.CEM Cement | *Cemento*

STRUCTURAL
.WH White | *Blanco*

ALUMINIUM | *ALUMINIO*
.SA Striped Aluminum | *Aluminio Rallado*

■ **5** Select optic options
Selecciona las opciones ópticas

DIFFUSERS | *DIFUSORES*
.MP Microprismatic | *Microprismático*
.OP Opal | *Opal*
.SI Silicone | *Silicona*

BEAM ANGLES | *ÁNGULOS HAZ DE LUZ*
Refer to Luminaire's light distribuition options and choose from a narrow spot to a wider flood
Consulte las opciones de distribución de la luz de las luminarias desde un punto angosto hasta una inundación más amplia

6 Choose Power options
Elige las opciones de Potencia

.HI High | *Alta*
.ST Standard | *Estándar*

7 Confirm CRI (color rendering index)
Confirma las opciones de CRI (color rendering index)

.8 80
.9 90

8 Pick Kelvin degrees
Escoge grados Kelvin

.27 2700
.30 3000
.40 4000
.TW Tunable white

▼ **9** Select dimmable options
Selecciona opciones regulación

.D1 1..10
.DA DALI
.PU PUSH / *PULSADOR*

▲ **10** Indirect light
Luz indirecta

.UP Uplight | *Luz indirecta*

STEP BY STEP

FINISHES

ALUMINIUM | *ALUMINIO*



.BK Black | *Negro*



.BC Brown Coffee | *Marrón Café*



.GC Gold Cava | *Oro Cava*



.YM Yellow Mustard | *Amarillo Mostaza*



.BM Blue Mint | *Azul Menta*



.CR Copper Rose | *Cobre Rosado*

.GY Gray | *Gris*



.VC Violet Chiffon | *Violeta Chifón*



.BS Blue Stone | *Azul Piedra*



.CB Coral Bronze | *Bronce Coral*




.MG Military Green | *Verde Militar*




.WH White | *Blanco*

ACOUSTIC | *ACÚSTICO*



.50
Acoustic Gray
Gris Acústico



.51
Acoustic Dark Gray
Gris Oscuro Acústico



.52
Acoustic Camel
Camel Acústico



.53
Acoustic Light Blue
Azul Claro Acústico



.54
Acoustic Dark Blue
Azul Oscuro Acústico



.55
Acoustic Green
Verde Acústico



.56
Acoustic White
Blanco Acústico




.57
Acoustic Black
Negro Acústico



.60
Acoustic Yellow
Amarillo Acústico



.61
Acoustic Red
Rojo Acústico



CEMENT | *CEMENTO*

.CEM
Cement | *Cemento*



ALUMINIUM | *ALUMINIO*

.SA
Striped Aluminum | *Aluminio Rallado*

STRUCTURAL

.WH
White | *Blanco*

Rectangular cut.
Agujero de corte rectangular.

Circular cut.
Agujero de corte circular.

Luminaire not suitable to be covered with thermal insulating material.
Luminaria no adecuada para cubrirse con aislante térmico.

Recessed luminaire suitable for installation on normally inflammable surfaces.
Luminaria empotrada adecuada para montaje en superficies normalmente inflamables.

Surface luminaire suitable for installation on normally inflammable surfaces.
Luminaria superficial adecuada para montaje en superficies normalmente inflamables.

IP20 / IP40
Luminaire with two different IP degrees of protection at the top and bottom.
Grado IP de la luminaria tanto por la parte superior e inferior del empotramiento de la luminaria.

220-240 V 50-60 Hz
AC input for luminaire is 220-240V / 50-60Hz.
Input AC de luminaria a 220-240V/50-60Hz.

48 V remote
DC output for luminaire is 48 V DC.
Output DC de trabajo de luminaria a 48 V DC.

REMOTE
Driver remote.
Driver remoto.

INTEGRATED
Driver integrated inside the luminaire.
Driver integrado dentro de la luminaria.

DIM OPTIONAL
Optional dimmer.
Regulador opcional.

DIM OPTIONAL
Optional remote dimmer.
Regulador remoto opcional.

Class I: Luminaire in which the protection against electric shocks falls into a protective conductor grounded.
Clase I: Luminaria en que la protección contra los choques eléctricos recae a un conductor de protección puesto a tierra.

Class II: Luminaire in which the protection against electric shocks includes additional safety features such as double insulation or reinforced insulation.
Clase II: Luminaria en que la protección contra los choques eléctricos, comprende medidas de seguridad suplementarias, tales como el doble aislamiento o el aislamiento reforzado.

Class III: Luminaire in which the protection against electric shocks falls on the power supply with very low safety voltage (SELV) and in which no voltages higher than the very low safety voltage are generated.
Clase III: luminaria en la que la protección contra los choques eléctricos recae en la alimentación con muy baja tensión de seguridad (MTBS) y en la que no se generan tensiones superiores a la muy baja tensión de seguridad.

UGR <19
Unified Glare Rating.
Índice de Deslumbramiento Unificado.

ALUMINIUM
Luminaire is made of aluminum.
Luminaria fabricada de aluminio.

ALUMINIUM SILICONE
Luminaire is made of aluminum and silicone.
Luminaria fabricada de aluminio y silicona.

STRUCTURAL
Luminaire is manufactured with trademarked material Crismosil that combines gypsum, fibreglass and acrylic resins.
La luminaria está fabricada con Crismosil, un material registrado que combina un yeso especial con fibra de vidrio y resinas acrílicas.

CEMENT
Luminaire is made out of cement.
La luminaria está fabricada con cemento.

Lamp not included.
Lámpara no incluída.

According to european directives and EN 60598.
Conforme a las directivas europeas y la norma EN 60598.

.SR
Surface.
Superficie.

.PN
Pendant.
Colgante.

.RF
Recessed with frame.
Empotrado con marco.

Only for indoor use.
Solo para uso interior.

Only for outdoor use.
Solo para uso exterior.

Indoor / outdoor use.
Uso interior / exterior.

Minimum height of the false ceiling.
Altura mínima del falso techo.

ROTATION
Rotation degrees.
Grados de giro.

ROTATION
Tilting degree.
Grados de basculación.

IK06
Protection rate against external mechanical impacts.
Grado de resistencia contra golpes mecánicos externos.

50000H
Luminaire's Lifetime.
Vida útil de la luminaria.

.TR
Trimless.
Empotrado sin marco.

.WS
Wall surface.
Aplique de pared.

.WR
Wall recessed.
Empotrado en pared.


.TK
Tracklight.
Proyector de carril.

ICON FLASH

Connecting
your equipment...

Cómo conecto?

SEVERAL FIXTURES CONNECTION TO A SINGLE CONSTANT CURRENT DRIVER

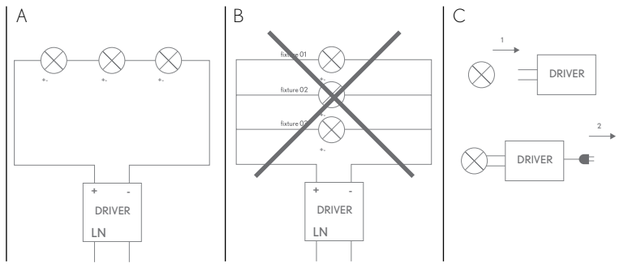

Does

When using a single driver, wire all lighting fixtures in series.
LED strips must be wired in parallel.

Dont's

Lighting fixtures must always be connected in no-voltage conditions.
The driver must not be connected to the power supply when connecting the lighting fixtures.
If there are intermediate connections, follow this diagram to avoid damaging your lighting fixtures. (Diagram)
Lighting fixtures must not be connected directly to the AC power source without a driver. Never expose lighting fixtures to heat sources or other electronic equipment.


Consideraciones

Todas nuestras luminarias cuando usan un solo driver se cablearán en serie. Las tiras de led se deberán de cablear en paralelo entre sí.

Advertencias

Las luminarias se deben de conectar siempre apagadas. No se debe de tener el driver conectado a la red encendido al conectar las luminarias. En caso de tener conexiones intermedias se debe de seguir el siguiente esquema para no dañar las luminarias. (Esquema)
No se debe de conectar la luminaria directamente al AC sin driver.
No se deben de colocar las luminarias cerca de fuentes de calor ni de otros aparatos electrónicos.

Wiring - EM converter LED BASIC with a standard LED Driver and one LED module for main and emergency operation

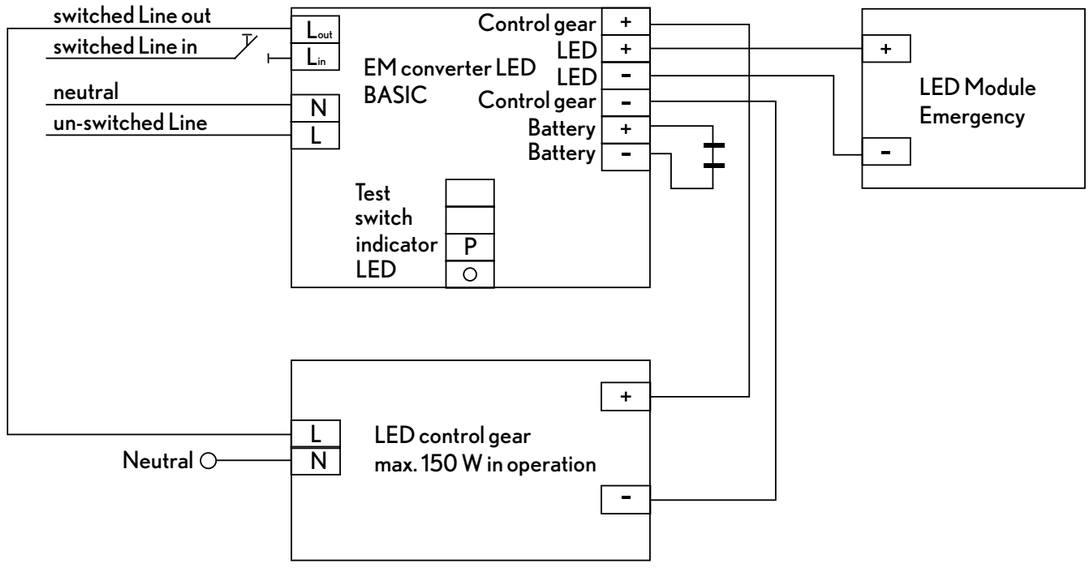

Emergency kit

There are two types of emergency lighting:
Centralised and single emergency lighting

Centralised emergency lighting

A large battery or generator supplies energy to the emergency lighting fixtures via a specially protected power supply.
In this case, the drivers have a DC recognition function that uses the input voltage to detect the emergency mode.
The driver automatically turns on the DC mode and controls the light to the set DC level.
The DC lighting level is generally 15% of nominal. When the installation enters DC mode, all the sensors stop working.

What do I need?

You only need one DC-ready driver in addition to AC-mode, which is used during normal operation of the lighting fixture. An additional battery or generally must be installed to connect the light fixture driver.

Decentralised emergency lighting

This does not have its own mains supply. An emergency kit consisting of emergency lighting equipment, a battery and LED indicator is required.

How does the emergency kit work?

The emergency kits supplied by BPM are for permanent use, and work normally with your driver and when the general mains network fails.
The emergency kit driver detects there is voltage in the network and allows the lighting fixture driver work under normal conditions. In case of a power failure in the grid, the emergency kit driver releases the energy in the battery to power the LEDs.

What do I need?

You need a lighting fixture, its driver and LEDs and an emergency kit. The battery in the emergency kit must be installed separately from the lighting fixture and there must be a space to locate it.

How many emergency kits do I need?

An emergency kit can supply one driver with less than 150W.
If the lighting fixture has more than one driver and full lighting is required, you need the same number as emergency kits as drivers in the light fixture.
If only one kit is fitted, only the part of the lighting fixture that is associated with the driver will light up.

Kit de emergencia

Existen dos tipos de iluminación de emergencia:
Iluminación de emergencia de alimentación centralizada y descentralizada

Emergencia Centralizada

Una batería grande o generador suministran la energía necesaria para la iluminación de emergencia a través de una red de suministro con una protección especial.
En este caso los drivers tienen una función de reconocimiento DC que usa el voltaje de entrada para detectar el modo de emergencia. El driver automáticamente enciende el modo DC y regula la luz al nivel definido DC. Generalmente el nivel DC de iluminación es del 15% del nominal. Cuando la instalación entra en modo DC todos los sensores dejan de funcionar.

¿Qué necesito?

Sólo se necesita un driver preparado para trabajar en modo DC además de en modo AC, que será el que se use durante el funcionamiento habitual de la luminaria. La instalación debe de estar preparada con una batería o generador adicional donde conectar el driver de la luminaria.

Emergencia Descentralizada.

No cuenta con una red de alimentación propia. Se necesita de kit de emergencia compuesto por un equipo de iluminación de emergencia, una batería y un indicador LED.

¿Cómo funciona el Kit de emergencia?


Los Kit de emergencia suministrados por BPM son de uso permanente, es decir, funciona normalmente con su driver y además cuando falla la red general.
El driver del Kit de emergencia comprueba que hay tensión en la red dejando que el driver de la luminaria trabaje en condiciones normales de utilización. Cuando hay un fallo de suministro eléctrico en la red,
el driver del kit de emergencia permite liberar la energía acumulada en la batería alimentando los LEDs.


¿Qué necesito?

Se necesita la luminaria compuesta de su driver y LEDs y un kit de emergencia. En cualquier caso, la batería de los Kit de emergencia debe de ir externa a la luminaria por lo que se debe de prever un espacio para su alojamiento

¿Cuántos kit de emergencia necesito?

Con un kit de emergencia se puede dar servicio a un solo driver de potencia inferior a 150W.
Si una luminaria lleva más de un driver y se requiere que se ilumine completamente se necesitarán tantos kits de emergencia como drivers lleve la luminaria. En este caso si sólo se coloca un kit se iluminará únicamente la parte de la luminaria que lleve asociado el driver con el kit de emergencia.

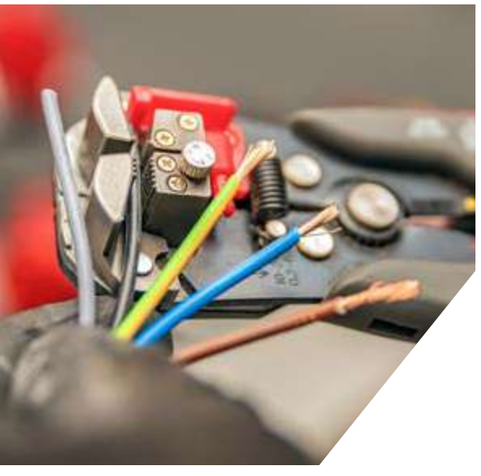

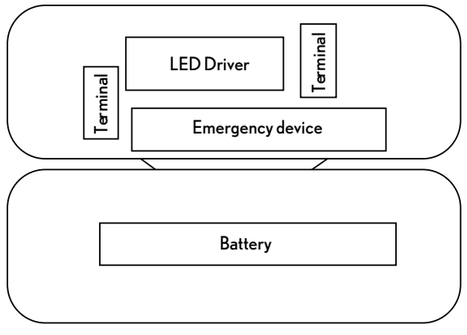

Are BPM light fixtures approved according to standard?

Please note that BPM Lighting luminaires are not in any case, emergency luminaires approved according to the EN-60598-2.22. Our emergency kits provide low anti-panic lighting for between one and three hours in case of a ma in power failure (see ref. ACKITLED1H and ref. ACKITLED3H).

¿Son las luminarias de BPM homologadas según la norma?

Las luminarias de BPM que llevan kit de emergencia en ningún caso son luminarias de emergencia homologadas según la norma
EN-60598-2-22. Los kits de emergencia suministrados permiten mantener una iluminación reducida antipánico, durante 1 o 3 horas en caso de fallos de suministro eléctrico de la red (ver ref. ACKITLED1H y ref. ACKITLED3H).

DIMMING OPTIONS

1..10V

How does it work?
The driver generates a 1V (minimum) to 10V (maximum) analogue signal a dimmer switch controller.
Dimming from 1 to 100%.
What do I need?
You need an L and N power source plus two control cables with + and – polarity and a compatible 1. 10V controller.
To switch off, install an ON-OFF switch with a 0.10V driver.
Can I dim the lights in more than one place?
It is not possible to control your lights from more than one point when you install a controller. A conventional switch can be used to switch on and off from several points, but only one of them can be a dimmer.

PHASE CUT

How does it work?
Lights are dimmed by cutting the mains voltage at the beginning (leading) or the end (trailing) of the phase.
Dimming: 10/20-100% depending on driver.
The driver may make a noise when dimmed and flickering can occur at the lowest levels.
What do I need?
You only need an L and N power source. An additional control cable is not required, but a phase cut-off regulator is.
The dimmer switch must be LED compatible. Always consider the compatibility of the dimmer switch with the driver and whether it is cutting at the trailing or leading end of the phase. The dimmer switch supplier can advise on compatibility.
Can I dim the lights in more than one place?
No. You cannot have more than one dimmer switch. You can only have one from a conventional ON-OFF switch (on and off only).

PUSH

How do they work?
The lights are dimmed with a switch, which is usually on. Press the push button quickly to turn the light on or off, and hold it in for the dimming function.
The range is from 1-5% to 100%.
Lighting may go out of synch when a single push button is used. It can usually be synchronised again by holding the button in for a specific time or using a pulse sequence determined by the driver.
What do I need?
All you need is a conventional push button without a pilot light.
No additional control pads are required.
PUSH dimmer switches require an L and N power supply plus an additional cable back to the push button. In some cases the driver needs an additional neutral input which must be bridged with the installation neutral.
Can I control my lights from more than one push button?
You can install several push buttons in a row for multi-point control. In this case, the wire back to the button must enter each driver in parallel and must not be bridged from driver to driver.
You can connect numerous lights to a single button, but the more lights you connect, the greater the risk of loss of synchronisation. The number of devices controlled by a push button depends on the driver (ask the technical team).

DALI

How does it work?
The Digital Addressable Lighting Interface (DALI) system allows you to control each DALI device. By device, we mean the driver and the sensor (not the luminaire). It uses a low-voltage bidirectional communication protocol to send and receive messages. DALI digitally controlled by a standard lighting control protocol under the IEC 62356 standard. Control from 1-5% to 100%
DALI keeps your lighting in sync.
Features:
DALI devices per BUS: 64
Number of DALI groups per BUS: 16
Number of DALI scenarios per BUS: 16
DALI Voltage: 9.5-22.5v, typically 16V
DALI system current: Max. 250 mA.
Maximum cable length: 300 m with a cross-section of 1.5 mm2
What do I need?
You need an L and N power supply plus two control signal wires. These control cables must be powered by a DALI BUS.
You also need regulators with DALI protocol support.
Can I dim the lights in more than one place?
There are two options: By means of DALI panels/interfaces directly connected to the DALI BUS that consume a DALI address for each panel placed and must be programmed; or through DALI dimmer switches that are connected to 230Vac and work by means of short presses to turn on/off and long presses to dim.

CÓMO REGULO?

1..10V

¿Cómo funciona?
El driver genera una señal analógica de 1V (mínimo) a 10V (máximo que llega a un controlador que regula la intensidad lumínica).
Regulación del 1 al 100%.
¿Qué necesito?
Se necesita una alimentación L y N más dos cables de control con polaridad + y – y un controlador compatible 1..10V
Si se quiere apagar se necesita colocar un regulador con ON-OFF o bien regular mediante driver 0..10V.
¿Puedo regular desde varios puntos?
No es posible regular desde varios puntos cuando se coloca un controlador. Se puede utilizar un interruptor convencional conmutado de manera que se pueda encender y apagar desde varios puntos pero sólo uno de ellos podrá regular.

CORTE DE FASE

¿Cómo funciona?
La regulación se realiza mediante corte de la onda de la tensión de red al inicio (leading) o al final (trailing) de la fase.
Regulación: 10/20-100% dependiendo del driver.
Puede generar ruido en el driver y al regular la intensidad al mínimo puede general flickering.
¿Qué necesito?
Sólo necesita alimentación L y N. No necesita cable adicional de control, pero sí un regulador de corte de fase.
El regulador debe de ser compatible con LED. Se debe de tener en cuenta la compatibilidad del regulador con el driver y si es corte por trailing o leading. Dicha compatibilidad la dará el proveedor del regulador.
¿Puedo regular desde varios puntos?
No se puede regular desde varios puntos. Sólo se puede regular desde un punto y conmutar el ON-OFF desde el interruptor convencional (sólo para encender y apagar).

PUSH


¿Cómo funciona?
Regulación a través de un pulsador normalmente abierto. La regulación se realiza con pulsaciones cortas para apagar/encender
y una pulsación mantenida para el control de la intensidad lumínica.
Regulación del 1-5% al 100%.
Puede aparecer desincronización en la regulación de las luminarias con un solo pulsador. Se suele re-sincronizar generalmente
con una pulsación mantenida durante un tiempo determinado o con una secuencia de pulsación determinada según el driver.
¿Qué necesito?
Se requiere de pulsadores convencionales sin piloto de luz y no necesita ningún tipo de pastilla de regulación adicional.
La regulación PUSH necesita de alimentación L y N más un cable adicional de vuelta al pulsador. En algunos casos el driver
puede necesitar una entrada adicional de neutro que debe de puentearse con el neutro de la instalación.
¿Puedo regular desde varios puntos?
Es posible colocar varios pulsadores en paralelo para control desde varios puntos. En este caso, el cable de vuelta al pulsador debe entrar a cada driver en paralelo y no se debe de puentear de un driver a otro.
Es posible colocar varios equipos a un mismo pulsador, pero a mayor cantidad de equipos mayor riesgo de desincronización.
El número de equipos soportados por un pulsador dependerá del driver (Consultar con el equipo técnico).

DALI

¿Cómo funciona?
El sistema de regulación DALI (Digital Adresable Lighting Interface) permite el control de cada dispositivo DALI. Se entiende por dispositivo el driver y el sensor (no la luminaria). Utiliza un protocolo de comunicación bidireccional de bajo voltaje que permite enviar y recibir mensajes.
Se regula de forma digital mediante un protocolo estándar de control de iluminación bajo el estándar IEC 62356. Regulación del 1-5% al 100%
Con DALI se evita cualquier tipo de desincronización.
Características:
Dispositivos DALI por cada BUS: 64
Cantidad de grupos DALI por cada BUS: 16
Cantidad de escenas DALI por cada BUS: 16
Tensión DALI: 9.5-22.5v, normalmente 16V
Corriente del sistema DALI: máx. 250mA.
Máxima longitud del cable: 300m con una sección transversal de 1.5mm2
¿Qué necesito?
Necesita alimentación L y N más dos cables de señal de control.
Estos cables de control deben de estar alimentados mediante un BUS DALI.
Además, son necesarios reguladores que deben de indicar su compatibilidad con protocolo DALI.
¿Puedo regular desde varios puntos?
Existen dos opciones: Mediante paneles/interfaces DALI conectados directamente al BUS DALI que consumen una dirección DALI por cada panel colocado y que deben de ser programados; o a través de interruptores reguladores DALI que van conectados a 230VaC y funcionan mediante pulsaciones cortas para encender/ apagar y pulsaciones mantenidas para regular.

TECH RECOMENDATIONS
RECOMENDACIONES TÉCNICAS


PUSH: OPTION 1




PUSH: OPTION 2



DALI



1-10 V




PHASE CUT




voltage control
como regulo

voltage control
como regulo

TECH RECOMENDATIONS
RECOMENDACIONES TÉCNICAS

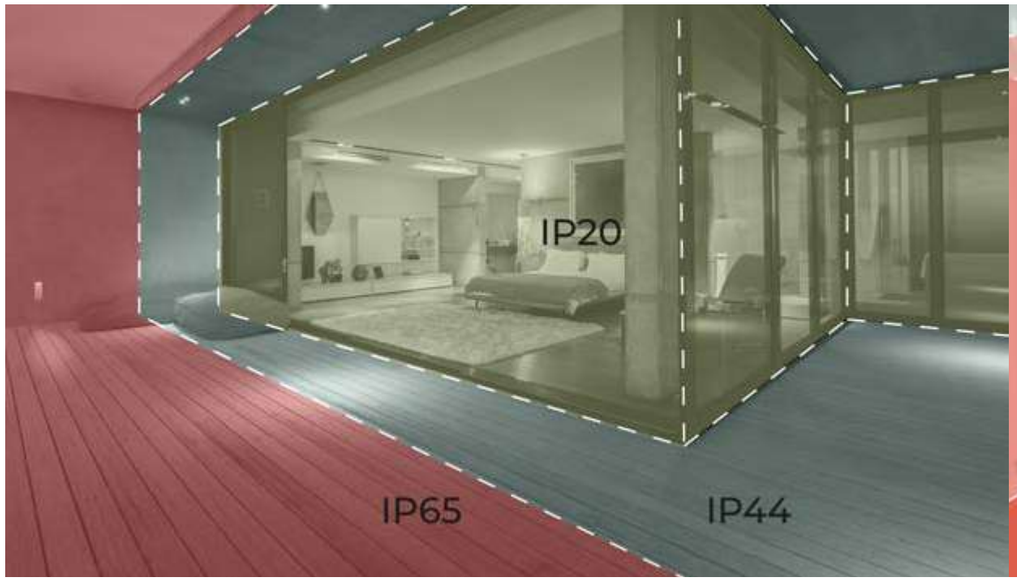

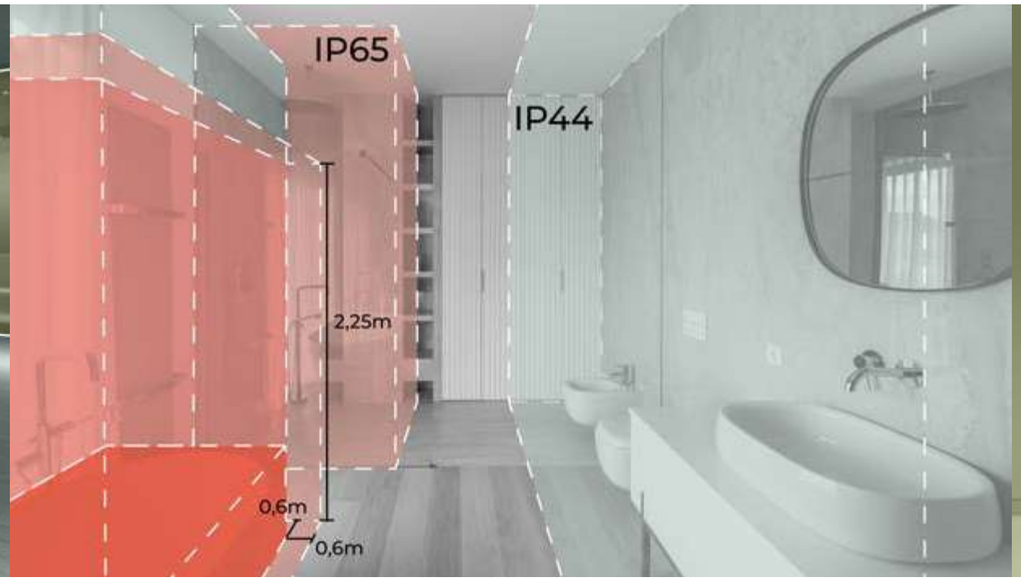




IK DEGREE
GRADO IK

The degree of protection IK is an international numerical classification for the degrees of protection provided by enclosures of electrical equipment against external mechanical impacts. This provides a means of specifying the ability of an enclosure to protect its contents from shock.

El grado de protección IK es una clasificación numérica internacional para los grados de protección proporcionados por las envolventes de materiales eléctricos contra los impactos mecánicos externos. Esto proporciona un medio para especificar la capacidad de un recinto para proteger su contenido de los golpes.

IK DEGREE *GRADO IK*	PROTECTION AGAINST EXTERNAL MECHANICAL IMPACTS *PROTECCIÓN CONTRA IMPACTOS MECÁNICOS EXTERNOS*	DESCRIPTION *DESCRIPCIÓN*
IK00	No protection / *Sin proteger*	
IK01	Protected against 0.150J impact. *Protegido contra impacto de energía 0.150J.*	Resistant against an impact of an object of 200 grs launched from a distance of 7.5 cm. *Resistente contra un impacto de un objeto de 200 grs lanzado desde una distancia de 7,5 cm.*
IK02	Protected against 0.200J impact. *Protegido contra impacto de energía 0.200J.*	Resistant against an impact of an object of 200 grs launched from a distance of 10 cm. *Resistente contra un impacto de un objeto de 200 grs lanzado desde una distancia de 10 cm.*
IK03	Protected against 0.350J impact. *Protegido contra impacto de energía 0.350J.*	Resistant against an impact of an object of 200 grs launched from a distance of 17.5 cm. *Resistente contra un impacto de un objeto de 200 grs lanzado desde una distancia de 17,5 cm.*
IK04	Protected against 0.500J impact. *Protegido contra impacto de energía 0.500J.*	Resistant against an impact of an object of 200 grs launched from a distance of 25 cm. *Resistente contra un impacto de un objeto de 200 grs lanzado desde una distancia de 25 cm.*
IK05	Protected against 0.700J impact. *Protegido contra impacto de energía 0.700J.*	Resistant against an impact of an object of 200 grs launched from a distance of 35 cm. *Resistente contra un impacto de un objeto de 200 grs lanzado desde una distancia de 35 cm.*
IK06	Protected against 1.00J impact. *Protegido contra impacto de energía 1.00J.*	Resistant against an impact of an object of 500 grs launched from a distance of 20 cm. *Resistente contra un impacto de un objeto de 500 grs lanzado desde una distancia de 20 cm.*
IK07	Protected against 2.00J impact. *Protegido contra impacto de energía 2.00J.*	Resistant against an impact of an object of 500 grs launched from a distance of 40 cm. *Resistente contra un impacto de un objeto de 500 grs lanzado desde una distancia de 40 cm.*
IK08	Protected against 5.00J impact. *Protegido contra impacto de energía 5.00J.*	Resistant against an impact of an object of 1,7 kg launched from a distance of 29,5 cm. *Resistente contra un impacto de un objeto de 1,7 kg lanzado desde una distancia de 29,5 cm.*
IK09	Protected against 10.00J impact. *Protegido contra impacto de energía 10.00J.*	Resistant against an impact of an object of 5 kg launched from a distance of 20 cm. *Resistente contra un impacto de un objeto de 5 kg lanzado desde una distancia de 20 cm.*
IK10	Protected against 20.00J impact. *Protegido contra impacto de energía 20.00J.*	Resistant against an impact of an object of 5 kg launched from a distance of 40 cm. *Resistente contra un impacto de un objeto de 5 kg lanzado desde una distancia de 40 cm.*

CLASS PROTECTION
CLASES DE PROTECCIÓN




Class I:

Light fittings in which protection against electric shocks does not depend solely on the mains insulation, but instead contain an extra safety measure in the form of a circuit from the accessible conductive parts with an grounded protective conductor forming part of the installation's fixed wiring, so that the accessible conductive parts do not become dangerous should there be a defect in the mains insulation. Ground conductor is coloured green&yellow in most countries, and just green in the U.S., Canada and Japan.

Clase I:

Luminarias en la que la protección contra los choques eléctricos no recae exclusivamente sobre el aislamiento principal, sino que comprende una medida de seguridad suplementaria bajo la forma de medios de conexión de las partes conductoras accesibles con un conductor de protección puesto a tierra, formando parte del cableado fijo de la instalación, de tal manera que las partes conductoras accesibles no puedan llegar a ser peligrosas, en caso de defecto del aislamiento principal. La toma tierra es de color amarillo y verde en la mayoría de los países, y verde en los Estados Unidos, Canadá y Japón.




Class II:

A Class II or double insulated electrical appliance is one which has been designed in such a way that it does not require a safety connection to electrical ground. The basic requirement is that no single failure can result in dangerous voltage becoming exposed so that it might cause an electric shock and that this is achieved without relying on an earthed metal casing. This is achieved having two layers of insulating material surrounding live parts or by using reinforced insulation.

Clase II:

Dispositivo de Clase II o aparato con doble aislamiento eléctrico es uno que ha sido diseñado de tal forma que no requiere una toma a tierra de seguridad eléctrica. El requisito básico es que un fallo simple no puede dar lugar a tensiones peligrosas que puedan causar una descarga eléctrica. Esto se consigue mediante dos capas de material aislante rodeando las partes con tensiones peligrosas o utilizando un aislamiento reforzado.



Class III:

A Class III appliance is designed to be supplied from a separated/safety extra-low voltage (SELV) power source. The voltage from a SELV supply is low enough that under normal conditions a person can safely come into contact with it without risk of electrical shock. The extra safety features built into Class I and Class II appliances are therefore not required. For medical devices compliance with Class III is not considered sufficient protection.

Clase III:

Un aparato de Clase III está diseñado para ser alimentado por una fuente de alimentación SELV (por sus siglas en inglés: "Separated or Safety Extra-Low Voltage"). La tensión de una fuente de SELV es lo suficientemente baja para que, en condiciones normales, una persona puede entrar en contacto con ella sin correr el riesgo de descarga eléctrica. Por tanto, no es necesario incorporar la seguridad que llevan los aparatos de Clase I y Clase II. Para el cumplimiento de los dispositivos médicos la Clase III no se considera suficiente para su protección.



GENERAL TERMS AND CONDITIONS OF SALE

All orders must be placed with BPM Iluminación S.L in writing by email, and customers hereby accept the terms and conditions detailed below. Goods supplied by the Company shall remain the property of BPM Iluminación S.L until payment is received, even if the goods have been sold to a third party. Delivery times are approximate and non-binding. BPM Iluminación S.L will not accept claims for damages due to late delivery. BPM Iluminación S.L reserves the right to amend, supplement or delete, without prior warning, the characteristics or designs of the products in this catalogue, as well as the corresponding prices. Therefore, customers are advised to contact BPM Iluminación S.L directly for the latest information. BPM Iluminación S.L is not responsible for the loss or damage of goods during transport by agencies. In accordance with Article 1 of Royal Decree 5/1997 of 14 January, complaint forms are available to our customers at the Company's registered office.

CANCELLING AN ORDER

Orders must be cancelled in writing and sent to BPM Iluminación S.L by email. If the order has already been dispatched, please request a refund, in accordance with the terms and conditions detailed in the following section.

RETURNING GOODS BPM

Lighting reserves the right to accept or reject return requests received. Returns must be made within 2 weeks of the invoice date, and a minimum depreciation rate of 5% will be applied to cover handling costs.

RETURN TERMS AND CONDITIONS

Return requests must be made in writing by email. Please send all returns correspondence to the following email address: info@bpmlighting.com. In order to submit a request, please use the returns form provided by BPM Iluminación S.L, stating, at the very least, the reason for the return, article reference number(s), quantity, item condition, date and invoice number. If the return is authorised: The item must be returned in its original packaging and in perfect condition. BPM Iluminación S.L must receive the goods within a maximum of 10 days after the return has been authorised. Any costs for returning the goods are the responsibility of the customer. Returned goods will not be accepted in the case of discontinued or customised items (manufactured specifically for the customer). Please send the item, together with the documentation required by the Sales Department, to the following address: Partida Madrigueres Sud, 11, 03700 Dénia (Alicante), Spain.

WARRANTY

BPM Iluminación S.L guarantees its luminaires and all the components it distributes.

1. BPM Iluminación S.L products are guaranteed against any manufacturing defects (components and labor) for a period of 5 years from the date of purchase.

2. On the basis of this warranty, BPM Iluminación S.L. is only obligued to repair or replace the product or defective part returned to BPM Iluminación S.L.

3. In any case, the guarantee does not include installation, assembly or disassembly costs....

The warranty period starts from the date of issue of the original invoice from BPM Iluminación S.L, and under no circumstances shall it be renewed by replacing a component in a repair or by replacing the complete item.

WARRANTY TERMS AND CONDITIONS

Incident claims (for products that are damaged, faulty, incorrect, or any other cause for complaint upon delivery) must be made in writing by email. Please send all incident claims to the following email address: info@bpmlighting.com. In order to submit an incident claim, please use the incident form provided by BPM Iluminación S.L, stating, at the very least, the reason for the incident, article reference number(s), quantity, date and invoice number. If the incident claim is authorised by invoking the warranty: The Sales Department will provide an incident code to process the claim. Please send the item, together with the documentation required by the Sales Department and the incident code, to the following address: Partida Madrigueres Sud, 11, 03700 Dénia (Alicante), Spain. Once BPM Iluminación S.L has authorised the collection of the item due to an incident, and once the Technical Department has verified that BPM Iluminación S.L is responsible for the source of the incident, the postage will be covered by BPM Iluminación S.L. These warranty terms and conditions do not affect the consumer's statutory rights under the current applicable legislation.

WARRANTY INVALIDATION CLAUSES

Improper use, handling or maintenance of a device, luminaire or component by the customer.
Improper repair, modification or extension of a luminaire or device by the customer.
Deterioration, removal or concealment of the BPM Iluminación S.L identification label by the customer. In any event, the warranty shall not be valid for items with obvious signs of improper handling.
Defects and damage caused by external events, accidents (in particular electrical accidents), wear and tear, and use not in accordance with BPM Iluminación S.L's instructions are excluded from any warranty.
BPM Iluminación S.L is not responsible for any product errors or breakages during shipping. - If a defect or breakage is not approved by BPM Iluminación S.L's Technical Department, the item will be returned cash on delivery.

SALES CONDITIONS

CONDICIONES GENERALES DE VENTA

Todos los pedidos deberán ser formulados a BPM Iluminación S.L. por escrito vía e-mail, quedando aceptadas por el cliente las condiciones escritas a continuación.
La mercancía suministrada por la Empresa, será propiedad de BPM Iluminación S.L. hasta el momento de pago, aunque dicha mercancía hubiese sido vendida a un tercero.
Los plazos de entrega son aproximados y sin compromiso. BPM Iluminación S.L. no aceptará demandas por daños y perjuicios por la demora en la entrega.
BPM Iluminación S.L. se reserva el derecho de modificar, complementar o suprimir, sin previo aviso, las características o diseños de los productos presentes en este catálogo, así como sus correspondientes tarifas. Por este motivo, se recomienda al cliente ponerse en contacto directamente con BPM Iluminación S.L. para obtener una información actualizada.
La pérdida o deterioro de la mercancía durante el transporte por agencia no es responsabilidad de BPM Iluminación S.L.
De acuerdo con el art. 1 del RD 5/1997 14 Enero, existen a disposición de nuestros clientes hojas de reclamación en el domicilio social de la Empresa.



ANULACIÓN DE PEDIDOS

Las anulaciones de pedidos deberán hacerse por escrito y notificarse a BPM Iluminación S.L. vía e-mail. En caso de que el pedido ya se hubiese enviado, deberá solicitarse la devolución del mismo, acogiéndose a las condiciones detalladas en el siguiente apartado.

DEVOLUCIÓN DE MERCANCÍA

BPM Iluminación S.L. se reserva el derecho de autorizar y aceptar las solicitudes de devolución recibidas. En cualquier caso, se requerirá que no hayan transcurrido 15 días desde la fecha de la factura, y se aplicará una depreciación mínima del 5% por los costes de gestión.

CONDICIONES DE DEVOLUCIÓN

La solicitud de devolución deberá formalizarse por escrito vía e-mail.
Las devoluciones deberán tramitarse en la siguiente dirección de correo: info@bpmlighting.com.

Para presentar la solicitud deberá utilizarse el formulario de devolución habilitado por BPM Iluminación S.L., donde se hará constar, al menos, el motivo de la devolución, referencia de artículo/s, cantidad, estado del material, fecha y número de factura.
En el caso de que la devolución fuera autorizada:
El material deberá devolverse en su embalaje original y en perfecto estado de conservación.
BPM Iluminación S.L. deberá recibir la mercancía en un plazo máximo de 10 días desde la autorización de la devolución.
Los portes de la devolución serán asumidos por el cliente.
No se admitirán devoluciones de mercancía en el caso de material descatalogado o customizado (fabricado expresamente para el cliente).
El material deberá ser enviado, junto con la documentación requerida por el Área Comercial, a la siguiente dirección: Partida Madrigueres Sud, 11, 03700 Dénia (Alicante).

GARANTÍA

BPM Iluminación S.L. garantiza sus luminarias, así como los equipos que distribuye.

1 - Los productos de BPM Iluminación, S.L. están garantizados contra cualquier defecto de fabricación (componentes y mano de obra) durante un periodo de 5 años a partir de la fecha de compra.

2 - En razón de esta garantía, sólo incumbe a BPM Iluminación, S.L. la obligación de reparar o reemplazar el producto, o la pieza reconocidos como defectuosos y devueltos a BPM Iluminación, S.L.

3 - En cualquier caso, la garantía no incluye los gastos de instalación, montaje o desmontaje....

El plazo de garantía se inicia a partir de la fecha de emisión de factura originaria de BPM Iluminación S.L., no pudiendo ser renovado en ningún caso por sustitución de un componente en una reparación o reposición del artículo completo.

CONDICIONES DE GARANTÍA

La reclamación por incidencia (que el producto se entregue deteriorado, averiado, equivocado, o cualquier otra causa susceptible de reclamación), deberá formalizarse por escrito vía e-mail.
Las reclamaciones por incidencia deberán tramitarse en la siguiente dirección de correo: info@bpmlighting.com.

Para presentar la reclamación de incidencia deberá utilizarse el formulario de incidencia habilitado por BPM Iluminación S.L., donde se hará constar, al menos, el motivo de la incidencia, referencia de artículo/s, cantidad, fecha y número de factura.
En el caso de que la reclamación por incidencia fuera autorizada invocando la garantía:

El Área Comercial proporcionará un código de incidencia para la tramitación. El material deberá ser enviado, junto con la documentación requerida por el Área Comercial, con referencia al código de incidencia facilitado, a la siguiente dirección: Partida Madrigueres Sud, 11, 03700 Dénia (Alicante).

Autorizada por BPM Iluminación S.L. la recogida del material por incidencia, y una vez verificada por el Área Técnica la responsabilidad del origen de la incidencia de BPM Iluminación S.L. , los portes serán asumidos por BPM Iluminación S.L. .
Estas condiciones de garantía no afectan a los derechos estatutarios del consumidor amparados por la legislación vigente aplicable.

CLÁUSULAS DE ANULACIÓN DE LA GARANTÍA

Incorrecta utilización, manipulación o mantenimiento por parte del cliente de un equipo, luminaria o componente.
Incorrecta reparación, modificación o ampliación por parte del cliente de una luminaria o un equipo.
Deterioro, eliminación u ocultación, por parte del cliente, de la etiqueta identificativa de BPM Iluminación S.L.
En cualquier caso, no se asumirá la garantía del material con muestras evidentes de una manipulación incorrecta.
Quedan excluidos de toda garantía los defectos y deterioros producidos por hechos externos, accidentes, principalmente accidentes eléctricos, por desgaste y por utilización no conforme a las instrucciones de BPM Iluminación S.L.
BPM Iluminación S.L. no se responsabiliza de los errores o roturas producidas en el envío del producto.
En caso de defecto o rotura no validada por el Área Técnica de BPM Iluminación S.L., se procederá a la devolución del material a portes debidos.

CONDICIONES DE VENTA